
EXCELSIOR IN-4

12V MR16 35W Halogen/8W LED In Ground Well Light



IN-4 Shown in Bronze Texture Powder Coat Finish (BZT)

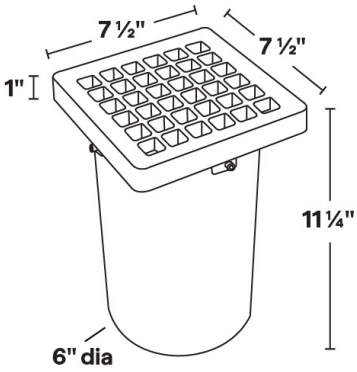

Dimensions: 7 1/2 " square x 11 1/4" high

- Bronze frame and grate.
- 10 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- ABS housing: 6"dia. x 10 1/2" OAL.
- Tempered glass lens.
- 6' of 16/2 low voltage cable supplied.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 bi pin porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.

1 PRODUCT	2 MATERIAL	3 FIXTURE REGRESS	4 FINISH
IN-4	B		

Sample Part Number: **IN-4-B-1-NT**

1 PRODUCT

IN-4	

2 MATERIAL

B	Bronze

3 FIXTURE REGRESS

1	1 3/4" Regress
2	3" Regress (standard)

4 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White
DB	Dark Bronze
P	Polished

DB finish has longer lead time

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

EXCELSIOR IN-4

12V MR16 35W Halogen/8W LED In Ground Well Light

1 PRODUCT - DIMENSIONS



2 MATERIAL

Bronze

4 FINISH

Eight Standard TGIC Free powder coat finishes and two bronze finishes

Beige
Black
Black Texture
Bronze
Bronze Texture
Black Bronze
Dark Bronze
Natural
Silver
White

ACCESSORIES - LENS

Holds up to three accessories

SP	LI	SO	LV	WI	FR
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

EXCELSIOR IN-4

12V MR16 35W Halogen/8W LED In Ground Well Light

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W halogen/8W LED

MR16



EMERY ALLEN

1.0W, 3.0W, 5.0W, 7.0W, 8.0W

MR16



EMERY ALLEN

3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting