
EXCELSIOR RL-2

12V MR16 35W Halogen/8W LED Pendant Light



RL-2 Shown in Bronze Texture Powder Coat Finish (BZT)

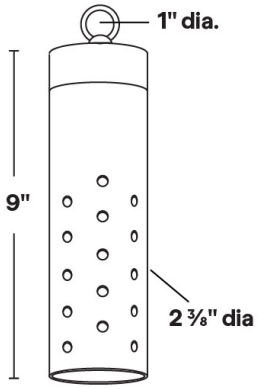

Dimensions: 2 3/8" dia. x 9"

- 1" brass loop for mounting. Hanging hook included.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- SS Cable and lead wire options.
- Stainless steel hardware.
- 12" of 18 ga. Teflon wire leads"
- Frosted acrylic liner.
- Optional frosted lens glued in at bottom of fixture.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for pendant mounted downlighting applications. Can be utilized for pergola, tree-mounted, and other exterior installations.

1 PRODUCT	2 MATERIAL	3 BOTTOM LENS	4 SS CABLE	5 18/ 2 WIRE	6 FINISH
RL-2	A				

Sample Part Number: **RL-2-A-1-0-0-BK**

1 PRODUCT

RL-2

2 MATERIAL

A Aluminum

3 BOTTOM LENS

0 No Lens
1 Frosted (Glued in)

4 SS CABLE

0 No SS Cable
5 5' SS Cable
10 10' SS Cable
15 15' SS Cable
20 20' SS Cable
25 25' SS Cable
30 30' SS Cable

5 18/2 WIRE

0 Standard 12" Wire
5 Extra 5' Wire
10 Extra 10' Wire
15 Extra 15' Wire
20 Extra 20' Wire
25 Extra 25' Wire
30 Extra 30' Wire

12" wire is standard. Length selected will be added to the standard 12" wire length.

6 FINISH

BG Beige
BB Black Bronze
BK Black
BKT Black Texture
BZ Bronze
BZT Bronze Texture
SL Silver
WH White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

EXCELSIOR RL-2

12V MR16 35W Halogen/8W LED Pendant Light

1 PRODUCT - DIMENSIONS



2 MATERIAL

Aluminum

6 FINISH

Eight Standard TGIC Free powder coat finishes

Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Silver

White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

EXCELSIOR RL-2

12V MR16 35W Halogen/8W LED Pendant Light

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16



EMERY ALLEN

1.0W, 3.0W, 5.0W, 7.0W, 8.0W

MR16



EMERY ALLEN

3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting