
EXCELSIOR PL-7L

12V MR16 9W LED Staff Light



PL-7L Shown in Bronze Texture Powder Coat Finish (BZT)

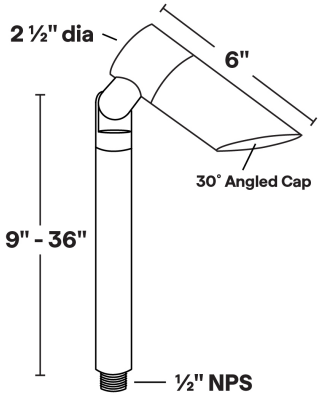

Dimensions: 2 3/8" dia. x 7 1/2"

- Available in three Cap Styles: Flush, 1" Regress, 30° Angled
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 9 watt LED (12W Startup Draw))
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi-Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 CAP	4 STEM LENGTH	5 FINISH	6 WATTAGE	7 CCT	8 LENS
PL-7L	A				9.0		

Sample Part Number: **PL-7L-A-1-24-BK-9.0-27-30**

1 PRODUCT

PL-7L	

2 MATERIAL

A	Aluminum

3 CAP

1	Flush
2	Regress
3	30 Degree

4 STEM LENGTH

9	9" Stem Length
12	12" Stem Length
18	18" Stem Length
24	24" Stem Length
30	30" Stem Length
36	36" Stem Length

5 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

6 WATTAGE

9.0	9.0W

7 CCT

27	2700K
30	3000K
40	4000K

8 LENS

15	15 Degree Lens
30	30 Degree Lens
45	45 Degree Lens
60	60 Degree Lens

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26


EXCELSIOR PL-7L

12V MR16 9W LED Staff Light

1 PRODUCT - DIMENSIONS







2 MATERIAL

Aluminum

5 FINISH

Eight Standard TGIC Free powder coat finishes

Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Silver

White

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

EXCELSIOR 9W LED MODULE

MR16 LED MODULE



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

LED LENS



15° Lens



30° Lens



45° Lens



60° Lens

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting