
EXCELSIOR DL-10L

12VAC/DC MR16 9W LED Down Light



DL-10L Shown in Bronze Texture Powder Coat Finish (BZT)

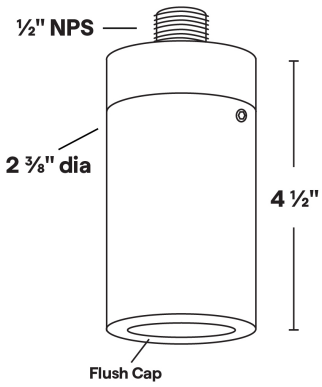

Dimensions: 2 3/8" dia. x 4 1/2"

- Flush lens cap; holds up to one accessory.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- Input Voltage: 12VAC/DC (remote magnetic transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 STEM LENGTH	5 FINISH	6 WATTAGE	7 CCT	8 LENS
DL-10L	A				9.0		

Sample Part Number: **DL-10L-A-1-0-BK-9.0-27-30**

1 PRODUCT

DL-10L	

2 MATERIAL

A	Aluminum

3 MOUNTING PLATE

1	Q-MT-25
2	Q-MT-27
3	Q-MT-11
4	Q-MT-21

4 STEM LENGTH

0	No Stem
3	3" Stem Length
6	6" Stem Length
9	9" Stem Length
12	12" Stem Length
18	18" Stem Length

5 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

6 WATTAGE

9.0	9.0W

7 CCT

27	2700K
30	3000K
40	4000K

8 LENS

15	15 Degree Lens
30	30 Degree Lens
45	45 Degree Lens
60	60 Degree Lens

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-11-11-26

EXCELSIOR DL-10L

12VAC/DC MR16 9W LED Down Light

1 PRODUCT - DIMENSIONS



2 MATERIAL

Aluminum

3 MOUNTING PLATE

1/2" NPS Mounting Thread

1	2	3	4
			
4/0 Round Mounting Plate	3/0 Round Mounting Plate	Surface Mount Kit	Surface Mount Canopy
Q-MT-25	Q-MT-27	Q-MT-11	Q-MT-21

5 FINISH

Eight Standard TGIC Free powder coat finishes

Beige

Black

Black Texture

Bronze

Bronze Texture

Black Bronze

Silver

White

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-11-11-26

EXCELSIOR DL-10L

12VAC/DC MR16 9W LED Down Light

ACCESSORIES - LENS

Holds up to one accessory

SP	LI	SO	LV	WI	FR
					
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

EXCELSIOR 9W LED MODULE

MR16 LED MODULE



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

LED LENS



15° Lens



30° Lens



45° Lens



60° Lens

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting