



TORQ



Field Assembled Extrusion - Surface & Recessed



Declare.



SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

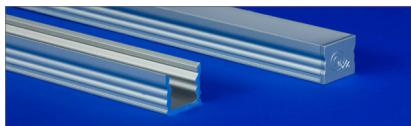

- Ideal for surface mounted or recessed installations
- Pair with an optional mounting tray for a 60° or 70° beam angle
- Combine TORQ with White Optics to increase light output between 5-52%

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
				NI	

Sample Part Number: **TORQ-ST-SST-12DEG-NI-48"**

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
TORQ TORQ-WO WO - WhiteOptics (Internal coating, greater lumen output)	ST Satin BK Black BZ Bronze CU Custom Color	SST Stainless Steel M4 Low Profile Magnet MG Magnet	DF Diffused PR Polar FR Frosted CL/60 Clear 60° CL/70 Clear 70° 12DEG Optical 12° 40DEG Optical 40°	NI Not Installed	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

For representation of LED visibility, see Diode Visibility section on following pages.
 For beam angles, see Photometric Performance section on following pages.
 40DEG lens is only compatible with DRY and DMP rated LEDs.
 For optional snap-on louver ordering, see External Louver Accessory section on following pages.

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 15.3.0, 4.0, 5.0	✓ W/FT: 10.2.0, 4.0, 6.0	✓ W/FT: 15.3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0				✓ W/FT: 15.2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0, 8.0 NO CLEAR LENS
DMP	✓ W/FT: 15.3.0, 4.0, 5.0		✓ W/FT: 15.3.0, 6.0					✓ W/FT: 15.2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0 NO CLEAR LENS
ENC	✓ W/FT: 15.3.0, 4.0, 5.0		✓ W/FT: 15.3.0, 6.0					✓ W/FT: 15.2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
WET	✓ W/FT: 15.3.0, 4.0, 5.0	✓ W/FT: 10.2.0, 4.0								✓ W/FT: 5.0			

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount | Two different cut off angles: CL/60 and CL/70 | Painted end caps match the extrusion finish and have a white painted interior. Satin end caps utilize a metallic paint.




TORQ

Field Assembled Extrusion - Surface & Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶


1 PRODUCT - DIMENSIONS

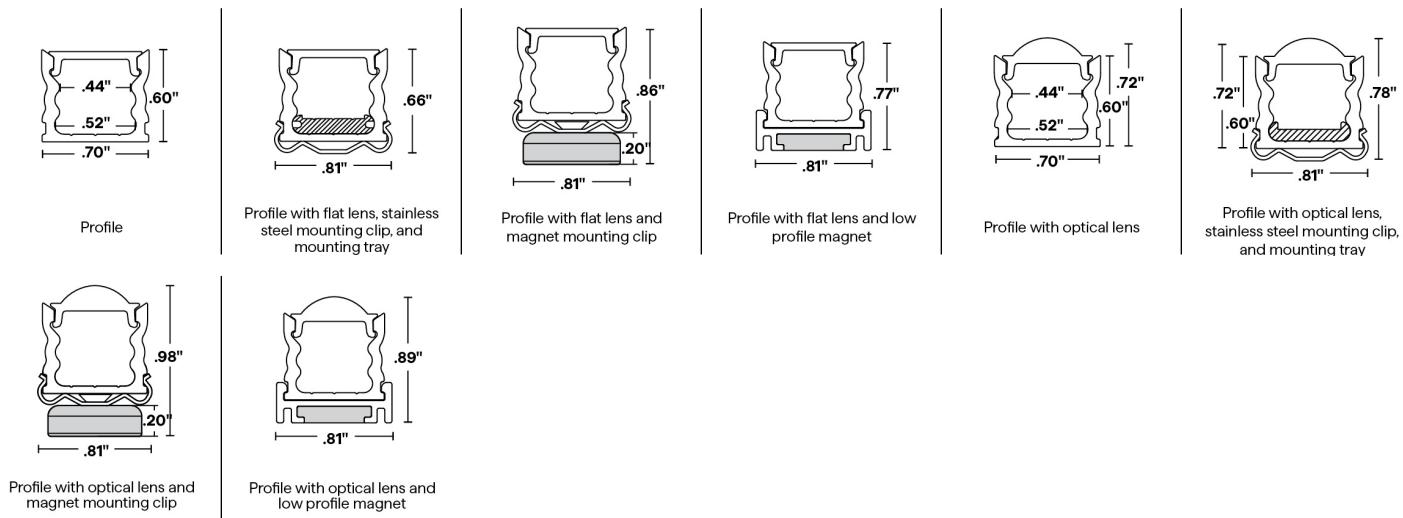

END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps



No feed

Feed, no tray


Feed with tray

To order separately, use
TORQ-EC or TORQ-EC-CL/70

To order separately, use
TORQ-EC

To order separately, use
TORQ-EC-CL/70

Optical end caps

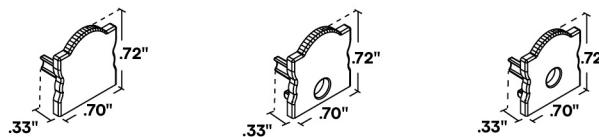

No feed

Feed, no tray

Feed with tray

To order separately, use
TORQ-EC-12DEG or TORQ-
EC-40DEG


To order separately, use
TORQ-EC-40DEG

WHITEOPTICS® PHOTOMETRICS

[Calculated L70(6k) - 70000 hours] Tested with SW24/5.0-DRY-30

	TORQ LM/FT		TORQ-WO LM/FT		TORQ-WO Lumen Increase	
	Satin	Black/Bronze	Satin	Black/Bronze	Satin	Black/Bronze
Clear	346	277	365	350	5%	26%
Frosted	298	235	326	315	9%	34%
Polar	281	208	312	291	11%	40%
Diffused	245	168	270	256	10%	52%

2 FINISH



Custom finishes require
a longer lead time,
consult factory




TORQ

Field Assembled Extrusion - Surface & Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

3 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01


Each clip comes with a #4 x 5/8" Flat Head SS



Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface




Magnet Clip

One MG provided per foot.

To order separately use MG-01

MMA-01



Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface

4 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens

FR - Frosted lens

CL - Clear lens

Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.



Clear 60°



Clear 70°



Optical 12°



Optical 40°
DRY and DMP rated
LEDs only


**TORQ**

Field Assembled Extrusion - Surface & Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

EXTERNAL LOUVER ACCESSORY

When using 40DEG option with a side feed input/output, routing will be necessary on the plastic louver to ensure unobstructed wire exits.

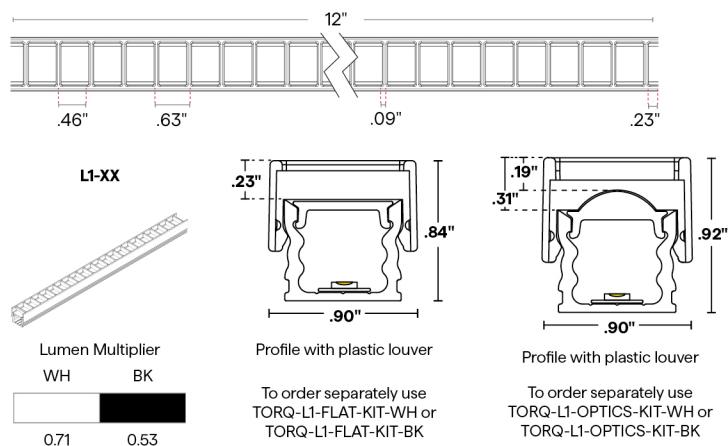PLASTIC

COMPATIBLE ACCESSORIES

