
FLOOD ACCENT END MOUNT (MR16 THREADING)

Flood Accent

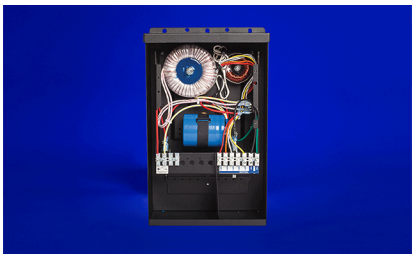

- Utilize Advance Xiantium drivers with 0-10V dimming modules
- LED Module is field replaceable
- GY 6.35 bi pin socket
- Machined aluminum construction
- Flush lens cap
- Utilize Advance Xiantium drivers with 0-10V dimming modules
- LED Module is field replaceable
- GY 6.35 bi pin socket
- Machined aluminum construction
- Flush lens cap

1 PRODUCT	2 KNUCKLE	3 CAP OPTIONS	4 LED	5 WATTS	6 CCT	7 BEAM ANGLE	8 VOLTAGE	9 GLARE SHIELD	10 ACCESSORY 1	11 ACCESSORY 2	12 ACCESSORY 3	13 MATERIAL	14 FINISH
FA-EM-MR16T							12VAC						

Sample Part Number: **FA-EM-MR16T-ST-SF-MDL-EXC-9-A9-4-30-45D-12VAC-SR-BG-SP-N/A-BR-BK**

1 PRODUCT

FA-EM-MR16T

2 KNUCKLE

ST Standard
JN Jam Nut
RL Rotational Locking

3 CAP OPTIONS

SF Short Flush
1R 1" Regress
45D 45°

4 LED

MR16-SRA-V-SW
Retrofit Soraa MR16 Vivid

MR16-SRA-B-SW
Retrofit Soraa MR16 Brillant

MR16-SRA-T-SW
Retrofit Soraa MR16 Title 20

MR16-EXC-SW
Retrofit Excelsior MR16

MR16-EXC-SC
Retrofit Excelsior MR16

N/A
No Lamp

5 WATTS

7.5 7.5W

3.0 3.0W

4.0 4.0W
5.0 5.0W
6.0 6.0W
7.0 7.0W

5.0 5.0W Amber Light

N/A N/A

6 CCT

27 2700K
30 3000K
40 4000K
See Chart for Lumens and CRI

27 2700K
30 2700K
See Chart for Lumens and CRI

27 2700K
30 3000K
See Chart for Lumens and CRI

27 2700K
30 3000K
See Chart for Lumens and CRI

A Amber
See Chart for Lumens and CRI

N/A N/A

7 BEAM ANGLE

10D Optical 10
25D Optical 25
36D Optical 36

10D Optical 10
25D Optical 25
36D Optical 36

15D Optical 15
24D Optical 24
38D Optical 38
60D Optical 60
100D Optical 100

15D Optical 15
30D Optical 30
45D Optical 45
60D Optical 60
100D Optical 100

30D Optical 30

N/A N/A

8 VOLTAGE

12VAC

See chart for detailed visual explanation.

9 GLARE SHIELD

SR Straight
45DA 45 Degree Angle

See chart for detailed visual explanation.

10 11 12 ACCESSORY 1, 2, 3

LBG Light Blue Glass Filter
BG Blue Glass Filter
PG Pink Glass Filter
AG Amber Glass Filter
MVG Mercury Vapor Glass Filter
RG Red Glass Filter
GG Green Glass Filter
SP Spread Lens
LI Linear Lens
SO Solite Lens
FR Frosted Lens
SB Sandblasted Lens
LV Louver
N/A No Accesssory

Wire Holder included with each lens

13 MATERIAL

AL Aluminum

See chart for material part break down

BR Brass

See chart for material part break down

14 FINISH

BK Black
BZ Bronze
WT White
BG Beige
BKT Black Texture
BVT Bronze Texture
SL Silver
AC Aged Copper
NT Natural
DB Dark Bronze

BK Black
BZ Bronze
WT White
BG Beige
BKT Black Texture
BVT Bronze Texture
SL Silver
AC Aged Copper
NT Natural
DB Dark Bronze


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

FLOOD ACCENT END MOUNT (MR16 THREADING)

Flood Accent

1 PRODUCT - DIMENSIONS

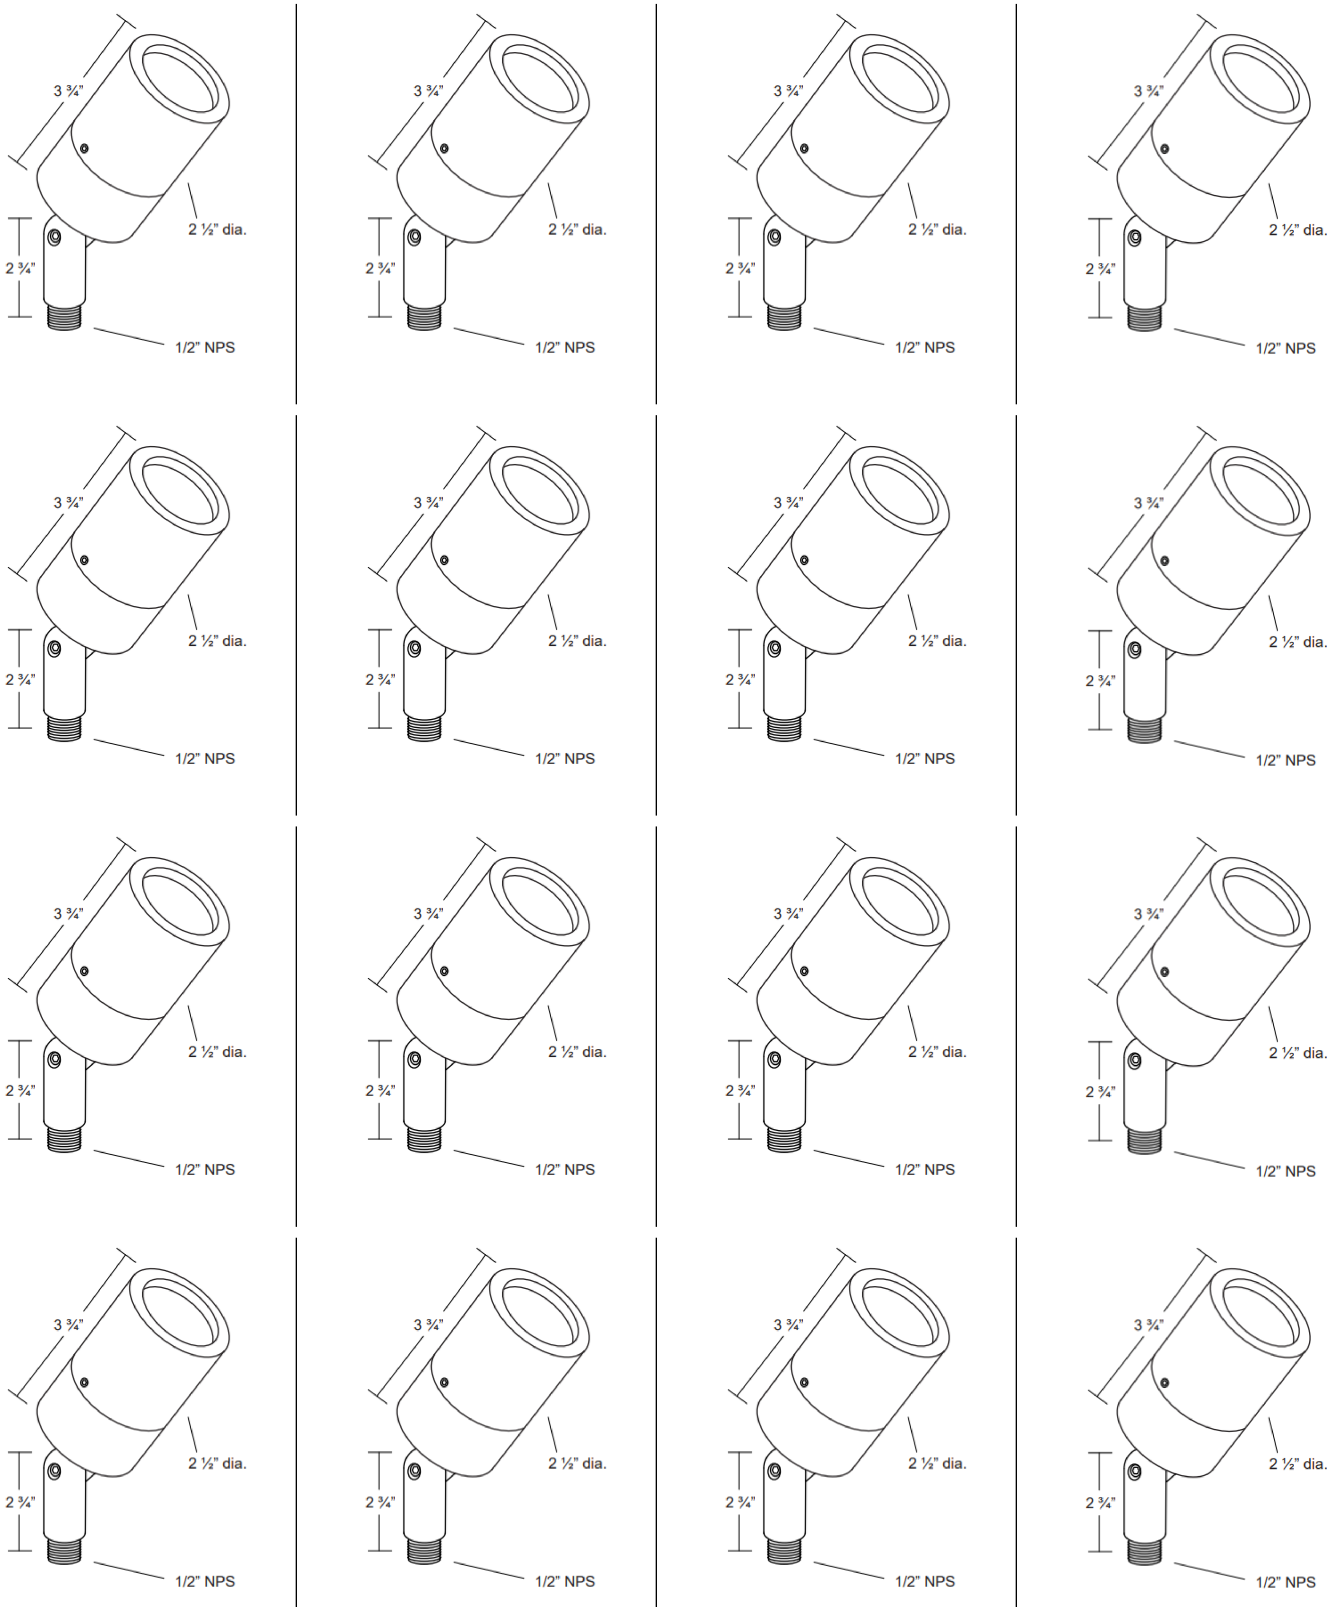


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

FLOOD ACCENT END MOUNT (MR16 THREADING)

Flood Accent

2 KNUCKLE OPTIONS

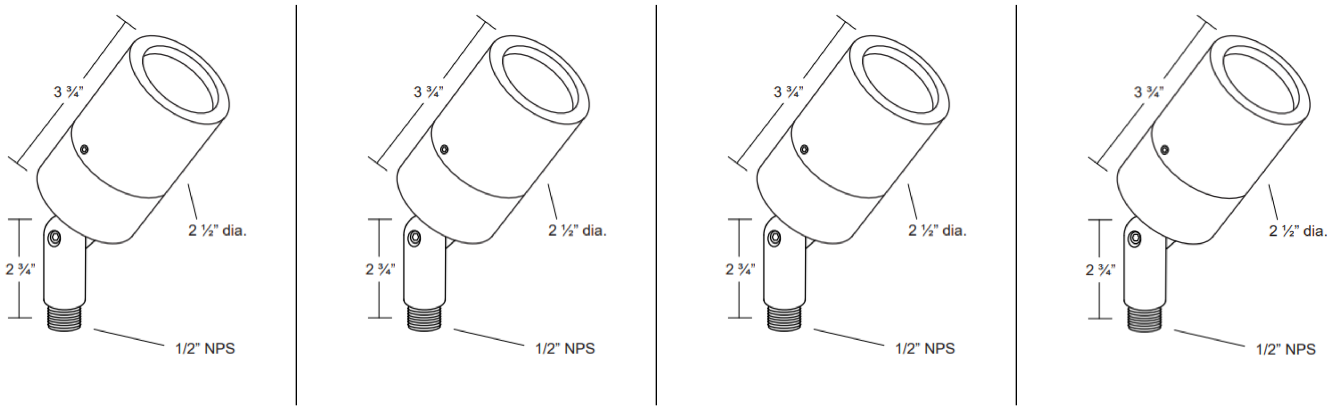

5 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]
Tested with TQ1SW-**-30-DRY-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		3.0HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		6.0HE+ W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	127	98	153	98	222	98	281	98	405	92	276	98	336	98	532	98	749	92	800	98
PR	111	98	138	98	193	98	252	98	364	92	240	98	293	98	478	98	673	92	719	98
DF	98	98	124	98	171	98	228	98	329	92	213	98	259	98	432	98	608	92	649	98

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]
Tested with TQ1SW-**-30-DRY-WO

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		3.0HE+ W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		6.0HE+ W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	139	98	168	98	242	98	308	98	444	92	301	98	366	98	584	98	821	92	877	98
PR	126	98	152	98	220	98	279	98	402	92	274	98	334	98	528	98	743	92	793	98
DF	113	98	135	98	197	98	247	98	357	92	245	98	299	98	469	98	660	92	705	98


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

FLOOD ACCENT END MOUNT (MR16 THREADING)

Flood Accent

7 PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

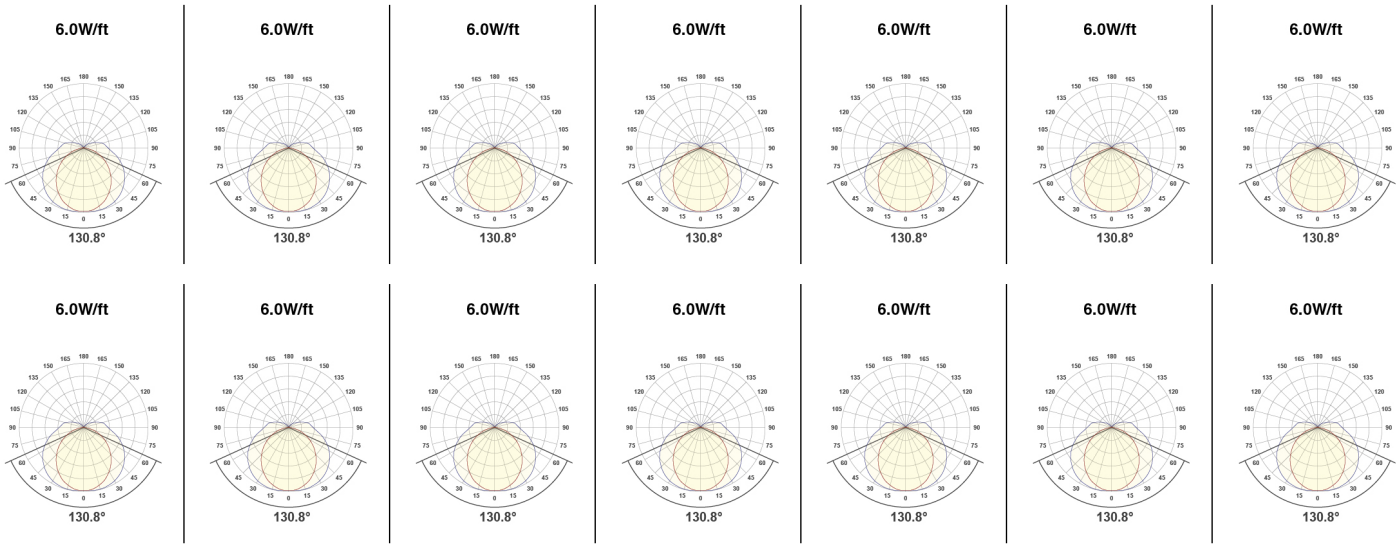

10/11/12 ACCESSORIES - LENS

SP	LI	SO	FR	SB	LV	WI
						
Spread Lens	Linear Lens	Solite Lens	Frosted Lens	Sandblasted Lens	Louver Lens	Wire Holder
To order separately use AY-1-MR16-SP	To order separately use AY-1-MR16-LI	To order separately use AY-1-MR16-SO	To order separately use AY-1-MR16-FR	To order separately use AY-1-MR16-SB	To order separately use AY-1-MR16-LV	To order separately use AY-1-MR16-WI

13 MATERIAL

Sample Text - Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data. Nominal beam spread shown, beam spread varies based on light engine.

- Aluminum
- Brass

14 FINISH

Sample Text - Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data. Nominal beam spread shown, beam spread varies based on light engine.

- BK - Black
- BKT - Black Texture
- BZ - Bronze
- BZT - Bronze Texture
- WT - White
- SL - Silver
- BG - Beige

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

FLOOD ACCENT END MOUNT (MR16 THREADING)

Flood Accent


MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT



Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

NJ-MEDIUM



J Mounting Bracket

NJ-MEDIUM



J Mounting Bracket

NJ-LARGE




J Mounting Bracket

NU-LARGE



U Mounting Bracket

SD-J-LARGE



J Mounting Bracket

WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

BARREL-EXT



8ft barrel cable extender
DRY ONLY

BARREL FOUR-FER



Splits lead from one to four LED Barrel connector fixtures, DRY/DMP

CON120-EXT



10ft Con cable extender
DRY/DMP/WET

CON FOUR-FER



Splits lead from one to four LED Con connectors DRY/DMP/WET

CON M - BARREL F



Male con to barrel cable adaptor
DRY/DMP

CON M - BARREL F



Male con to barrel cable adaptor
DRY/DMP

CON M - BARREL F



Male con to barrel cable adaptor
DRY/DMP

CON M - BARREL F



Male con to barrel cable adaptor
DRY/DMP

CON M - BARREL F



Male con to barrel cable adaptor
DRY/DMP

COMPATIBLE CONTROLS

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

NFC APP

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26