




LC-TORQ

Field Assembled Extrusion- Surface



FPO



- Ideal for surface mount installations
- Offered in a sleek flat profile with two lens options.
- Ideal for surface mounting in both direct and indirect applications
- Compatible with all LC Strips.

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
LC-TORQ		SST		NI	

Sample Part Number: **LC-TORQ-ST-SST-DF-NI-48"**

1 PRODUCT LC-TORQ	2 FINISH ST BK Satin Black	3 MOUNTING SST Stainless Steel Refer to following pages for mounting clip option details and provided quantities.
4 LENS DF Diffused FR Frosted For representation of LED visibility, see Diode Visibility section on following pages.	5 WIRE INPUT/OUTPUT NI Not Installed	6 EXTRUSION LENGTH (IN) 1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"


Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount | Painted end caps match the extrusion finish and have a white interior. Satin end caps utilize a metallic paint.



LC-TORQ

Field Assembled Extrusion- Surface

1 PRODUCT - DIMENSIONS

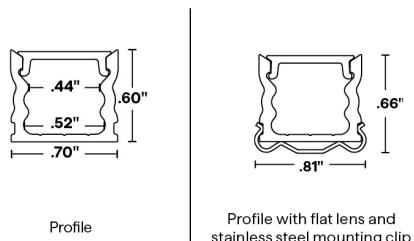

Profile

Profile with flat lens and stainless steel mounting clip


END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps




No feed



Feed

To order separately,
use TORQ-EC


2 FINISH



Satin

Black

3 MOUNTING



Stainless Steel Clip

2 clips provided for 4' or less, 4 clips provided
for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

4 DIODE VISIBILITY



Diffused

Frosted

COMPATIBLE ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	VHB
1.41", .71"	1.46", 1.29"	1.46", 4"	1.46", 1.03", .75"	1.38", 2.23", .75"	Double sided mounting tape

Adjustable mounting bracket - Medium

Adjustable mounting bracket - Large

Adjustable mounting bracket - XLarge

Small mounting accessory

Adjustable mounting accessory