




ESSENTIALS EMBD-FLAT (01)

MITERED STATIC WHITE

24VDC Partially Assembled Recessed
Fixtures - Recessed



410.2 & 410.16
Closet Rated
up to 4.0W/ft



- Recessable fixture offered in a sleek flat profile with four lens options
- Outer trim sits flush to the surface and recesses at either 0.77" or 1.27" depending on mounting selected
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR / WIRE IN	9 CONNECTOR / WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LEFT END ANGLE	15 RIGHT END ANGLE	16 LENGTH (IN)	17 EXACT/ OPTIMAL
EBM1SW				STD												

Sample Part Number: EBM1SW-5.0-30-DRY-STD-DF-**-BW-BW-BK-CL2-SP-ST-LI45-RI45-48"-E

1 PRODUCT EBM1SW See following pages for compatible power supplies.	2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft	3 CCT 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED DRY IP20 WET IP67 DMP IP54	5 EFFICIENCY STD Standard
6 LENS DF Diffused PR Polar FR Frosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	7 WIRE INPUT/OUTPUT ** Shop drawings required ** Shop drawings required	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	
10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black	11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING MG Magnet SP Spring Clip	13 FINISH ST Satin CU Custom	
14 LEFT END ANGLE LI45 Inner 45° LO45 Outer 45° LFT Flat (no angle) See following pages for mitered angle configuration options	15 RIGHT END ANGLE LI45 Inner 45° LO45 Outer 45° LFT Flat (no angle) See following pages for mitered angle configuration options	16 LENGTH (IN) Fixture length min 12", max 98.43" not including end caps. Tolerance +0 - 1/8". Consult factory for lengths under 12".	17 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed


1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens and magnet mounting clip



Profile with flat lens and spring mounting clip



Spring mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with EBM1SW-**-30-DRY-STD

	1.5 W/FT	3.0 W/FT	4.0 W/FT	5.0 W/FT			
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT
FR	124	98	216	98	269	98	327
PR	107	98	186	98	231	98	281
DF	91	98	159	98	198	98	241

6 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens

FR - Frosted lens

TEMPERATURE RATINGS


		1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	120°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F
WET	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F




ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed


WIRING CONFIGURATION OPTIONS




Single End Feed

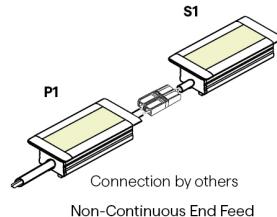

Connection by others
Non-Continuous End Feed

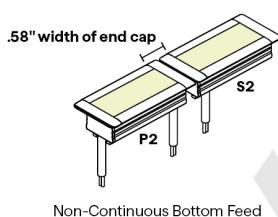


.58" width of end cap
Non-Continuous Bottom Feed

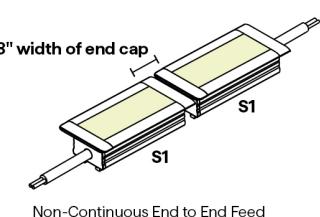


.58" width of end cap
Non-Continuous End to End Feed

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24"
Stranded 22 AWG



Barrel 6" - DRY/DMP1
22 AWG



Barrel 6" - WET | 22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed



White


Black

12 MOUNTING



Magnet Clip

One MG provided per foot
To order separately use
MG-02



Spring Clip

2 clips provided for 4' or less.
4 clips provided for greater than
4'.

To order separately use SP-01




Magnet Mount
Accessory for MG-02

Sold separately, to order use
MMA-02

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface




13 FINISH



Satin

Custom color available

14 / 15 LEFT/RIGHT END ANGLE CONFIGURATION OPTIONS

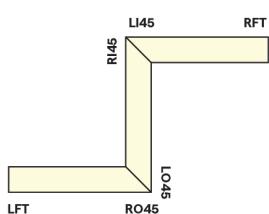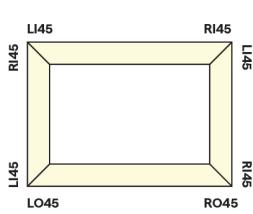




ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

17 EXACT/OPTIMAL FIXTURE LENGTH

Optimal Fixtures

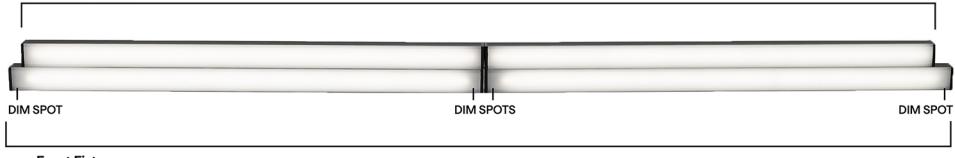

Exact Fixtures

SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	



ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

SW WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.56"		11.71"	
13"	12.56"		12.71"	
14"	13.56"		13.71"	
15"	14.56"		14.71"	
16"	15.56"		15.71"	
17"	16.56"		16.71"	
18"	17.56"		17.71"	
19"	18.56"		18.71"	
20"	19.56"		19.71"	
21"	20.56"		20.71"	
22"	21.56"		21.71"	
23"	22.56"		22.71"	
24"	23.56"		23.71"	
36"	35.56"		35.71"	
48"	47.56"		47.71"	
60"	59.56"		59.71"	
72"	71.56"		71.71"	
84"	83.56"		83.71"	
96"	95.56"		95.71"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $\pm 0 - 5\%$ tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	




ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE WIRING ACCESSORIES

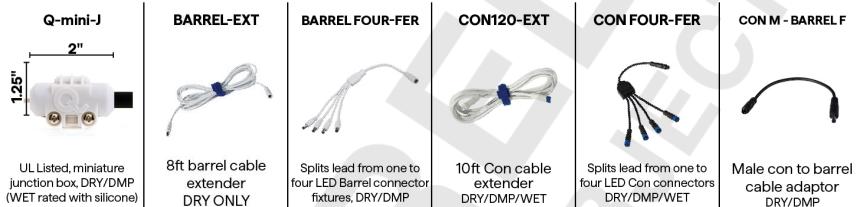

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity



ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage

PRELIMINARY
SUBJECT TO CHANGE