



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed



- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Sleek flat profile and three-sided dropped lens
- 62% smaller than ESSENTIALS-TRE3
- Delivers equivalent efficacy as standard size fixtures
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Mounting options include a mounting clip, magnet option, or TBAR clip, making installation and repositioning effortless
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 2.0 watts or less per foot per NEC regulations
- Consult factory for field assembly options

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS	6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL
ALTA-04-SW													

Sample Part Number: ALTA-04-SW-1.0-30-DRY-FR-S1-BW-CLS-WH-CL2-SST-ST-48"-E

1 PRODUCT ALTA-04-SW See following pages for compatible power supplies.	2 WATTS/FT 1.0 1.0W/ft 2.0 2.0W/ft 4.0 4.0W/ft	3 CCT 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED DRY IP20	5 LENS DF Diffused FR Frosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	
		1.0 1.0W/ft 2.0 2.0W/ft 4.0 4.0W/ft	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	IP54	
6 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	7 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	8 CONNECTOR/WIRE OUT CLS Closed End (No feed)			
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
9 WIRE COLOR WH White BK Black N/A For Barrel	10 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	11 MOUNTING SST Stainless Steel MG Magnet TBC-09 9/16" Flat or Tegular TB-Grid TBC-10 15/16" Flat or Tegular TB-Grid	12 FINISH ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	13 LENGTH (IN) Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	14 EXACT/OPTIMAL E Exact specified length O Optimal illumination Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Title 24 – JA8-2019 Static White Strip: All wattages, CCT and IP




MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with drop lens




Profile with drop lens and
stainless steel mounting clip




Profile with drop lens,
magnet mounting clip



Profile with drop lens,
magnet mount clip, and
magnet mount accessory



Profile with TBC-09



Profile with TBC-10

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]

Tested with ALTA-04-SW-**-30-DRY

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	61	97	124	98	262	98
DF	49	97	97	98	204	98

5 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





MICRO 5 ALTA-DROP (04) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		1.0 W/FT		2.0 W/FT		4.0 W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	**	**	**	**	**	**
	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	140°F	-4°F	120°F
DMP	Ambient Operating Temp - Recessed	**	**	**	**	**	**
	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	135°F	-4°F	115°F

6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)



CONFIGURATION OPTIONS

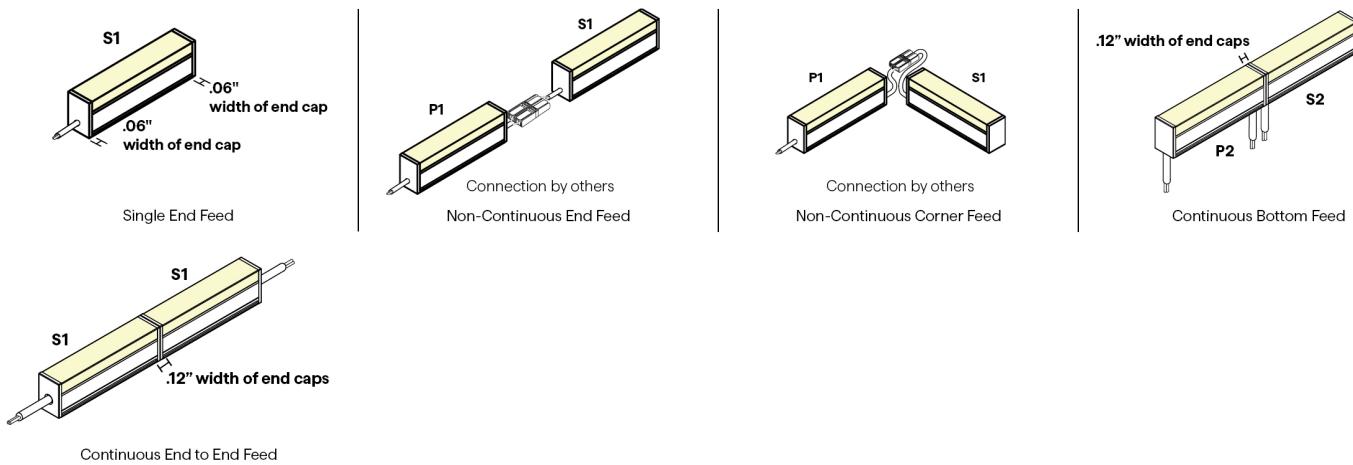




MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

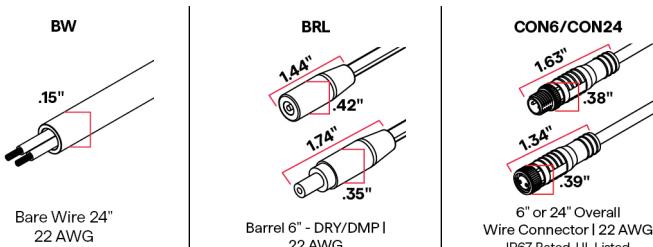

9 WIRE COLOR



11 MOUNTING

SST	MG	MMA-03	TBC-09	TBC-10
1.25" .52" .21"	0.95" .28" .08"	.07" 8" .44"	.64" .50" .27"	1.02" .50" .27"
Stainless Steel Clip	Magnet Clip	Magnet Mount Accessory for MG-03	Plastic T-Bar Clip	Plastic T-Bar Clip
2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'	One MG provided per foot	96" lengths Sold separately, to order use MMA-03	Use on 9/16" Flat or Regular Drop Ceiling	Use on 15/16" Flat or Regular Drop Ceiling
To order separately use SST-08	To order separately use MG-03	Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length
Each clip comes with a #4 x 5/8" Flat Head SS		Required when mounting to a non-magnetic surface	To order separately use TBC-09	To order separately use TBC-10
			Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key


12 FINISH



Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

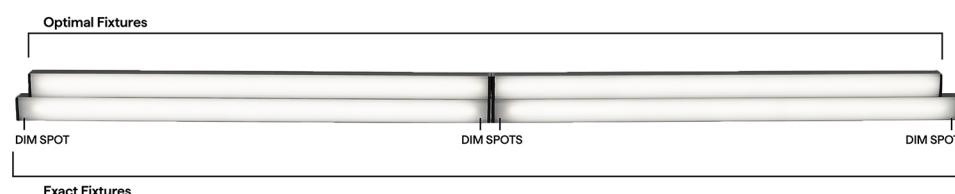



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW DRY DMP LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.38"		11.63"	
13"	12.38"		12.63"	
14"	13.38"		13.63"	
15"	14.38"		14.63"	
16"	15.38"		15.63"	
17"	16.38"		16.63"	
18"	17.38"		17.63"	
19"	18.38"		18.63"	
20"	19.38"		19.63"	
21"	20.38"		20.63"	
22"	21.38"		21.63"	
23"	22.38"		22.63"	
24"	23.38"		23.63"	
36"	35.38"		35.63"	
48"	47.38"		47.63"	
60"	59.38"		59.63"	
72"	71.38"		71.63"	
84"	83.38"		83.63"	
96"	95.38"		95.63"	

14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

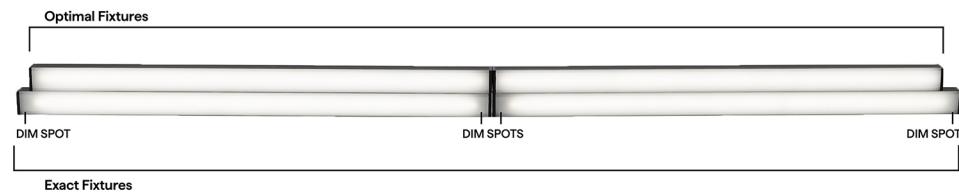



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW DRY DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	End Feed	Bottom Feed	End Feed	Bottom Feed
12"	11.38"		11.63"	
13"	12.38"		12.63"	
14"	13.38"		13.63"	
15"	14.38"		14.63"	
16"	15.38"		15.63"	
17"	16.38"		16.63"	
18"	17.38"		17.63"	
19"	18.38"		18.63"	
20"	19.38"		19.63"	
21"	20.38"		20.63"	
22"	21.38"		21.63"	
23"	22.38"		22.63"	
24"	23.38"		23.63"	
36"	35.38"		35.63"	
48"	47.38"		47.63"	
60"	59.38"		59.63"	
72"	71.38"		71.63"	
84"	83.38"		83.63"	
96"	95.38"		95.63"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	MICRO 5-SW	
Dim to Black		Q6M-DC+CAP QTM-DC+CAP iQ-PH+QDI
0.1%		QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN Q1-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%		QTM-eLED(F) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-S 1.41" x .51"	VHB 	NJ-MICRO 	BL-MICRO 	NL-MICRO 	SD-L-MICRO
Adjustable mounting bracket - Small	Double sided mounting tape	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket	L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J 2" x 1.25" x 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5 2.80" x 2.27" x 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	BARREL-EXT 	BARREL FOUR-FER 	CON120-EXT 	CON FOUR-FER 	CON M - BARREL F
8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP		



MICRO 5 ALTA-DROP (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage