



Q6M-DC+CAP

12V or 24V DC Power Supply -
60W-100W



BUILD AMERICA
BUY AMERICA
COMPLIANT



Declare!



- UL listed rectified power supply for indoor applications
- Converts AC power to DC power
- Includes a robust rectifier and three tap selections for versatility
- Capable of handling up to 60 watts at 12VDC and 96 watts at 24VDC
- Built-in capacitor ensures no ripple or flicker in the output
- Guarantees smooth and stable power supply for LED fixtures
- Ideal for powering and dimming LED fixtures
- Provides reliable and high-quality performance.
- Dimming levels to 0.1% (Dim to Dark)

1 PRODUCT	2 WATTAGE	3 PRIMARY VOLTAGE	4 SECONDARY VOLTAGE	5 NUMBER OF BREAKERS	6 BREAKER AMPERAGE	7 CHOKE	8 COLOR	9 OPTIONS
Q6M						CK-S		

Sample Part Number: Q6M-60DC+CAP-120-24VDC-1-2.5-CK-S-BK-CP

1 PRODUCT Q6M	2 WATTAGE 60DC+CAP 60DC+CAP 100DC+CAP	3 PRIMARY VOLTAGE 120 60Hz 277 60Hz 120 60Hz 277 60Hz	4 SECONDARY VOLTAGE 12VDC 24VDC	5 NUMBER OF BREAKERS 1 2
6 BREAKER AMPERAGE 2.5 4 5	7 CHOKE CK-S	8 COLOR WH BK	9 OPTIONS CP N/A	White (Standard) Black Powder Coat Finish Cord & Plug

COMPATIBLE LEDS

STATIC WHITE

SW24/1.5-4.0 SW-DR24/1.5-4.0 SHLD-SW24/1.5-4.0	✓
SW24/5.0, SW-HE, SW-HE+ SW-DR24/5.0, SW-HE-DR SHLD-SW24/5.0, SHLD-SW-HE	✓
SD-SW24/1.0-4.0	✓
SD-SW24/6.0	✓
SW-IA	
SW-XT	✓

OTHER

DW-HE Tunable Applications	
DW-HE Warm Dim Applications	
WD	
SC	✓
RGB	
RGBW, RGBW-HE	

SHEETS

Q-SHEETS SW	✓
Q-SHEETS DW Tunable Applications	
Q-SHEETS DW Warm Dim Applications	
Q-SHEETS RGB	
Q-SHEETS RGBW	

MICRO 5

MICRO 5-SW	✓
MICRO 5-DW Tunable Applications	
MICRO 5-DW Warm Dim Applications	
MICRO 5-RGB	

PRODUCT INFORMATION

- For indoor use only
- Suitable for damp locations
- Surface mount any position
- Use dimmers rated for magnetic low voltage load with neutral wire


- For supply connections use wires rated for at least 90°C
- Certified to UL 2108
- 10 Year Warranty



Q6M-DC+CAP


12V or 24V DC Power Supply - 60W-100W

1 PRODUCT - DIMENSIONS

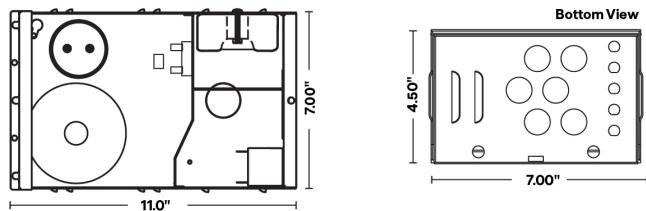

MOUNTING

- 6 plane surface mount
- Rod suspension (Two - 1/4" threaded rods)



2 TECHNICAL INFORMATION

Wattage	Max Load (Watts)	Fixture Load Volts	Max Prim Amps @ 120V	Max Prim Amps @ 277V
60DC+CAP	60W	12VDC	0.90 A	0.40 A
60DC+CAP	60W	24VDC	0.90 A	0.40 A
100DC+CAP	100W	24VDC	1.4 A	0.55 A

Secondary Breaker Amperage

Amps	Max 12V Load	Max 24V Load
2.5	30W	60W
4	48W	96W
5	60W	120W

HOUSING

- 18 gauge welded steel enclosure: 11" L x 7" W x 4.5" D
- Knockouts: 7
- Color: white powder coating (standard)
- (2) 3/8" threaded rods (rods not included)

TOROIDAL TRANSFORMER - DUAL TAP (DT)

- (3) Primary taps: 12VDC, 13VDC, 14VDC or 24VDC, 26VDC, 28VDC
- Loads may be connected to one (1) of the primary taps up to the full watt rating of the PSC
- The advantage is that the PSC can be tapped to recover voltage drop and produce between 85%-100% light output
 - NOTE: See Voltage Drop Calculator at www.qtl.lighting

TOROIDAL CHOKE

- QTL's standard choke, or "debuzzing coil" reduces noise when dimming and helps negate in-rush current that is prevalent with LED loads. It allows for quiet operation and eliminates nuisance tripping. Choke is standard.
- NOTE: Suspension rods are purchased separately and not from QTL, Inc.

SECONDARY CIRCUIT

- Up to two (2) magnetic circuit breaker
- Amps: 2.5A, 4A, 5A
 - NOTE: Breakers are sized to the feed load per N.E.C. Article 411 (not to exceed 25 amps per load). All wiring by the electrical contractor must be Class 1 compliant to N.E.C.



Q6M-DC+CAP

12V or 24V DC Power Supply - 60W-100W

8 COLOR



Black Powder
Coat Finish

White
(Standard)

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature
junction box, DRY/DMP
(WET rated with silicone)