
VOYA STAFF LIGHT 2.5" COB AMBER

12VAC COB Staff Flood/Accent LED

FPO



- Specification-grade, flood/accent lighting with best-in-class lumen output, color quality, dimming performance, and optical control
- Available in ultra-durable powder-coated 6061 aluminum, polished brass, or polished 316L stainless steel
- Amber light meets Florida Wildlife Commission (FWC) standards for coastal lighting to prevent sea turtle hatchling disorientation
- Flexible tree, surface, wall and ground mounting options support diverse installations
- Field-adjustable output set on site via DIP switch
- Wet listed for exterior applications

1 PRODUCT	2 KNUCKLE	3 CRI	4 CCT	5 SNOOT	6 COB	7 BEAM ANGLE	8 MATERIAL	9 FINISH	10 WATTAGE	11 OUTPUT SETTING	12 STEM LENGTH	13 WEEP HOLE	14 ACCESSORY 1	15 ACCESSORY 2	16 ACCESSORY 3
VOYA-SL-2.5-COB-12VAC-A	ST	N/A	A												

Sample Part Number: **VOYA-SL-2.5-COB-12VAC-A-ST-N/A-A-HR-COB-37-A-WH-04-N/A-12-N/A-SP-LV-N/A**

1 PRODUCT

VOYA-SL-2.5-COB-12VAC-A

2 KNUCKLE

ST Standard

3 CRI

N/A

4 CCT

A Amber (>605nm peak)

5 SNOOT

FL Flush
HR 0.5" Regress
1R 1" Regress
30D 30 Degree
45D 45 Degree
60D 60 Degree

GZR Grazer

6 COB

COB All Other

COB All Other

7 BEAM ANGLE

GZR Grazer

8 MATERIAL

A 6061 Aluminum Anodized and Powder Coated

B Brass H59

SS Stainless Steel 316L

9 FINISH

BG Beige
BB Black Bronze
BK Black
BKT Black Texture
BZ Bronze
BZT Bronze Texture
SL Silver
WH White
CU Custom

Lead times differ. BZT parts are readily available. All other standard finishes are painted upon order. Custom finishes: consult factory

P Polished

Brass and Stainless Steel have longer lead times: consult factory

10 WATTAGE

07 6.8 Watts

Refer to delivered lumen output on following pages

7W option includes on board dip switch for field adjustable output with 8 settings

04 4.0 Watts

Refer to delivered lumen output on following pages

11 OUTPUT SETTING

500MA 100% Output
375MA 75% Output
300MA 60% Output
250MA 50% Output
220MA 44% Output
190MA 38% Output
170MA 34% Output
150MA 30% Output

Selection above is factory set. Current settings follow logarithmic reduction in output for linear perception, can be adjusted in the field

N/A Not available for these wattages

12 STEM LENGTH

1 1" Stem Length
2 2" Stem Length
3 3" Stem Length
6 6" Stem Length
9 9" Stem Length
12 12" Stem Length
18 18" Stem Length
24 24" Stem Length
30 30" Stem Length
36 36" Stem Length
42 42" Stem Length
48 48" Stem Length

6"-36" are standard. Other lengths will have longer lead times

13 WEEP HOLE

WPH Weep Hole
N/A No Weep Hole

Not using a weep hole while aiming up will void warranty. FL and GZR snoots do not have weep holes. If FL or GZR is chosen, select N/A

14 ACCESSORY 1

SP Spread Lens
LS Linear Spread Lens
WW Wall Wash Lens
LV Honeycomb Louver
N/A No Accessory

Retaining Ring included with each accessory. Accessories not compatible with GZR options.

15 ACCESSORY 2

SP Spread Lens
LS Linear Spread Lens
WW Wall Wash Lens
LV Honeycomb Louver
N/A No Accessory

Retaining Ring included with each accessory. Accessories not compatible with GZR options.

16 ACCESSORY 3

SP Spread Lens
LS Linear Spread Lens
WW Wall Wash Lens
LV Honeycomb Louver
N/A No Accessory

Retaining Ring included with each accessory. Accessories not compatible with GZR options.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26


VOYA STAFF LIGHT 2.5" COB AMBER

12VAC COB Staff Flood/Accent LED


1 PRODUCT - DIMENSIONS




Flush Snoot (FL)



0.5" Regress Snoot (HR)




1" Regress Snoot (1R)




30 Degree Snoot (30D)




45 Degree Snoot (45D)



60 Degree Snoot (60D)



Grazer Snoot (GZR)
*Only to be used with GZR optics



6"-36" are standard. Other lengths will have longer lead times

6 DELIVERED LUMENS


Tested with VOYA-2.5-COB-12VAC-A-ST-95-30-FL at 7W
Grazer COB and Beam Angle are tested with Grazer Snoot

COB - BEAM ANGLE	LUMENS	LM/W	PEAK INTENSITY (CD)	PEAK WAVELENGTH (NM)
COB - 20°	190	29	1173	611
COB - 26°	201	30	885	611
COB - 40°	193	29	415	611
COB - 55°	178	27	222	611
COB - GZR	163	25	523	612


PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.


20°



26°



40°



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

VOYA STAFF LIGHT 2.5" COB AMBER

12VAC COB Staff Flood/Accent LED

9 FINISH

ALUMINUM POWDER COAT FINISHES

Lead times differ. BZT parts are readily available. All other standard finishes are painted upon order.
Custom finishes: consult factory



BRASS AND STAINLESS STEEL POLISHED FINISHES

Brass and Stainless Steel have longer lead times: consult factory



11 DIP SWITCH SETTINGS

VOYA-2.5-12VAC-COB-A

Output								
Rated Current(A)	150	170	190	220	250	300	375	500
DIP Code	TTT	TT⊥	T⊥T	T⊥⊥	⊥TT	⊥T⊥	⊥⊥T	⊥⊥⊥
Rated Power(W)	2.9	3.1	3.3	3.6	4.1	4.7	5.4	6.8

T On ⊥ Off.

14 / 15 / 16 ACCESSORIES

Holds up to three accessories. Retaining Ring included with each accessory. Accessories not compatible GZR option.

SP



Spread Lens

To order separately use ACC-2.5-SP

LS



Linear Spread Lens

To order separately use ACC-2.5-LS

WW



Wall Wash Lens

To order separately use ACC-2.5-WW

LV




Honeycomb Louver

To order separately use ACC-2.5-LV



Retaining Ring

To order separately use ACC-2.5-RR



SNOOT INSTALL KIT

To order separately use VOYA-SNOOT-INSTALL-KIT

COMPATIBLE GLARE CONTROL ACCESSORIES

VOYA-2.5-45D-GLARE-SHIELD-YY-XX




Adjustable 45° Glare Shield. See Spec Sheet for material (YY) and finish (XX) options

VOYA EM/SM 2.5" MOUNT COMPATIBILITY

Landscape Lighting

SURFACE/WALL


See Surface/Wall installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.





Q-WB

Wood Beam Mount



Q-MT-11*


With Water Protection



Q-MT-17*



Q-MT-18




Q-MT-19

With Water Protection



Q-MT-21




Q-MT-22




Q-MT-37*

SURFACE/WALL J-BOX PLATES

See Surface/Wall J-Box Plate installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.






Q-MT-24

Compatible with 1 GANG RECTANGLE WEATHER PROOF J-BOX or 4/0 WEATHER PROOF J-BOX by others



Q-MT-25



Q-MT-26

Compatible with 1 GANG RECESS J-BOX or 4/0 RECESSED J-BOX by others



Q-MT-27

Compatible with 3/0 RECESSED J-BOX by others




Q-MT-42*

Compatible with 1 GANG RECTANGLE WEATHER PROOF J-BOX or 4/0 WEATHER PROOF J-BOX by others

TREE MOUNT

See Tree Mount installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.





Q-MT-10



Q-MT-12*




Q-MT-14*

With Tree Strap




Q-MT-39*



Q-MT-50 (No Driver)

With Water Protection and Tree Strap





Q-MT-51*

With Water Protection


DIRECT BURIAL

See Direct Burial installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.





Q-MT-6*




Q-MT-7*

With Water Protection




Q-MT-45*



Q-TRIX-R20* (No Driver)

With Water Protection




Q-TRIX-R50* (With Driver)


With Water Protection

MOUNT ACCESSORIES


See Accessories installation for dimensions and included hardware.



NPS ADAPTER




AY-3 Riser Pole



AY-7

No Water Protection



(RA) ROTATIONAL ADAPTER

With Water Protection

***Compatible with AY-3 Riser Pole**

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-11-02-26

VOYA EM/SM 2.5" 12VAC COB AMBER

Power Supply Sizing & Wiring

SIZING RULES

Every VOYA Circuit should be sized to two limitations:
Power Supply - total connected VOYA load must not exceed 70% of supply's rated wattage
Output Breaker - connected load on each breaker must not exceed 70% of the that breaker's rated capacity (breaker amps x 12V)

The supply's 70% limit caps the total load on the transformer; each breaker's 70% limit caps the load on its own circuit. The lower of the two, controls the number of fixtures

- The 70% factor reflects the VOYA-2.5 integrated driver's power factor (~0.7) at 12VAC input. Higher secondary taps (13V / 14V / 15V) are provided to recover voltage drop on longer runs - they do not increase the load a power supply or breaker can carry, so size all capacity at the 12V tap.
- This VOYA specific 70% guideline supersedes the generic "50% derating for LED retrofit loads" note shown on the QTL's power-supply cut sheets. VOYA 2.5 COB fixtures include an integrated driver (hence not a retrofit LED fixture).

POWER SUPPLIES LOADING EXAMPLE

Max VOYA fixtures per sample power supply ratings (70% rated wattage)

Power Supply Rating	Useable Load (70%)	6.8W	4W
60W	42W	6	10
100W	70W	10	17
150W	105W	15	26
300W	210W	30	52

OUTPUT BREAKER LOADING EXAMPLE

Max VOYA fixtures per sample breaker ratings (70% breaker capacity)

Breaker	Rated @ 12V	Useable Load (70%)	6.8W	4W
5 A	60W	42W	6	10
10 A	120W	70W	10	17
12.5 A	150W	105W	15	26
25 A	300W	210W	30	52

DISTRUBUTED & BRANCH CIRCUITS


VOYA 2.5 COB can be wired as either a distributed load - multiple fixtures tapped along a run, in branches, or in loop/ring circuits - or as a single load at the end of a run. When wiring as a distributed load, refer to the VOYA 2.5 12VAC wiring guide to size wires within recommended voltage-drop limits. When wiring as a single load at the end of a run, refer to the QTL voltage drop calculator.


Input voltage at the fixture should be 11.4V–15V AC without dimming. The voltage at the fixture should be 12V–15V AC with dimming. Therefore, taps higher than 12V are recommended when dimming is used.

- Keep every branch and run within both 70% limits and the 12–15V AC fixture voltage window.
- Use the multi-tap secondary (12V / 13V / 14V / 15V) to recover voltage drop on longer runs - tap up to compensate.


DIMMING

VOYA 2.5 COB Amber dims by phase control on the 120VAC primary of the magnetic power supply. The curves below show measured output as a common-neutral MLV dimmer reduces the RMS voltage to the supply, at four factory drive-current settings. VOYA 2.5 12VAC COB dims as low as 4% of full output.

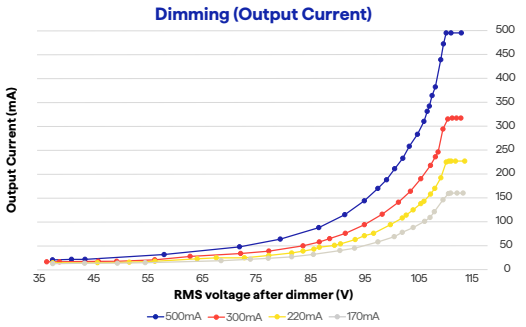

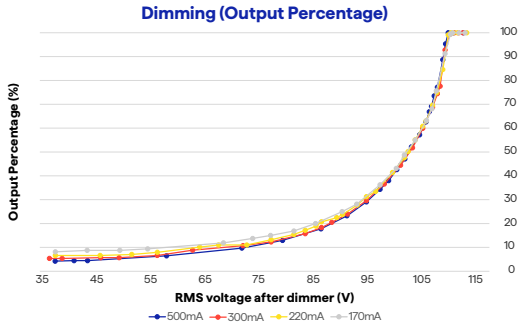

Recommended dimmer: Use a magnetic low-voltage (MLV) dimmer with a common (shared) neutral, installed on the line side - upstream of the magnetic power supply. The dimmer phase-cuts the 120VAC primary; the 12VAC secondary is never dimmed directly

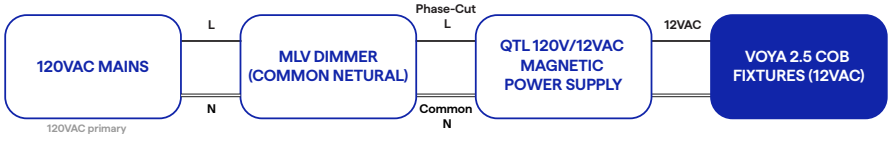

MLV Dimmer on the line side - upstream of power supply. 12VAC secondary is never dimmed

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-08-18-26