




# ESSENTIALS LALO- ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed



Declare

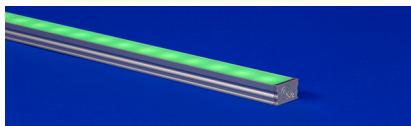

- Shallow, low-profile fixture for surface or recessed installations
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Three mounting options
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2' cut point
- Optional plastic louver accessory available in white or black for added glare control

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
LL3RGB	6.0	RGB	ENC	STD	

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/OUTPUT	8 CONNECTOR / WIRE IN	9 CONNECTOR / WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/ OPTIMAL

Sample Part Number: LL3RGB-6.0-RGB-ENC-STD-TL-P1-BW-BW-STD-STD-BK-CL2-SST-ST-48"-E

<b>1</b> <b>PRODUCT</b> LL3RGB  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> 6.0 6.0W/ft	<b>3</b> <b>CCT</b> RGB	<b>4</b> <b>RATED</b> ENC IP67	<b>5</b> <b>EFFICIENCY</b> STD Standard	<b>6</b> <b>LENS</b> CL Clear TL Translucent  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  SINGLE (Input only) S1 End Feed S2 Bottom Feed  For continuous mounting, consider bottom feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)			
<b>10</b> <b>INPUT END CAP</b>  STD Standard CL Clear  STD - End cap matches fixture finish chosen  Select CL for continuous runs	<b>11</b> <b>OUTPUT END CAP</b>  STD Standard CL Clear  STD - End cap matches fixture finish chosen  Select CL for continuous runs				
<b>12</b> <b>WIRE COLOR</b> WH White BK Black	<b>13</b> <b>WIRE TYPE</b> CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)				
<b>14</b> <b>MOUNTING</b> SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>15</b> <b>FINISH</b> ST Satin BK Black CU Custom	<b>16</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>17</b> <b>EXACT/OPTIMAL</b> O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		


5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | IK10 rated



# ESSENTIALS LALO-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

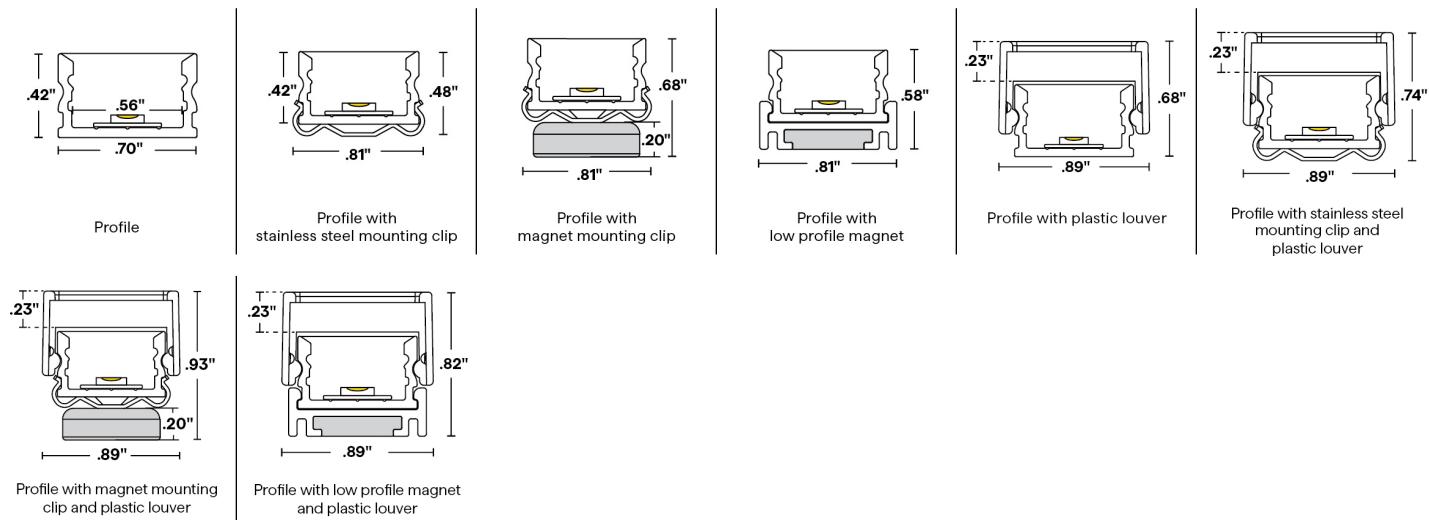

## 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with LL3RGB-6.0-RGB-ENC-STD

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	59	633	119	523	34	469	191
TL	34	633	68	523	19	469	109

## 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

## TEMPERATURE RATINGS

	6.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-13°F	95°F




# ESSENTIALS LALO-ENCAPSULATED (03) RGB


## 24VDC Linear Fixtures - Surface & Recessed

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

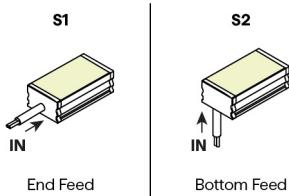

PASS THROUGH (Input/Output)

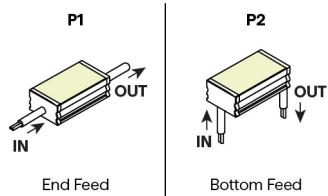


### CONFIGURATION OPTIONS

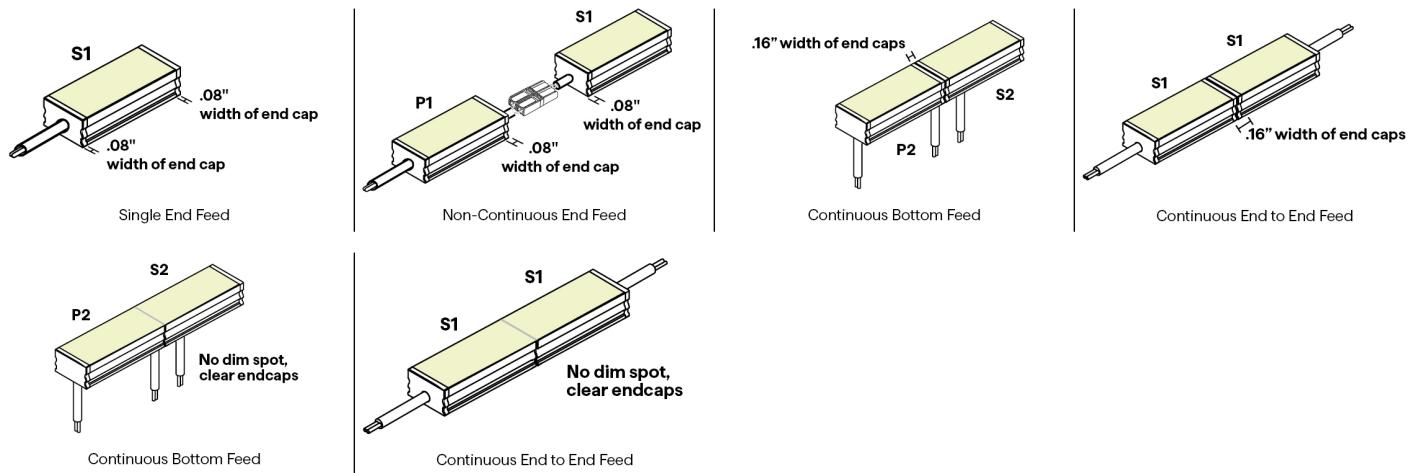


### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

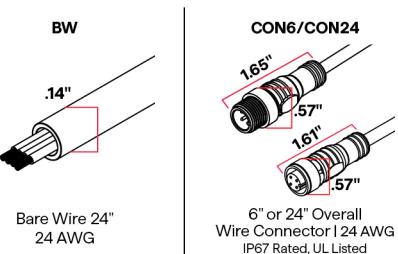

### 10 / 11 END CAP – IN/OUT

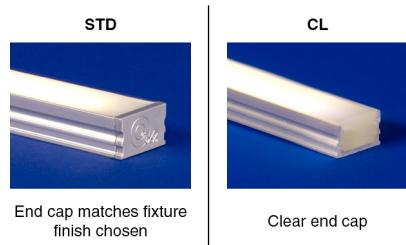





# ESSENTIALS LALO-ENCAPSULATED (03) RGB

## 24VDC Linear Fixtures - Surface & Recessed

### EXTERNAL LOUVER ACCESSORY

#### PLASTIC

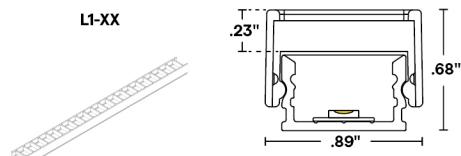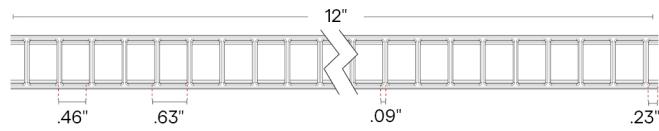

Lumen Multiplier  
WH BK




0.71 0.48

Profile with plastic louver  
To order separately use  
LALO-L1-FLAT-KIT-WH or  
LALO-L1-FLAT-KIT-BK

### 12 WIRE COLOR



White  
Black




Stainless Steel Clip

2 clips provided for 4' or less; 4  
clips provided for greater than  
4'

To order separately use SST-01

Each clip comes with a #4 x  
5/8" Flat Head screw


### 14 MOUNTING



Low Profile Magnet

One M4 provided per foot.


To order separately use  
MG-04



Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04  
Each bracket comes with 2 #6  
x 5/8" Flat Head SS

Required when mounting to a  
non-magnetic surface



Magnet Clip

One MG provided per foot

To order separately use MG-01

### 15 FINISH



Satin

Black

Custom color  
available

#### MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6  
x 5/8" Flat Head SS

Required when mounting to a  
non-magnetic surface



# ESSENTIALS LALO-ENCAPSULATED (03) RGB


## 24VDC Linear Fixtures - Surface & Recessed

### 17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)
[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

#### Optimal Fixtures

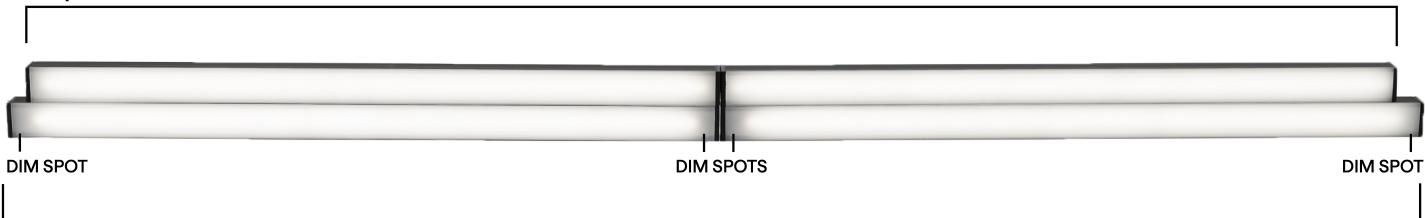

#### Exact Fixtures

### RGB ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $+/- 5\%$  tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	




# ESSENTIALS LALO-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGB App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

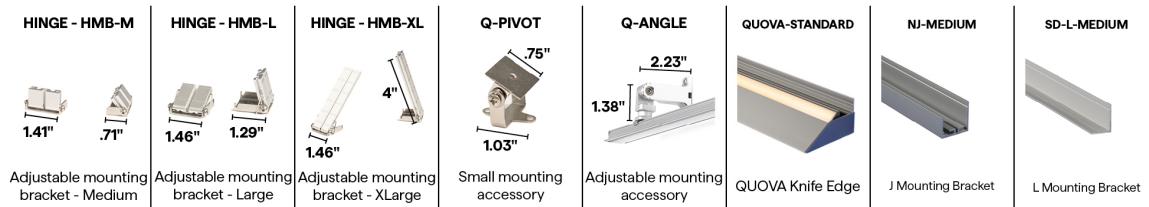

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write DMX addresses and adjust voltage