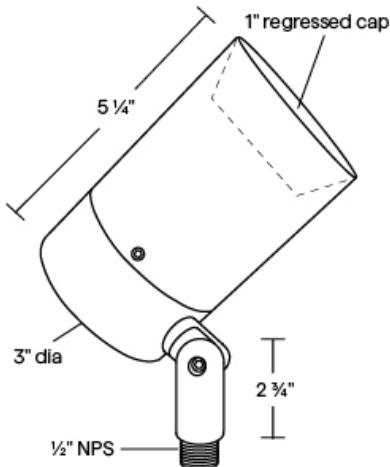


**AL-19**

12V MR16 Flood/Accent Light

10 YEAR
WARRANTY
ALUMINUMMADE IN AMERICA
FROM DOMESTIC &
FOREIGN PARTSUL
1838 LISTEDAL-19 Shown in Bronze Powder Coat Finish (BZ)
Knuckle: Tapered & Positive LockingWeight: 2.1 lbs
Dimensions: 3" dia. x 7" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- Side mount knuckle design.
- 2ft, 18/2 LV wire leads.
- 1" regressed lens cap holds 3 lens accessories.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 75 watt, 9 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

1 PRODUCT	2 MATERIAL	3 FINISH
AL-19	A	

Sample Part Number: **AL-19-A-BZT**

1 PRODUCT	2 MATERIAL	3 FINISH
AL-19	A 6061 - T6 Aluminum	<p>AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture CA Clear Anodized SL Silver WH White</p>


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



AL-19

12V MR16 Flood/Accent Light

1 PRODUCT - DIMENSIONS

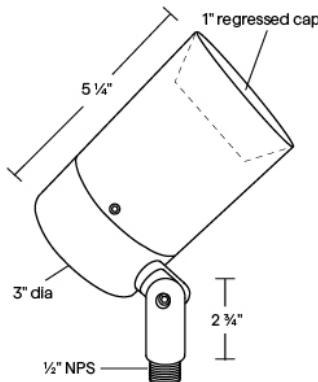

2 MATERIAL



6061 - T6 Aluminum


3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available




ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.



Blue Glass Filter

To order separately
use AY-2-MR16-BL




Light Blue Glass Filter

To order separately
use AY-2-MR16-LB




Pink Glass Filter

To order separately
use AY-2-MR16-PK




Amber Glass Filter

To order separately
use AY-2-MR16-AM




Mercury Vapor Glass Filter

To order separately
use AY-2-MR16-MV




Red Glass Filter

To order separately
use AY-2-MR16-RD



Green Glass Filter

To order separately
use AY-2-MR16-GR



Dichroic Amber Glass Filter

To order separately
use AY-2-MR16-DA



AL-19

12V MR16 Flood/Accent Light

ACCESSORIES - LENS

Holds up to three accessories



ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 75 Watt, 9 Watt LED



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS