



# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed



Declare.



- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Sleek flat profile and three-sided dropped lens
- 55% smaller than ESSENTIALS-TALO
- Delivers equivalent efficacy as standard size fixtures
- Choose from diffused or frosted lens options for varying diode visibility and beam angles
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Mounting options include a mounting clip, magnet option, or TBAR clip, making installation and repositioning effortless
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled
- Consult factory for field assembly options

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS	6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL
ALTA-04-DW	2.0		DRY										

Sample Part Number: ALTA-04-DW-2.0-20/27-DRY-FR-S1-BW-CLS-WH-CL2-SST-ST-48"-E

<b>1</b> <b>PRODUCT</b>  ALTA-04-DW  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  2.0 2.0W/ft  For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>3</b> <b>CCT</b>  20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K  For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>4</b> <b>RATED</b>  DRY IP20  For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>5</b> <b>LENS</b>  DF Diffused FR Frosted  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>6</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed  For continuous mounting, consider bottom feed. When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>7</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>8</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		
<b>9</b> <b>WIRE COLOR</b>  WH White BK Black	<b>10</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>11</b> <b>MOUNTING</b>  SST Stainless Steel MG Magnet TBC-09 9/16" Flat or Tegular TB-Grid TBC-10 15/16" Flat or Tegular TB-Grid	<b>12</b> <b>FINISH</b>  ST Satin BK Black CU Custom	<b>13</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".
				<b>14</b> <b>EXACT/OPTIMAL</b>  E Exact specified length O Optimal illumination  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile with drop lens




Profile with drop lens and stainless steel mounting clip




Profile with drop lens and magnet mounting clip



Profile with drop lens, magnet mount clip, and magnet mount accessory



Profile with TBC-09



Profile with TBC-10

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]

Tested with ALTA-04-DW-2.0-\*\*-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI								
FR	100	94	117	98	120	98	128	97	135	97
DF	79	94	92	98	95	98	102	97	107	97

## 5 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

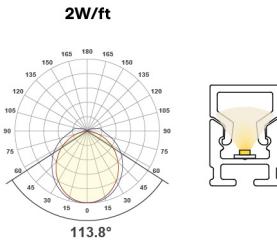

DF lens at 3000K

## TEMPERATURE RATINGS

		DW 2.0 W/FT			
		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	**	**	**	**
	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	120°F




## MICRO 5 ALTA-DROP (04) FOR WARM DIM


24VDC Linear Fixtures - Surface & Recessed

### 6 WIRE INPUT/OUTPUT


SINGLE (Input only)

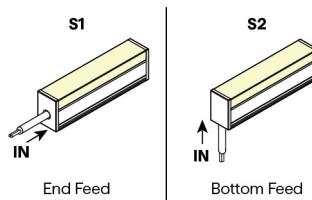


PASS THROUGH (Input/Output)

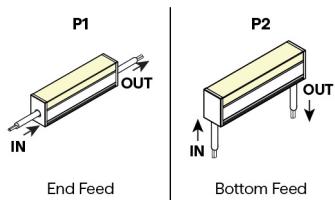


### CONFIGURATION OPTIONS

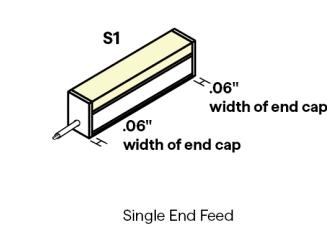


Single End Feed

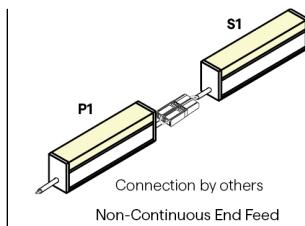


Connection by others  
Non-Continuous End Feed



Connection by others  
Non-Continuous Corner Feed

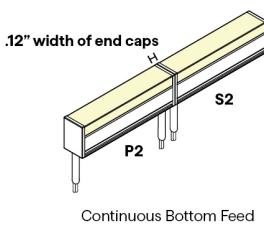


Continuous Bottom Feed

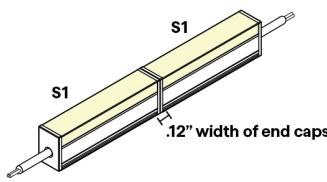

Continuous End to End Feed

### 7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24"  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

### 9 WIRE COLOR



White






Black



## MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

### 11 MOUNTING

SST	MG	MMA-03	TBC-09	TBC-10
 Stainless Steel Clip 1.25" x .52" x .21" 2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4' To order separately use SST-08 Each clip comes with a #4 x 5/8" Flat Head SS	 Magnet Clip 0.95" x 0.28" x 0.08" One MG provided per foot To order separately use MG-03	 Magnet Mount Accessory for MG-03 .07" x 8" x .44" 96" lengths   Sold separately, to order use MMA-03 Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot Required when mounting to a non-magnetic surface	 Plastic T-Bar Clip .64" x .50" x .27" Use on 9/16" Flat or Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-09 Each pair of clips comes with M2.5 x 4mm set screw and Allen key	 Plastic T-Bar Clip 1.02" x .50" x .27" Use on 15/16" Flat or Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-10 Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### 12 FINISH




Satin  
Black

Custom color available

### 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

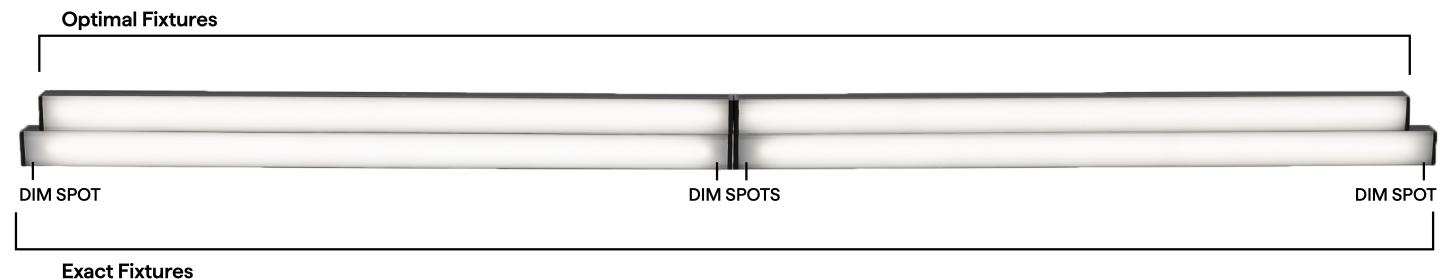



# MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

## DW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	End Feed	Bottom Feed	End Feed	Bottom Feed
12"		10.38"		10.63"
13"		12.38"		12.63"
14"		12.38"		12.63"
15"		14.38"		14.63"
16"		14.38"		14.63"
17"		16.38"		16.63"
18"		16.38"		16.63"
19"		18.38"		18.63"
20"		18.38"		18.63"
21"		20.38"		20.63"
22"		20.38"		20.63"
23"		22.38"		22.63"
24"		22.38"		22.63"
36"		34.38"		34.63"
48"		46.38"		46.63"
60"		58.38"		58.63"
72"		70.38"		70.63"
84"		82.38"		82.63"
96"		94.38"		94.63"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	MICRO 5-DW Warm Dim Applications	
0.1%		QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW
1%		QZ-DALI-DT8
10%		Non-Dim Power Supply with WD App Dongle



# MICRO 5 ALTA-DROP (04) FOR WARM DIM


24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle

## COMPATIBLE MOUNTING ACCESSORIES



## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature  
junction box, DRY/DMP  
(WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES



Wi-Fi or Bluetooth  
Connectivity



## MICRO 5 ALTA-DROP (04) FOR WARM DIM

24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage