




DL-2
12V MR11 20W, 3W LED Recessed Down
Light

10 YEAR
WARRANTY
ALUMINUM

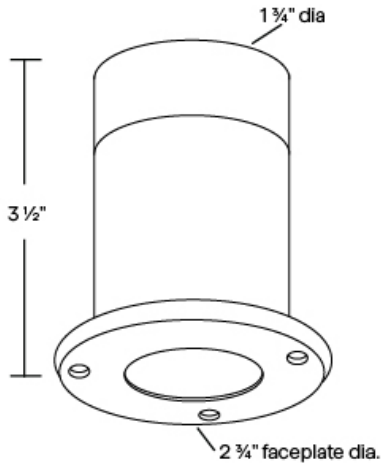

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 12" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment
- Maximum Wattage: 20 watt, 3 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for downlighting applications.

DL-2 Shown in Black Texture Finish (BKT)
Knuckle: Tapered & Positive Locking

Weight: .6 lbs
Dimensions: 2 3/4" dia. faceplate x 1 3/4" dia. body x
3 1/2" overall length

1	2	3
PRODUCT	MATERIAL	FINISH
DL-2	A	

Sample Part Number: DL-2-A-BK

1	2	3
PRODUCT	MATERIAL	FINISH
DL-2	A 6061 - T6 Aluminum	<div><div>AC</div><div>BG</div><div>BK</div><div>BKT</div><div>BZ</div><div>BZT</div><div>CA</div><div>SL</div><div>WH</div></div> <div><div>Aged Copper</div><div>Beige</div><div>Black</div><div>Black Texture</div><div>Bronze</div><div>Bronze Texture</div><div>Clear Anodized</div><div>Silver</div><div>White</div></div>

10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




DL-2

12V MR11 20W, 3W LED Recessed Down Light


1

PRODUCT - DIMENSIONS



2

MATERIAL



3

FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



ACCESSORIES - COLOR FILTERS

Holds One accessory. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR11-BL	To order separately use AY-2-MR11-LB	To order separately use AY-2-MR11-PK	To order separately use AY-2-MR11-AM	To order separately use AY-2-MR11-MV	To order separately use AY-2-MR11-RD	To order separately use AY-2-MR-11GR	To order separately use AY-2-MR11-DA









DL-2

12V MR11 20W, 3W LED Recessed Down Light

ACCESSORIES - LENS

Holds one accessories

<div>SP</div> <div></div> <div>Spread Lens</div> <div>To order separately use AY-1-MR11-1</div>	<div>LI</div> <div></div> <div>Linear Lens</div> <div>To order separately use AY-1-MR11-2</div>	<div>SO</div> <div></div> <div>Softening Lens</div> <div>To order separately use AY-1-MR11-3</div>	<div>LV</div> <div></div> <div>Louver Lens</div> <div>To order separately use AY-1-MR11-4</div>	<div>WI</div> <div></div> <div>Wire Holder</div> <div>To order separately use AY-1-MR11-5</div>	<div>FR</div> <div></div> <div>Frosted Lens</div> <div>To order separately use AY-1-MR11-6</div>
--	--	---	--	--	---

LAMPS

MR11 Halogen or LED; GY-6.35 Bi-Pin Porcelain
Maximum wattage: 20 Watt, 3 Watt LED

<div>MR8</div> <div></div> <div>ELI</div>	<div>MR8</div> <div></div> <div>EMERY ALLEN</div>	<div>MR11</div> <div></div> <div>ELI</div>	<div>MR11</div> <div></div> <div>BRILLIANCE</div>	<div>MR11</div> <div></div> <div>EMERY ALLEN</div>
--	--	---	--	---

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS