





# VERS-INSERT (08) FOR TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed



- A VERSatile fixture with customizable options to meet the specific needs of various applications
- The batwing and prismatic lens options offer glare-reducing illumination
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control



### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-08-DW-2.5HE-20/30-DRY-GC-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**

<div>1</div> <div>PRODUCT</div> <div><div>VERS-08-DW</div><div>VERS-08-DW-USA</div><div>Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.</div><div>LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.</div></div>	<div>2</div> <div>WATTS/FT</div> <div><div><div>1.5HE</div><div>1.5W/ft HE</div></div><div><div>2.5HE</div><div>2.5W/ft HE</div></div><div><div>4.0HE</div><div>4.0W/ft HE</div></div><div><div>1.5HE</div><div>1.5W/ft HE</div></div><div><div>2.5HE</div><div>2.5W/ft HE</div></div><div><div>1.5HE</div><div>1.5W/ft HE</div></div><div><div>2.5HE</div><div>2.5W/ft HE</div></div></div>	<div>3</div> <div>CCT</div> <div><div><div>20/27</div><div>2000K/2700K</div></div><div><div>20/30</div><div>2000K/3000K</div></div><div><div>27/40</div><div>2700K/4000K</div></div><div><div>27/55</div><div>2700K/5500K</div></div><div><div>24/30</div><div>2400K/3000K</div></div><div><div>27/40</div><div>2700K/4000K</div></div><div><div>20/27</div><div>2000K/2700K</div></div><div><div>20/30</div><div>2000K/3000K</div></div><div><div>27/40</div><div>2700K/4000K</div></div><div><div>27/55</div><div>2700K/5500K</div></div></div>	<div>4</div> <div>RATED</div> <div><div><div>DRY</div><div>IP20</div></div><div><div>DMP</div><div>IP54</div></div><div><div>WET</div><div>IP67</div></div></div>	<div>5</div> <div>LENS</div> <div><div><div>BAT</div><div>Batwing</div></div><div><div>GC</div><div>Glare Control</div></div><div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div></div>	<div>6</div> <div>EXTERNAL LOUVER</div> <div><div><div>L1-WH</div><div>White Plastic</div></div><div><div>L1-BK</div><div>Black Plastic</div></div><div><div>L2-ST</div><div>Satin Anodized Aluminum</div></div><div><div>L2-BK</div><div>Black Anodized Aluminum</div></div><div><div>L2-WH</div><div>White Powder Coated Aluminum</div></div><div><div>N/A</div><div>No Louver</div></div><div>Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.</div></div>			
<div>7</div> <div>WIRE INPUT/OUTPUT</div> <div><div><div>SINGLE (Input only)</div><div><div>S1</div><div>End Feed</div></div><div><div>S2</div><div>Bottom Feed</div></div><div><div>S3</div><div>Left Side Feed</div></div><div><div>S4</div><div>Right Side Feed</div></div><div>When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.</div></div><div><div><div>PASS THROUGH (Input/output)</div><div><div>P1</div><div>End Feed</div></div><div><div>P2</div><div>Bottom Feed</div></div><div><div>P3</div><div>Left Side Feed</div></div><div><div>P4</div><div>Right Side Feed</div></div><div>When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.</div></div></div></div>	<div>8</div> <div>CONNECTOR/WIRE IN</div> <div><div><div>BW</div><div>Bare Wire (Standard 36")</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div><div>BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div><div><div>BW</div><div>Bare Wire (Standard 36")</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div><div>BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div>	<div>9</div> <div>CONNECTOR/WIRE OUT</div> <div><div><div>CLS</div><div>Closed End (No feed)</div></div><div><div>BW</div><div>Bare Wire (Standard 36")</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div><div>BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div>	<div>10</div> <div>WIRE COLOR</div> <div><div><div>WH</div><div>White</div></div><div><div>BK</div><div>Black</div></div></div>	<div>11</div> <div>WIRE TYPE</div> <div><div><div>CL2</div><div>Class 2</div></div><div><div>CL2P</div><div>Plenum Rated</div></div><div>CL2P only available with bare wire leads (BW)</div></div>	<div>12</div> <div>MOUNTING</div> <div><div><div>CC</div><div>Concealed Clip</div></div><div><div>MG</div><div>Magnet</div></div><div><div>TBC-03</div><div>9/16" Flat TB-Grid</div></div><div><div>TBC-04</div><div>15/16" Flat or Tegular TB-Grid</div></div><div><div>TBC-05</div><div>9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver</div></div><div><div>TBC-06</div><div>9/16" Tegular TB-Grid, with External Louver</div></div><div><div>TBC-07</div><div>15/16" Flat TB-Grid, with External Louver</div></div><div><div>TBC-08</div><div>15/16" Tegular TB-Grid, with External Louver</div></div></div>	<div>13</div> <div>FINISH</div> <div><div><div>ST</div><div>Satin</div></div><div><div>BK</div><div>Black</div></div><div><div>BZ</div><div>Bronze</div></div><div><div>WH</div><div>White</div></div><div><div>CU</div><div>Custom</div></div><div>White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.</div></div>	<div>14</div> <div>LENGTH (IN)</div> <div><div>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".</div></div>	<div>15</div> <div>EXACT/OPTIMAL</div> <div><div><div>O</div><div>Optimal Illumination</div></div><div><div>E</div><div>Exact Specified Length</div></div><div>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.</div></div>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# VERS-INSERT (08) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

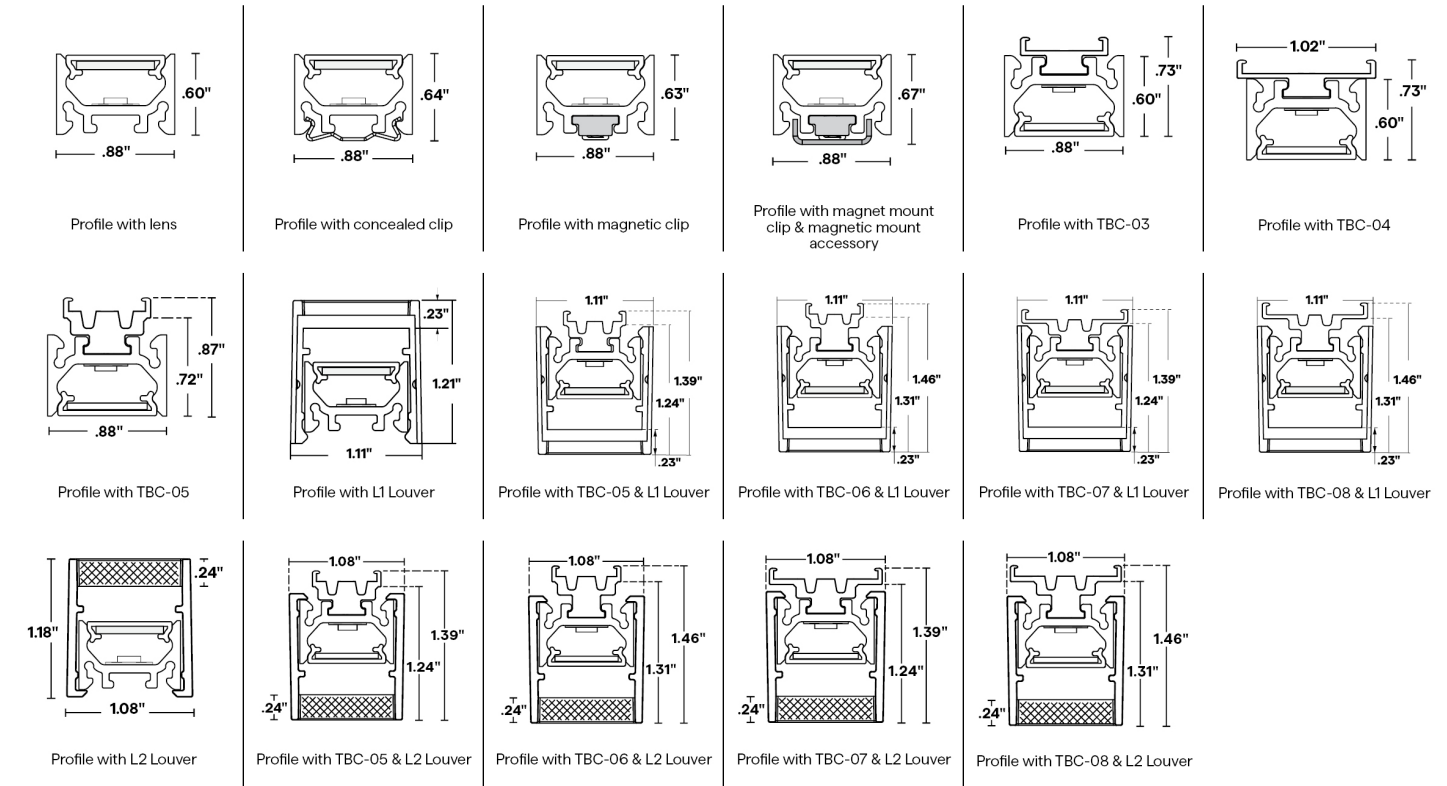

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with VERS-08-DW-\*\*-\*\*\*-DRY

	1.5HE W/FT			2.5HE W/FT			4.0HE W/FT		
	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR
BAT	129	98	N/A	203	98	N/A	302	98	N/A
GC	136	98	≤ 18.1	215	98	≤ 19.6	341	98	≤ 21.2

## 5 DIODE VISIBILITY




BAT - Batwing lens

GC - Glare Control lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

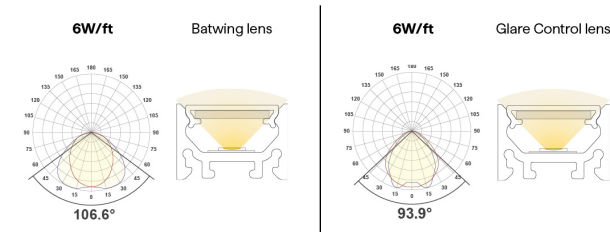



# VERS-INSERT (08) FOR TUNABLE APPLICATIONS


## 24VDC Linear Fixtures - Surface & Recessed

### TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—
WET	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—

### 6 EXTERNAL LOUVER

PLASTIC

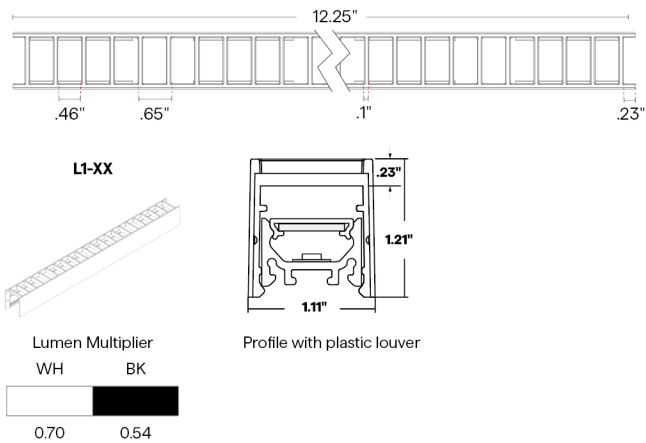


METAL

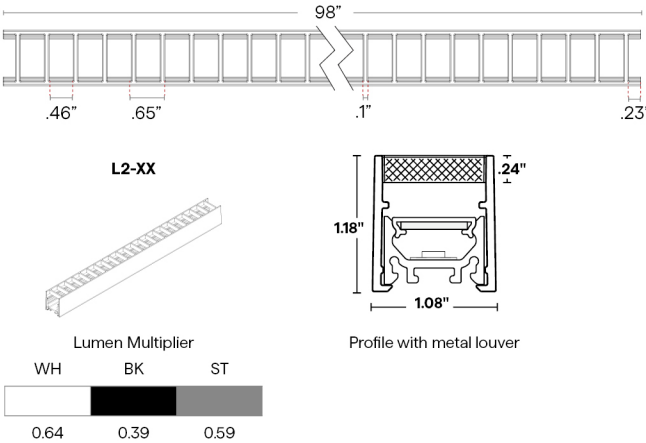


### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)

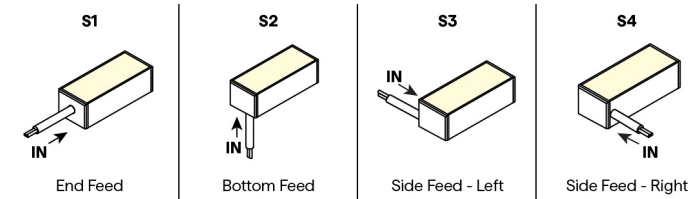

PASS THROUGH (Input/Output)

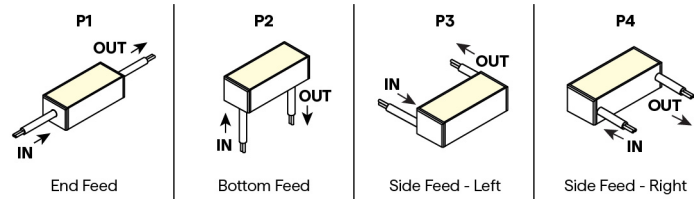



# VERS-INSERT (08) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## CONFIGURATION OPTIONS



## 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

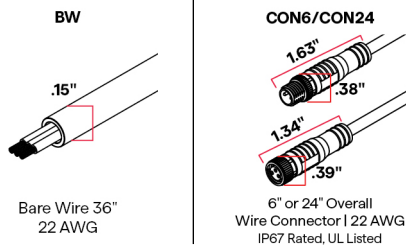

## 10 WIRE COLOR



## 12 MOUNTING

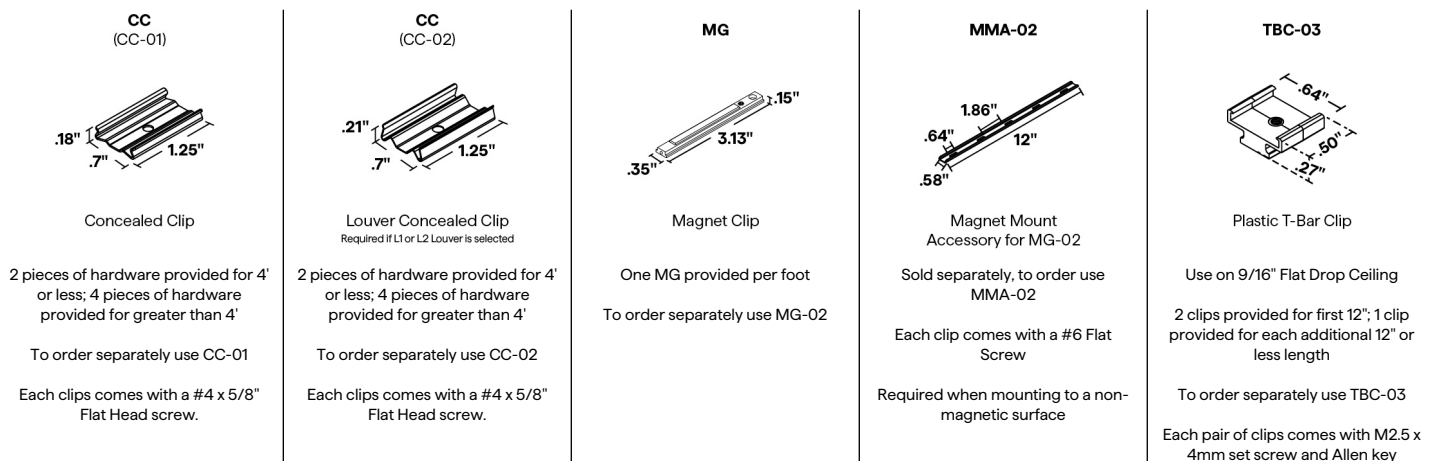




# VERS-INSERT (08) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## MOUNTING CONTINUED

<p><b>TBC-04</b></p> <p>Plastic T-Bar Clip</p> <p>Use on 15/16" Flat or Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p><b>TBC-05</b></p> <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p><b>TBC-06</b></p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p><b>TBC-07</b></p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p><b>TBC-08</b></p> <p>Plastic T-Bar Clip</p> <p>Use with Louver on 15/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>
--	---	---	---	--

## 13 FINISH



Custom finishes require a longer lead time, consult factory

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





# VERS-INSERT (08) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"								
13"								
14"								
15"								
16"								
17"								
18"								
19"								
20"								
21"								
22"								
23"								
24"								
36"								
48"								
60"								
72"								
84"								
96"								

## DW-HE WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"								
13"								
14"								
15"								
16"								
17"								
18"								
19"								
20"								
21"								
22"								
23"								
24"								
36"								
48"								
60"								
72"								
84"								
96"								



# VERS-INSERT (08) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	













DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	



# VERS-INSERT (08) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>NJ-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket	<b>NL-LARGE</b>  L Mounting Bracket
<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-02</b>  1.86" 12" .64" .58" Magnet Mount Accessory for MG-02								

## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J5**



2.80"  
2.27"

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**



1.36"  
2.58"

Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

**NFC APP**



Q-NFC

Read and write DMX addresses and adjust voltage