

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed





- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Asymmetric fixture with an 80° focused beam 20° off-nadir
- Once installed, its wings are covered with tape and compound to create a seamless look
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

Specify either factory assembled fixtures or field assembled extrusions and LEDs.

A LEDs will be installed into a complete fixture. Ideal for single fixtures. Avoids installers needing to handle the delicate 5mm LED.

OR

B Extrusions and LEDs will be shipped not installed. Ideal for long runs or light with no interruptions in LED up to Class 2 limitations. Due to the delicate nature of the 5mm LED, care must be taken in the installation process

A. Factory Assembled Option

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5
PRODUCT	WATTS/ FT	CCT	RATED	LENS
	2.0			

ADDITIONAL INFORMATION REQUIRED TO ORDER

A6	A7	A8	A9	A10	A11	A12	A13	A14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **POP-MD-01-DW-2.0-2.0/30-DRY-DF-S1A-BW-CLS-WH-CL2-SP-ST-48"-E**

A1 PRODUCT

POP-MD-01-DW
POP-MD-01-DW-USA

Select USA option for BAA and BABA projects. Only DRY ratings apply. DMP options will require custom modifications, contact factory.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

A2 WATTS/FT

2.0	2.0W/ft

A3 CCT

18/30	1800K/3000K
18/35	1800K/3500K
20/27	2000K/2700K
20/30	2000K/3000K
24/40	2400K/4000K
27/40	2700K/4000K
27/55	2700K/5500K

A4 RATED

DRY	IP20
DMP	IP54

A5 LENS

DF	Diffused
PR	Polar

For representation of LED visibility, see Diode Visibility section on following pages.For beam angles, see Photometric Performance section on following pages

A6 WIRE INPUT/ OUTPUT

SINGLE (Input only)

S1A	End Feed
S1B	End Feed
S2A	Bottom Feed
S2B	Bottom Feed

For continuous mounting, consider bottom feed.

PASS THROUGH (Input/output)

P1A	End Feed
P1B	End Feed
P2A	Bottom Feed
P2B	Bottom Feed

For continuous mounting, consider bottom feed.

A7 CONNECTOR/ WIRE IN

BW Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A8 CONNECTOR/ WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9 WIRE COLOR

WH	White
BK	Black

A10 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)

A11 MOUNTING

SC	Screw
SP	Spring Clip

For either mounting option POP-MD-MNT-KIT is required for mounting POP into the Mud-In Channel

A12 FINISH

ST	Satin
BK	Black
BZ	Bronze
WH	White
CU	Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

A13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

A14 EXACT/ OPTIMAL

E	Exact specified length
O	Optimal illumination

Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-09-04-26

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

B. Field Assembled Option

EXTRUSION ORDERING					
B1	B2	B3	B4	B5	B6
PRODUCT	FINISH	MOUNTING	LENS	WIRE INPUT/ OUTPUT	EXTRUSION LENGTH (IN)
POP-MD-01					

LED STRIP ORDERING							
B7	B8	B9	B10	B11	B12	B13	B14
V/ WATTS	RATED	CCT - LUMENS/ CRI	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
DW24-5MM/2.0			BW	CLS		CL2	

EXTRUSION ORDERING

Sample Part Number: **POP-MD-01-ST-SP-DF-NI-98.43"**

B1 PRODUCT

POP-MD-01

B2 FINISH

ST Satin
BK Black
BZ Bronze
WH White
CU Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

B3 MOUNTING

SC Screw
SP Spring Clip

For either mounting option POP-MD-MNT-KIT is required for mounting POP into the Mud-In Channel

B4 LENS

DF Diffused
PR Polar

For representation of LED visibility, see Diode Visibility section on following pages.For beam angles, see Photometric Performance section on following pages

B5 WIRE INPUT/OUTPUT

B6 EXTRUSION LENGTH (IN)

1" increments from 1" - 98.43"
Tolerance +0.0"/-0.5"

LED STRIP ORDERING

Sample Part Number: **DW24-5MM/2.0-DRY-20/27-BW-CLS-WH-CL2-48"**

B7 V/WATTS

DW24-5MM/2.0

Wattage: 2.0W/ft
Voltage: 24VDC
See following pages for compatible power supplies.

B8 RATED

DRY IP20
DMP IP54

B9 CCT - LUMENS/CRI

18/30 1800K/3000K
18/35 1800K/3500K
20/27 2000K/2700K
20/30 2000K/3000K
24/40 2400K/4000K
27/40 2700K/4000K
27/55 2700K/5500K

B10 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")

B11 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

B12 WIRE COLOR

WH White
BK Black

B13 WIRE TYPE

CL2 Class 2

B14 ILLUMINATED LENGTH

2"-576" in 2" increments

Available in Class 2 reel length of 48'. Each reel will have a 2' soldered lead wire attached. This product is not to be field-soldered.

REQUIRED ACCESSORY

UNIV-ROLLER




Roller tool used to lay MICRO 5 LED strips into extrusion housing

Included and required for all MICRO 5 field assembled options

To order additional, use UNIV-ROLLER


END CAPS

One pair of end caps is provided with each length of extrusion ordered.



Feed

To order separately, use POP-EC-MDIN-A-ST



Feed

To order separately, use POP-EC-MDIN-B-ST


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-09-04-26


MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


A1 / B1 PRODUCT - DIMENSIONS




Profile



Profile with mud-in accessory



Profile with mud-in accessory and spring clip



Profile with mud-in accessory and screw mount

A2 / B9 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with POP-01-DW-2.0-**-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	77	93	89	98	93	98	95	97	100	97
DF	69	93	81	98	83	98	86	97	93	97

A5 / B4 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



DF lens at 3000K

TEMPERATURE RATINGS

		DW 2.0 W/FT		DW 4.0 W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	110°F


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Recessed

A6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

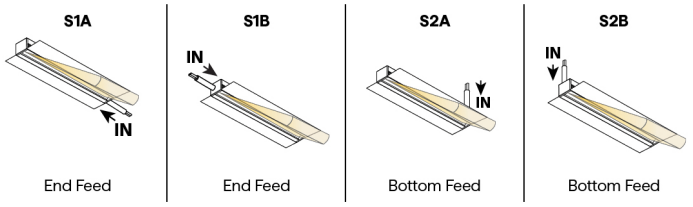


ASYMMETRIC ONLY PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

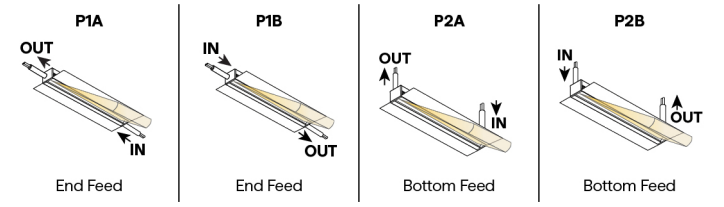


CONFIGURATION OPTIONS



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Connection by others


Non-Continuous Corner Feed



Continuous Bottom Feed




Continuous Bottom Feed



Continuous End to End Feed


A7 / A8 / B10 / B11 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24"
22 AWG

A9 / B12 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-09-04-26

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

A11 / B3 MOUNTING

POP-MD-MNT-KIT




Plastic Clip Kit

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use POP-MD-MNT-KIT

Each clip comes with a #4 x 3/16 Flat Head SS" and two #6 x 1/8" long set screws

SP




Spring Clip

Only to be used with mud-in accessory

4 clips provided for each full length of MUD-IN

To order separately use SP-02


832



832 Silicone

Sold separately

SC



Screw

6 #6x1.75" flat head screws are provided for each full length of MUD-IN

A12 FINISH


- Satin
- Black
- Bronze
- White

Custom finishes require a longer lead time, consult factory

A14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

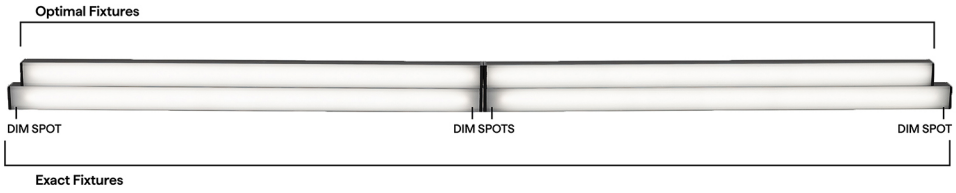


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS



24VDC Linear Fixtures - Recessed

DW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed
12"	10.50"		10.75"	
13"	12.50"		12.75"	
14"	12.50"		12.75"	
15"	14.50"		14.75"	
16"	14.50"		14.75"	
17"	16.50"		16.75"	
18"	16.50"		16.75"	
19"	18.50"		18.75"	
20"	18.50"		18.75"	
21"	20.50"		20.75"	
22"	20.50"		20.75"	
23"	22.50"		22.75"	
24"	22.50"		22.75"	
36"	34.50"		34.75"	
48"	46.50"		46.75"	
60"	58.50"		58.75"	
72"	70.50"		70.75"	
84"	82.50"		82.75"	
96"	94.50"		94.75"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP MUD-IN-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting