QOM-eLED+DMX-PS

24V DC Power Supply - 100W–400W



- Surface mount, exterior rated LED power supply center.
- Utilizes a 100W constant voltage LED Driver and the LINEARdrive DMX decoder from eldoLED.
- Capable of handling up to 400W of power and control within a single enclosure, offering flexibility in lighting applications.
- Designed to accommodate RGB or RGBW wires for versatile lighting options.
- Provides plenty of flexibility and comes with all modules prewired together with terminal blocks for landing your LED and control wires.
- Suitable for both indoor and outdoor use, and it has the additional option to be used in pool & spa applications.

ORDERING PROCESS

A Specify housing

B Specify power supply tray details

A. HOUSING

A1 PRODUCT	A2 COLOR
QT-CAB	

B. POWER SUPPLY TRAY DETAILS

B1 PRODUCT	B2 WATTAGE	B3 PRIMARY VOLTAGE	B4 SECONDARY VOLTAGE	B5 CONTROL	B6 ASSEMBLY	B7 CORRELATED HOUSING COLOR
QOM-eLED-PS		UNV	24VDC	DMX		

Sample Part Number: **QOM-eLED-PS-100W-UNV-24VDC-DMX-BK**

A1 PRODUCT

QOM

A2 COLOR

BK	Black Powder Coat Finish (Standard)
SS	316 Marine Grade Stainless Steel

B1 PRODUCT

QOM-eLED-PS

B2 WATTAGE

100W	1 100W Driver
200W	2 100W Drivers
300W	3 100W Drivers
400W	4 100W Drivers

B3 PRIMARY VOLTAGE

UNV	Universal (120-277V)

B4 SECONDARY VOLTAGE

24VDC

B5 CONTROL

DMX

B6 ASSEMBLY

FA	Factory Assembled
NI	Not Installed

Select NI to receive the housing before the power supply tray ships.

B7 CORRELATED HOUSING COLOR

BK	Black Powder Coat Finish (Standard)
SS	316 Marine Grade Stainless Steel

COMPATIBLE LEDS

STATIC WHITE

SW24/1.5-4.0 SW-DR24/1.5-4.0 SHLD-SW24/1.5-4.0 SW-SCOB24/1.5-4.0	
SW24/5.0, SW-HE, SW-HE+ SW-DR24/5.0, SW-HE-DR SHLD-SW24/5.0, SHLD-SW-HE SW-SCOB24/5.0	
SD-SW24/1.0-4.0	
SD-SW24/6.0	
SW-IA	
SW-XT	

OTHER

DW-HE Tunable Applications	
DW-HE Warm Dim Applications	
WD	
SC	
RGB	✓
RGBW, RGBW-HE	✓

If using DW LED, wattage must be doubled

SHEETS

Q-SHEETS SW	
Q-SHEETS DW Tunable Applications	
Q-SHEETS DW Warm Dim Applications	
Q-SHEETS RGB	
Q-SHEETS RGBW	

If using DW LED, wattage must be doubled

MICRO 5

MICRO 5-SW	
MICRO 5-DW Tunable Applications	
MICRO 5-DW Warm Dim Applications	
MICRO 5-RGB	✓

If using DW LED, wattage must be doubled

PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

QOM-eLED+DMX-PS

24V DC Power Supply - 100W–400W

PRODUCT INFORMATION

- Limited output voltage and current, plus isolation for safe operation
- Controllable with DMX decoder module
- Control 4 LED channels with DMX
- DMX dimming down to 0.1%
- Fully potted driver(s) for moisture resistance
- Primary voltage - universal (120-277V)
- Wide operating temperature range: -4˚F to 122˚F
- Fits up to (4):100W 24 VDC driver(s) and DMX decoder module(s)
- 5-year warranty
- Driver has Class A sound rating
- Class 2 output
- CSA #239924
- Low Voltage Lighting Systems
  - CSA Class 3425-15 and Class 3425-95
  - CSA Standard C22.2 No. 250.0-08 - Luminaires
  - ANSI/UL Standard 2108 - Low Voltage Lighting System
  - ANSI/UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products
  - CSA Std C22.2 No 250.13-14 - Light Emitting Diode (LED) Equipment for Lighting Applications
- Landscape Lighting Systems
  - CSA Class 3402-15 and Class 3402-95
  - CSA Standard C22.2 No. 250.7-07 - Extra-Low-Voltage Landscape Lighting Systems
  - ANSI/UL Standard 1838 - Low Voltage Landscape Lighting Systems
  - ANSI/UL Standard 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products
  - CSA Std C22.2 No 250.13-14 - Light Emitting Diode (LED) Equipment for Lighting Applications
- Hydromassage (Pool and Spa)
  - CSA Class 3425-46 and class 3425-96
  - UL Standard 379 - Power Unit for Fountain, Swimming Pool and Spa Luminaires
  - CSA STD C22.2 NO.89-15-Swimming Pool Luminaire, Submersible Luminaires and Accessories

VOLTAGE DROP CHART

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved

VDC	Load (W)	Distance from PS for 1% Voltage Drop								
		10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	17	170	107	67	42	27	17	11	7	4
	25	115	73	46	29	18	11	7	5	3
	40	72	45	29	18	11	7	5	3	2
	80	36	23	14	9	6	4	2	1	1
	100	29	18	11	7	5	3	2	1	1
VDC	Load (W)	Distance from PS for 3% Voltage Drop								
		10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	17	509	320	201	127	80	50	32	20	13
	25	346	218	137	86	54	34	21	14	9
	40	216	136	86	54	34	21	13	8	5
	80	108	68	43	27	17	11	7	4	3
	100	87	54	34	22	14	9	5	3	2
VDC	Load (W)	Distance from PS for 5% Voltage Drop								
		10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG	26 AWG
24	17	848	533	336	211	133	84	53	33	21
	25	577	363	228	143	90	57	36	22	14
	40	360	227	143	90	56	36	22	14	9
	80	180	113	71	45	28	18	11	7	4
	100	144	91	57	36	23	14	9	6	4


PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

QOM-eLED+DMX-PS

24V DC Power Supply - 100W–400W

A1 PRODUCT - DIMENSIONS

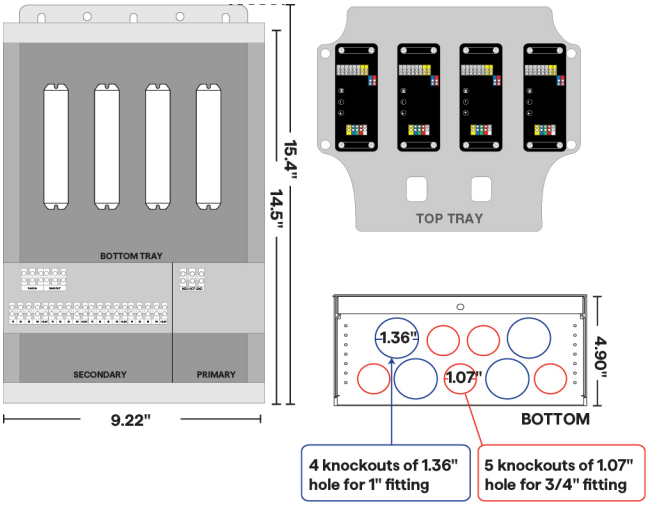

B2 TECHNICAL INFORMATION

Wattage	Max Load (Watts)	Secondary Voltage	Max Prim Amps @ 120V	Max Prim Amps @ 277V
100W	1×100W	24VDC	0.95A	0.40A
200W	2×100W	24VDC	1.90A	0.80A
300W	3×100W	24VDC	2.85A	1.20A
400W	4×100W	24VDC	3.80A	1.60A

HOUSING

- 18 gauge welded steel enclosure: 15.4"L x 9.22"W x 4.90"D
- Door: 14.5"L x 9.27"W
- Knockouts: 9
- Built-in support bracket incorporated to secure housing for surface mounting

PERFORMANCE

- Rated for surface mount, outdoor use
- Fully rated to operate low voltage load at listed wattage (No derating required)
- Voltage regulation to 2% or less of rated output voltage
- The ability to be dimmed using DMX dimming
- Universal input range of 120-277 Vrms
- Low Voltage Lighting Systems
  - CSA Class 3425-15 and Class 3425-95
- LED Landscape Lighting System Components
  - CSA Class 3402-15 and Class 3402-95
- Hydromassage (Pool & Spa)
  - CSA Class 3425-46 and Class 3425-96
  - Short circuit protection (SCP)
  - Over voltage protection (OVP)
  - Over current protection (OCP)
  - Live tested by the manufacturer to ensure proper operation
- Terminal blocks are made of tin plated copper with a voltage rating of 300V and a current rating of 40A

PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

QOM-eLED+DMX-PS

24V DC Power Supply - 100W–400W


SPECIFICATIONS


Input	24VDC		
Input Voltage (Vrms)	120	230	277
Input Current, max (Arms)	0.98	0.51	0.43
Inrush Current, max* (Apk)	-	20	-
Input Frequency (Hz)	50/60		
Input Power (Wmax)	117		

Output	RGB	RGBW
Output Voltage, nom (V)	24	24
Output Current (A) per channel	1.4	1.0
Output Power (Wmax)	100	100
Output Power (Wmax) per channel	60	60

Environmental	Min	Nom	Max
THD (%)	-	-	20
PF (%)	0.90	-	-
Case Temp (°F)	-	-	90

*-200us event

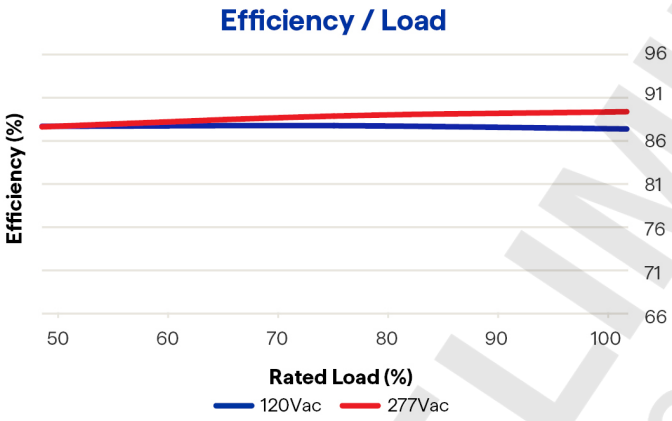

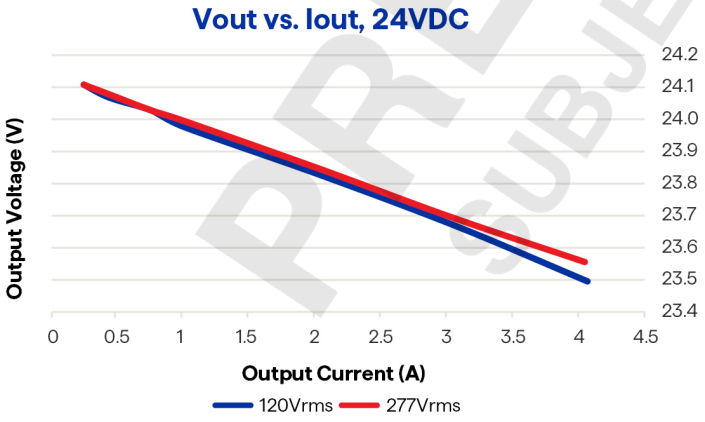

PROTECTIONS

- Short Circuit Protection (SCP)
- Over Voltage Protection (OVP)
- Over Current Protection (OCP)
- Class 2 Output

COMPLIANCE

- EMI Spec
  - FCC 47 Part 15
  - EN61000-3-2
- CSA Certified
  - UL-2108
  - UL-1838
  - UL-8750
  - UL 379
  - CSA C22.2 No 250.7-07
  - CSA C22.2 No 250.0-08
  - CSA C22.2 No 250.13-14
  - CSA C22.2 No 89-15

A2 COLOR



Black Powder Coat Finish (Standard)

316 Marine Grade Stainless Steel


PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

QOM-eLED+DMX-PS

24V DC Power Supply - 100W–400W

WIRING DIAGRAM

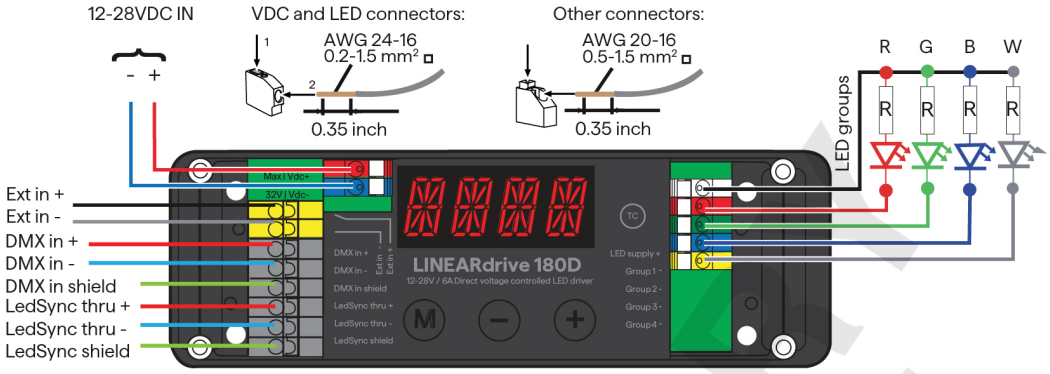

After 32 unit loads a repeater/booster should be used.
Keep cabling below 300 meters between the controller and the last driver.

12V - 28V DC IN

- To connect the driver to a DC power supply unit (PSU), connect the PSU's positive voltage supply wire to the VDC+ connector and the PSU's negative voltage supply wire to the VDC- connector.

EXT IN

- You have the possibility to connect an external control device (0-10V control device, 10kΩ potentiometer or show selection switch) to the driver's Ext in+ and Ext in - connector. Configure the driver for use with an external control device over the 3 - button user interface.

DMX IN/LEDSYNC OUT

- Use these connectors when the driver is used in a DMX network. For DMX in, connect the network cable's DMX+, DMX- and DMX shielding wire (the orange/white, orange and brown wire in a CAT5 cable) to the DMX in+, DMX in- and DMX in shield connector respectively. For LedSync out, connect the network cable's DMX+, DMX- and DMX shielding wire to the LedSync out+, LedSync out- and LedSync shield connector respectively. DMX Shield must be grounded to Earth ground at a single point external to power supply

LED GROUPS

- Indicates the location of the connectors for your LED groups. R(ed) represents channel 1, G(reen) represents channel 2, B(lue) represents channel 3 and W(hite) represents channel 4. The default group color allocation can be changed over the 3-button user interface.

COMPATIBLE CONTROL ACCESSORIES

DMX-US1	DMX-US3	UX8	iQ-DMX-STICK-CW4	iQ-DMX-STICK-DE3	iQ-DMX-STICK-GA2
					
DMX-based controller	DMX-based controller	Easy-to-use DMX-based controller	DMX controller for changing color & dimming	DMX controller for changing color & dimming	DMX controller for changing color & dimming

PRELIMINARY SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting