




FA-14

12V MR16 50W, 8W LED Flood/Accent

10 YEAR
WARRANTY
ALUMINUM

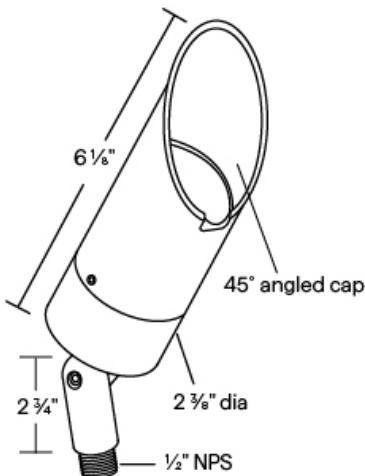

FA-14 Shown in Bronze Powder Coat Finish (BZ)
Knuckle: Tapered & Positive Locking

Dimensions: 2 3/8" dia. x 8 1/2" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2ft. 18/2 LV wire leads.
- “Self-Cleaning” cap style provides for debris to be washed away
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket
- Maximum Wattage: 50 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

1 PRODUCT	2 MATERIAL	3 FINISH
FA-14	A	

Sample Part Number: **FA-14-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
FA-14	A 6061 - T6 Aluminum	<p>BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White</p>


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



FA-14

12V MR16 50W, 8W LED Flood/Accent

1 PRODUCT - DIMENSIONS




2 MATERIAL



6061 - T6 Aluminum

3 FINISH

Eight Standard TGIC powder coat finishes available

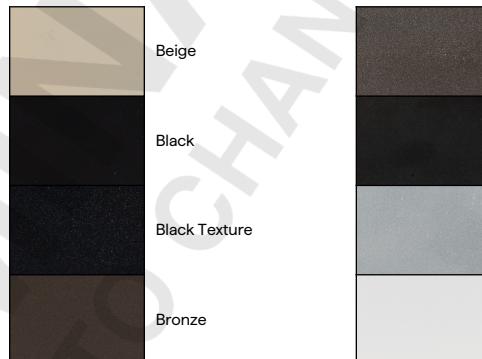

ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter To order separately use AY-2-MR16-BL	Light Blue Glass Filter To order separately use AY-2-MR16-LB	Pink Glass Filter To order separately use AY-2-MR16-PK	Amber Glass Filter To order separately use AY-2-MR16-AM	Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	Red Glass Filter To order separately use AY-2-MR16-RD	Green Glass Filter To order separately use AY-2-MR16-GR	Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA



FA-14

12V MR16 50W, 8W LED Flood/Accent

ACCESSORIES - LENS

Holds up to three accessories



ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 50 Watt, 8 Watt LED

MR16



EMERY ALLEN

1.0W, 3.0W, 5.0W,
7.0W

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS