




FA-19
12V MR16 Flood/Accent

10 YEAR
WARRANTY
ALUMINUM



FA-19 Shown in Bronze Powder Coat Finish (BZ)
Knuckle: Tapered & Positive Locking

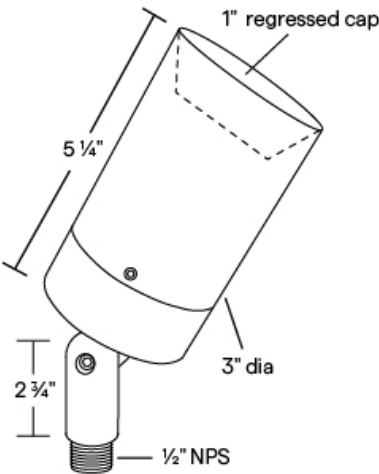

Weight: 2.1 lbs
Dimensions: 3" dia. x 7" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2ft. 18/2 LV wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 75 watt, 9 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

1	2	3
PRODUCT	MATERIAL	FINISH
FA-19	A	

Sample Part Number: FA-19-A-BK


1	2	3
PRODUCT	MATERIAL	FINISH
FA-19	A 6061 - T6 Aluminum	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture CA Clear Anodized SL Silver WH White

10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




FA-19
12V MR16 Flood/Accent

1 PRODUCT - DIMENSIONS

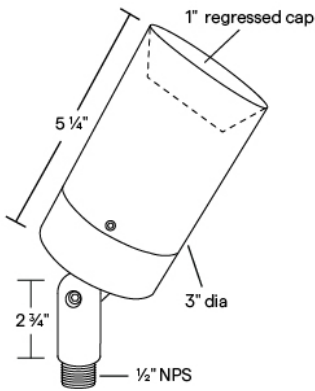

2 MATERIAL



3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR16-BL	To order separately use AY-2-MR16-LB	To order separately use AY-2-MR16-PK	To order separately use AY-2-MR16-AM	To order separately use AY-2-MR16-MV	To order separately use AY-2-MR16-RD	To order separately use AY-2-MR16-GR	To order separately use AY-2-MR16-DA



FA-19

12V MR16 Flood/Accent

ACCESSORIES - LENS

Holds up to three accessories

SP



Spread Lens

To order separately
use AY-1-MR16-1


LI



Linear Lens

To order separately
use AY-1-MR16-2

SO



Softening Lens

To order separately
use AY-1-MR16-3

LV



Louver Lens

To order separately
use AY-1-MR16-4

WI



Wire Holder

To order separately
use AY-1-MR16-5

FR



Frosted Lens

To order separately
use AY-1-MR16-6

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

MT-1



Ground Stake

MT-2



Adjustable Ground Stake

MT-6



Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike

LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 75 Watt, 9 Watt LED

MR16



SORAA

MR16



ELI

MR16



BRILLIANCE

MR16



EMERY ALLEN

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS