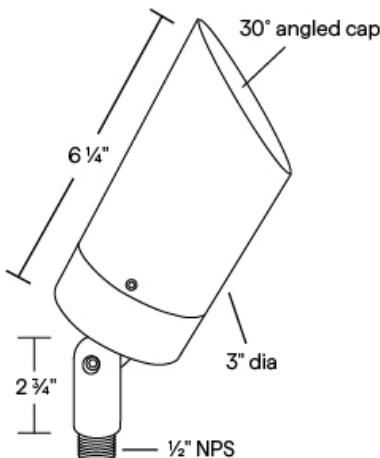


**FA-20**

12V MR16 Flood/Accent

10 YEAR  
WARRANTY  
ALUMINUMMADE IN AMERICA  
FROM DOMESTIC &  
FOREIGN PARTSUL  
1838 LISTED

FA-20 Shown in Bronze Powder Coat Finish (BZ)  
Knuckle: Tapered & Positive Locking

Weight: 2.1 lbs  
Dimensions: 3" dia. x 7" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2ft. 18/2 LV wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 75 watt, 9 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

1 PRODUCT	2 MATERIAL	3 FINISH
FA-20	A	

Sample Part Number: **FA-20-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
FA-20	A 6061 - T6 Aluminum	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture CA Clear Anodized SL Silver WH White


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




# FA-20

## 12V MR16 Flood/Accent

### 1 PRODUCT - DIMENSIONS

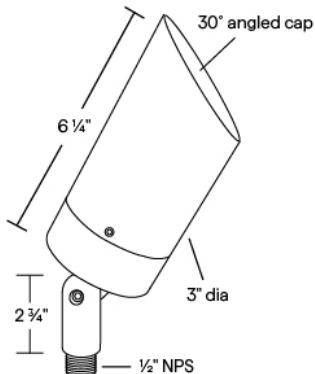

### 2 MATERIAL




### 3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



### ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

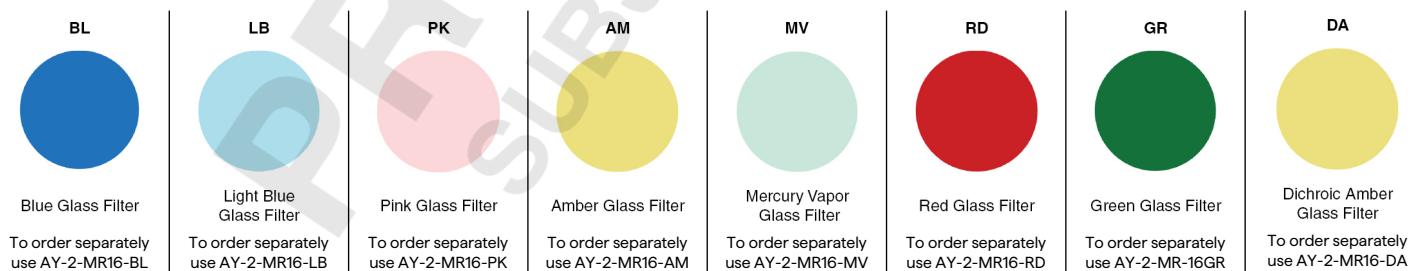



## FA-20

### 12V MR16 Flood/Accent

#### ACCESSORIES - LENS

Holds up to three accessories



#### ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



#### LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain  
Maximum wattage: 75 Watt, 9 Watt LED



#### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS