




FA-25
120V GU10 35W Halogen/8W LED
Flood/Accent

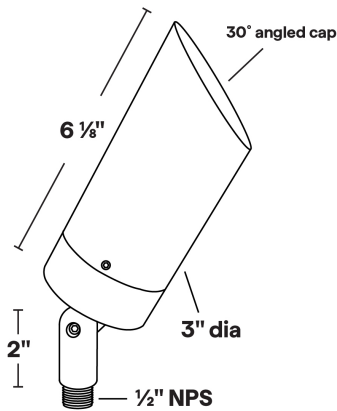

- 30° angled lens cap; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 120V
- Socket: GU10 Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for adjustable flood or accent lighting applications. Suitable for uplighting or downlighting. Can be utilized for ground mounted, tree mounted, or surface mounted installations.

FA-25 Shown in Bronze Texture Powder Coat Finish (BZT)
Knuckle: Tapered & Positive Locking

Dimensions: 3" dia. x 6 1/8"

1	2	3
PRODUCT	MATERIAL	FINISH
FA-25	A	

Sample Part Number: FA-24-A-BK


1	2	3
PRODUCT	MATERIAL	FINISH
FA-25	A Aluminum	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



FA-25
120V GU10 35W Halogen/8W LED Flood/Accent

1 PRODUCT - DIMENSIONS

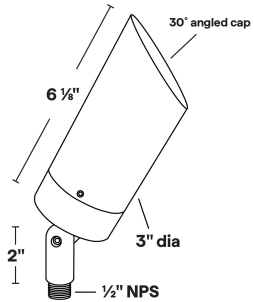


2 MATERIAL



Aluminum

3 FINISH

Eight Standard TGIC Free powder coat finishes available

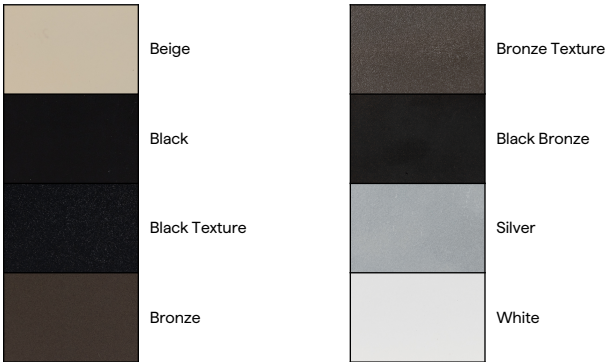

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately





FA-25

120V GU10 35W Halogen/8W LED Flood/Accent

LAMPS

MR16 Halogen or LED; GU10 Porcelain
Maximum wattage: 35W Halogen/8W LED

GU10	GU10
	
EMERY ALLEN 7.0W	EMERY ALLEN 3.0W AMBER