

Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures





- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- When using DALI and DMX power supplies, LED wattage must be doubled
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

ORDERING PROCESS

(A) Specify Non-Field Cuttable Q-CAP

(B) (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

A. NON-FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5	A6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
					ENC/TL

ADDITIONAL INFORMATION REQUIRED TO ORDER

A7	A8	A9	A10	A11	A12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL
			TL		

Sample Part Number: **LUME-01-DW-HE-MC-DRY-24/30-1.5HE-ENC/TL-P1-BW-BW-N/A-48"-E**

A1 PRODUCT

LUME-01-DW
LUME-01-DW-USA

Select USA option for BA, BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.

A2 MOUNTING

MC	Magnetic Clip
PPS-LP-CL-2	Clear PVC Clip
PPS-LP-CL-96	Clear PVC Channel
WSC	White Snug Clip

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

A3 RATED

DRY	IP20
WET	IP67

A4 CCT

A5 WATTAGE

A6 LENS

ENC/TL Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

A7 WIRE INPUT/OUTPUT

SINGLE (Input only)
S1 End Feed
S5 Seamless Feed

PASS THROUGH (Input/Output)
P1 End Feed
P5 Seamless Feed

A8 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9 CONNECTOR/WIRE OUT

N/A Closed End (No feed)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A10 END CAPS

Single	**TL**	Translucent
Pass Through	**N/A**	Not Applicable

A11 LENGTH (IN)

Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12".
Available in 2" increments.

A12 EXACT/OPTIMAL

O Optimal Illumination
E Exact Specified Length

Exact fixtures are the exact length specified +0 – 1/8".
Optimal fixtures' length is rounded down with illumination end to end.
See Exact/Optimal Fixture Length charts.

Warranty only valid with QTL power supplies | Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-08-28-26

Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

B. FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

B1	B2	B3	B4	B5	B6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS
					ENC/TL

ADDITIONAL INFORMATION REQUIRED TO ORDER

B7	B8	B9	B10	B11	B12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL

B1 PRODUCT

B2 MOUNTING

MC	Magnetic Clip
PPS-LP-CL-2	Clear PVC Clip
PPS-LP-CL-96	Clear PVC Channel
WSC	White Snug Clip

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

B3 RATED

B4 CCT

B5 WATTAGE

B6 LENS

B7 WIRE INPUT/OUTPUT

B8 CONNECTOR/WIRE IN

B9 CONNECTOR/WIRE OUT

B10 END CAPS

B11 LENGTH (IN)


B12 EXACT/OPTIMAL

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)

2 MOUNTING

WSC




White Snug Clip
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

MC




Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


PPS-LP-CL-2



Low profile PC Mounting Clip - Clear finish

To order separately use LUME-PPS-LP-CL-2

PPS-LP-CL-96



Low profile PC channel 96" straight linear run
Clear finish

To order separately use LUME-PPS-LP-CL-96

Each clip comes with a #8" flat screw

4/5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with LUME-01-DW-WSC-DRY

CCT	1.5HE W/FT ENC/TL		2.5HE W/FT ENC/TL	
	LM	CRI	LM	CRI
2200K	**	**	**	**
2400K	90	93	121	92
2700K	64	97	133	97
3000K	**	**	**	**
3500K	**	**	**	**
4000K	**	**	**	**

6 DIODE VISIBILITY

ENC/TL - Translucent encapsulation

TEMPERATURE RATINGS

	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	140°F	-4°F	125°F	-4°F	125°F	-4°F	110°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-08-28-26

Q-CAP LUME-01 FOR WARM DIM APPLICATIONS


24VDC Flexible Fixtures

BUG RATING

WATTAGE	B	U	G
1.5HE (ALL CCTs), 2.5HE (ALL CCTs)	B0	U1	G0


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




End Feed

SEAMLESS SINGLE (Input only)




Seamless Feed

SEAMLESS PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




Seamless Feed


CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed



Non-Continuous Corner Feed




Continuous End to End Feed




Field Cuttable - Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-08-28-26

Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

10 END CAPS (NO FEED)

TL



Translucent endcaps
.0" added at end


.00" dim spot

12 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →


E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



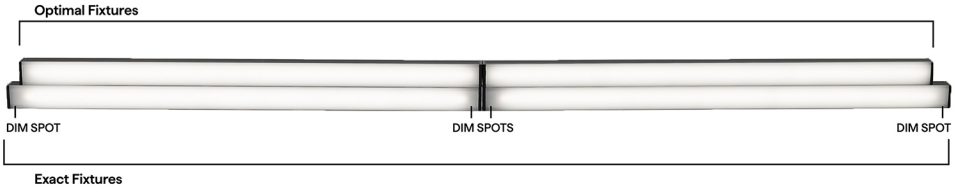


DW-HE ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1	P1	S5 & P5	
	S1  End Feed	P1  End Feed	S5  Seamless Feed	P5  Seamless Feed
12"	10.58"	10.95"	10.20"	
13"	12.58"	12.95"	12.20"	
14"	12.58"	12.95"	12.20"	
15"	14.58"	14.95"	14.20"	
16"	14.58"	14.95"	14.20"	
17"	16.58"	16.95"	16.20"	
18"	16.58"	16.95"	16.20"	
19"	18.58"	18.95"	18.20"	
20"	18.58"	18.95"	18.20"	
21"	20.58"	20.95"	20.20"	
22"	20.58"	20.95"	20.20"	
23"	22.58"	22.95"	22.20"	
24"	22.58"	22.95"	22.20"	
36"	34.58"	34.95"	34.20"	
48"	46.58"	46.95"	46.20"	
60"	58.58"	58.95"	58.20"	
72"	70.58"	70.95"	70.20"	
84"	82.58"	82.95"	82.20"	
96"	94.58"	94.95"	94.20"	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

Specification subject to change. Rev-08-28-26

Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS QOM-eLED+DALI-DT8 QOM-eLED+DALI-DT8-PS QOM-eLED+WD QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

Q-ANGLE



Adjustable mounting accessory

iQ-QCAP-UNV-CUTTER



QTL recommended FC Cutter


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting