




FA-28

120V PAR20 35W Halogen/11W LED
Flood/Accent

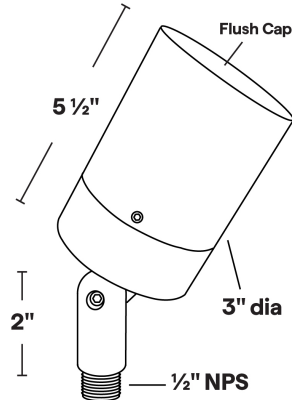

- Flush lens cap; holds up to two accessories.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10' of 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/11W LED
- Input Voltage: 120V
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for adjustable flood or accent lighting applications. Suitable for uplighting or downlighting. Can be utilized for ground mounted, tree mounted, or surface mounted installations.

FA-28 Shown in Bronze Texture Powder Coat Finish (BZT)
Knuckle: Tapered & Positive Locking

Dimensions: 3" dia. x 5 1/2"

| 1 | 2 | 3 |
|---------|----------|--------|
| PRODUCT | MATERIAL | FINISH |
| FA-28 | A | |

Sample Part Number: **FA-28-A-BK**

| 1 | 2 | 3 |
|---------|------------|---|
| PRODUCT | MATERIAL | FINISH |
| FA-28 | A Aluminum | <div><div>BG</div>Beige</div> <div><div>BB</div>Black Bronze</div> <div><div>BK</div>Black</div> <div><div>BKT</div>Black Texture</div> <div><div>BZ</div>Bronze</div> <div><div>BZT</div>Bronze Texture</div> <div><div>SL</div>Silver</div> <div><div>WH</div>White</div> |

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




FA-28

120V PAR20 35W Halogen/11W LED Flood/Accent

1

PRODUCT - DIMENSIONS



2

MATERIAL




Aluminum

3

FINISH

Eight Standard TGIC Free powder coat finishes available.

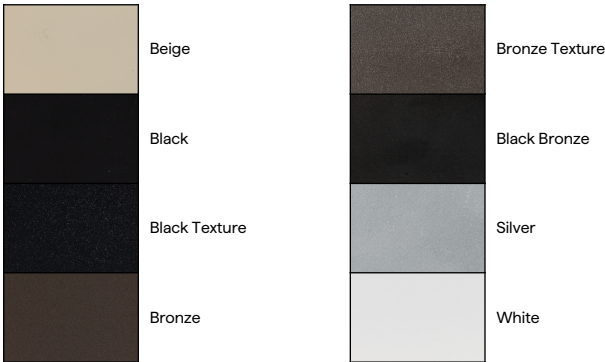

ACCESSORIES - LENS

Holds up to two accessories

| SP | LI | SO | LV | WI | FR |
|---|---|---|---|---|---|
| | | | | | |
| Spread Lens | Linear Lens | Softening Lens | Louver Lens | Wire Holder | Frosted Lens |
| To order separately use AY-1-PAR20-1 | To order separately use AY-1-PAR20-2 | To order separately use AY-1-PAR20-3 | To order separately use AY-1-PAR20-4 | To order separately use AY-1-PAR20-5 | To order separately use AY-1-PAR20-6 |



FA-28

120V PAR20 35W Halogen/11W LED Flood/Accent

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately

MT-24



Single Gang
Junction Box Cover

MT-25



Round 4/0 Junction
Box Cover

MT-26



Square 4/0 Junction
Box Cover

LAMPS

PAR20 Halogen or LED; Medium base ceramic
Maximum wattage: 35W Halogen/11W LED

PAR20



SORAA VIVID
11.0W

PAR20



SORAA BRILLIANT
8.5W, 11.0W