




FA-34

12V PAR36/AR111 Flood/Accent

10 YEAR
WARRANTY
ALUMINUM

MADE IN AMERICA
FROM DOMESTIC &
FOREIGN PARTS

UL
1838 LISTED

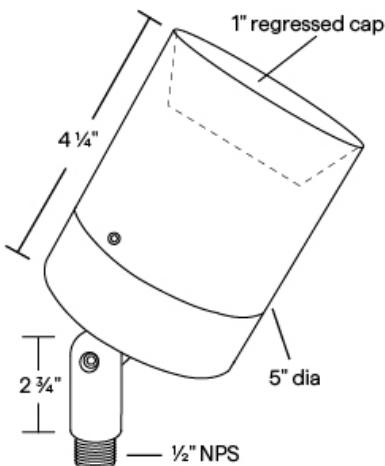

FA-35 Shown in Bronze Powder Coat Finish (BZ)
Knuckle: Tapered & Positive Locking

Weight: 2.1 lbs
Dimensions: 5" dia. x 6" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2ft. 18/2 LV wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 18.5 watt
- Input Voltage: 12V (remote transformer required)
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

1 PRODUCT	2 MATERIAL	3 FINISH
FA-35	A	

Sample Part Number: **FA-34-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
FA-35	A 6061 - T6 Aluminum	
		AC Aged Copper
		BG Beige
		BK Black
		BKT Black Texture
		BZ Bronze
		BZT Bronze Texture
		CA Clear Anodized
		SL Silver
		WH White


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



FA-34

12V PAR36/AR111 Flood/Accent

1 PRODUCT - DIMENSIONS

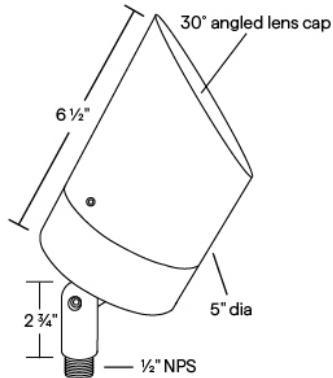

2 MATERIAL



6061 - T6 Aluminum

3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



ACCESSORIES - LENS

Holds up to three accessories



Spread Lens



Linear Lens



Softening Lens



Louver Lens



Wire Holder



Frosted Lens

To order separately
use AY-1-
PAR36/AR111 LED-1

To order separately
use AY-1-
PAR36/AR111 LED-2

To order separately
use AY-1-
PAR36/AR111 LED-3

To order separately
use AY-1-
PAR36/AR111 LED-4

To order separately
use AY-1-
PAR36/AR111 LED-5

To order separately
use AY-1-
PAR36/AR111 LED-6



FA-34

12V PAR36/AR111 Flood/Accent

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



LAMPS

PAR36/AR111 LED

Maximum wattage: 18.5 Watt



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS