





# Q-CAP BOXA™ RGB

## 24VDC Flexible Fixtures

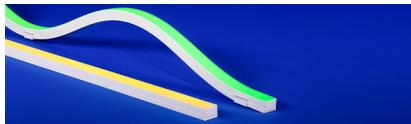

- Flexible encapsulated fixture
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Seven different mounting options
- Available in a seamless configuration for a continuous line of light
- Utilize clear endcaps for continuous runs
- Pair with ZALA's side bend to achieve compound curves
- standard Q-CAP flexible fixtures are not field cuttable
- IK10 impact rated

1 PRODUCT	2 MOUNTING	3 RATED	4 CCT	5 WATTAGE	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 END CAPS	11 LENGTH
BOXA-RGB			RGB	6.0					N/A	48"

Sample Part Number: **BOXA-RGB-PPS-2-DRY-RGB-6.0-ENC/CL-S1-BW-N/A-CL-48"-E**

<b>1</b> PRODUCT	<b>2</b> MOUNTING	<b>3</b> RATED	<b>4</b> CCT
BOXA-RGB  See last page for compatible power supplies.	RLC MC SGC PPS-2 PPS-96 PPS-LP-2 PPS-LP-96 WSC BN-UD-SST-16' BN-UD-SST-32' BN-UD-WH-16' BN-UD-WH-32'	DRY WET  IP20 IP67	RGB
	Rigid Lock Channel Magnetic Clip Side Graze Channel PVC Clip PVC Channel PVC Low Profile Clip PVC Low Profile Channel White Snug Clip 16' BENDIT Up/Down Stainless Steel Channel 32' BENDIT Up/Down Stainless Steel Channel 16' BENDIT Up/Down White Channel 32' BENDIT Up/Down White Channel		
	White snug clip only for indirect cove use, not intended for hanging fixtures upside down.  PPS mounting clip recommended for seamless applications		
<b>5</b> WATTAGE	<b>6</b> LENS	<b>7</b> WIRE INPUT/OUTPUT	
6.0 6.0W-SO  SO: Standard Output	ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed S5 Single 5 (Input only) - Seamless Feed	
<b>8</b> CONNECTOR/WIRE IN	<b>9</b> CONNECTOR/WIRE OUT	<b>10</b> END CAPS	<b>11</b> LENGTH
BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	N/A Closed End (No feed)	CL Clear WH White	48" Optimal  Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.


5 year warranty | Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Ambient or mounting surface must not be lower than -4°F or higher than 125°F | Patent # D872,931 S, D847,395 S, 10,619,828 B2 | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



## Q-CAP BOXA™ RGB


### 24VDC Flexible Fixtures

#### 1 PRODUCT - DIMENSIONS

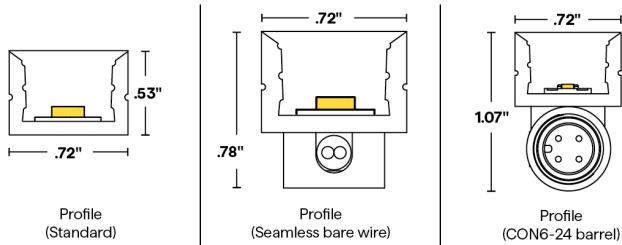


#### BEND RADIUS

##### Up/Down Bend




6" bending radius

#### FLEXIBILITY

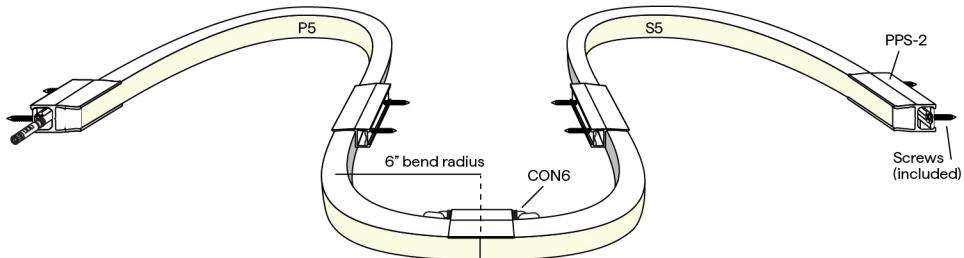

#### 2 MOUNTING


##### WSC



White Snug Clip  
Indirect uplight

To order separately use WSC

##### RLC



To order separately use RLC

Each clip comes with a #6x5/8" flat screw


##### MC



To order separately use MC

Each clip comes with a #6x5/8" flat screw


##### SGC



To order separately use SGC

Each clip comes with a #6x5/8" flat screw

##### PPS-2




To order separately use BOXA-  
PPS2



## Q-CAP BOXA™ RGB

### 24VDC Flexible Fixtures


## MOUNTING CONTINUED



96" straight linear run


To order separately use BOXA-PPS-96

Each clip comes with a #8" flat screw



Low profile PVC Mounting Clip


To order separately use BOXA-PPS-LP-2



Low profile PVC channel 96" straight linear run

To order separately use BOXA-PPS-LP-96

Each clip comes with a #8" flat screw



BENDIT Channel  
Vertical Stainless Steel  
Flexible Channel

Continuous mounting solution for  
flexible fixtures, 16' or 32' field  
cuttable lengths

To order separately use either  
STND-QCAP-BN-UD-SST-16',  
STND-QCAP-BN-UD-SST-32',  
STND-QCAP-BN-UD-WH-16', or  
STND-QCAP-BN-UD-WH-32'

64 #4-40 1/2" screws provided per  
16'

## 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with BOXA-RGB-WSC-DRY

CCT	6.0W/FT Total Load				
	ENC/CL		ENC/TL		Circuit Wattage
	LM	Wavelength	LM	Wavelength	
Red	90	630	67	631	2.4
Green	174	522	127	522	1.9
Blue	52	470	37	470	1.7
All	294	-	216	-	6.0

## 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation



ENC/TL - Translucent encapsulation

## BUG RATING

WATTAGE	B	U	G
6.0 (ALL CCTs)	B0	U1	G0

## TEMPERATURE RATINGS

	6.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-14°F	90°F
Storage Temp	-13°F	176°F
Installation Temp	50°F	100°F




# Q-CAP BOXA™ RGB


## 24VDC Flexible Fixtures

### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)

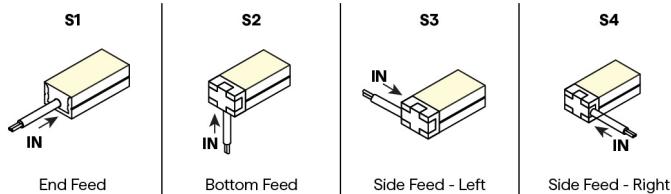


SEAMLESS SINGLE (Input only)




Seamless Feed

PASS THROUGH (Input/Output)

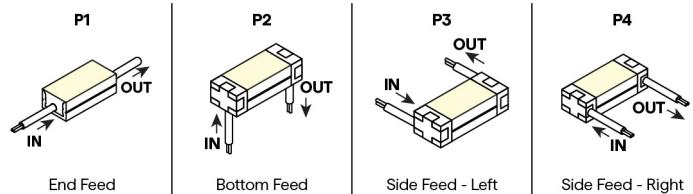


SEAMLESS PASS THROUGH (Input/Output)




Seamless Feed


### CONFIGURATION OPTIONS

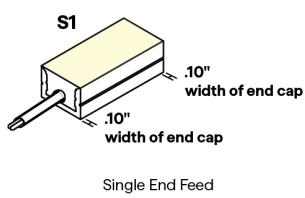


Single End Feed

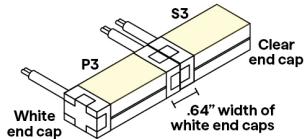


Continuous Side Feed - Left




Field Cuttable - Continuous End to End Feed

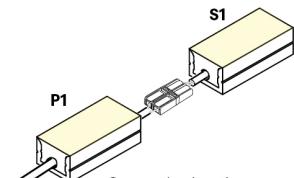


Connection by others  
Non-Continuous End Feed

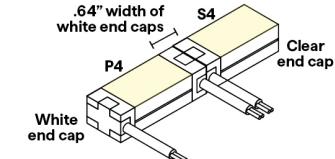


Continuous Side Feed - Right

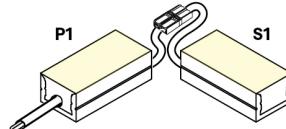


Connection by others  
Non-Continuous Corner Feed

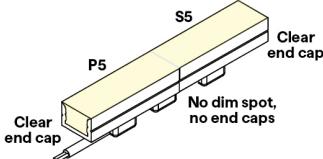


Seamless Bottom Feed

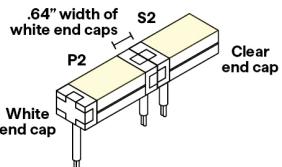

Continuous Bottom Feed



Continuous End to End Feed

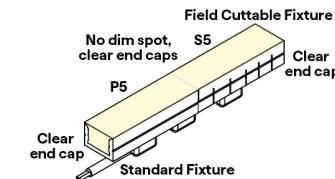


Field Cuttable - Seamless Bottom Feed



# Q-CAP BOXA™ RGB

## 24VDC Flexible Fixtures

### FIELD CUTTABLE MARKING

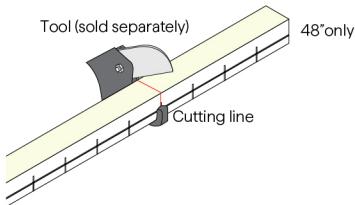

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

### SEAMLESS


Shown with bare wire, connectors vary




Omnidirectional  
wireways  
S5, P5

### 8 / 9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps

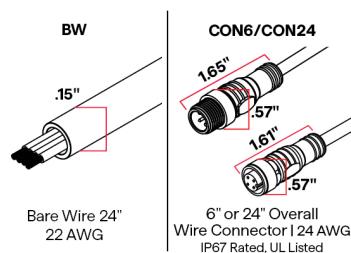

### 10 END CAPS (NO FEED)

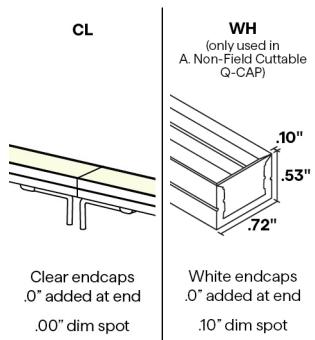


### END CAPS (WITH FEED)

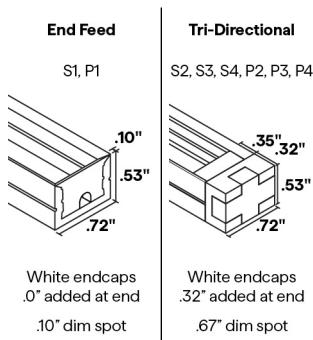

### 11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"






# Q-CAP BOXA™ RGB

## 24VDC Flexible Fixtures

### 12 EXACT/OPTIMAL FIXTURE LENGTH

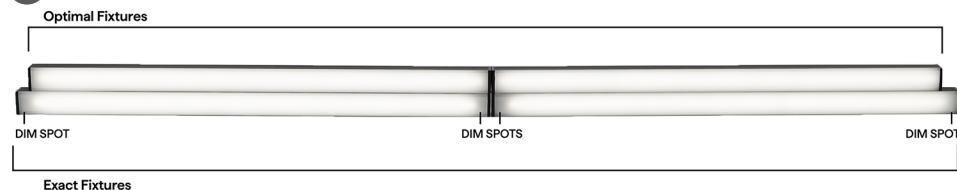

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

### RGB LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture with S1 wireway
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 S1	S2 & S3 & S4	P1	P2 & P3 & P4	S5 & P5
12"	10.58"	10.98"	10.95"	11.75"	10.2"
13"	12.58"	12.98"	12.95"	11.75"	12.2"
14"	12.58"	12.98"	12.95"	13.75"	12.2"
15"	14.58"	14.98"	14.95"	13.75"	14.2"
16"	14.58"	14.98"	14.95"	15.75"	14.2"
17"	16.58"	16.98"	16.95"	15.75"	16.2"
18"	16.58"	16.98"	16.95"	17.75"	16.2"
19"	18.58"	18.98"	18.95"	17.75"	18.2"
20"	18.58"	18.98"	18.95"	19.75"	18.2"
21"	20.58"	20.98"	20.95"	19.75"	20.2"
22"	20.58"	20.98"	20.95"	21.75"	20.2"
23"	22.58"	22.98"	22.95"	21.75"	22.2"
24"	22.58"	22.98"	22.95"	23.75"	22.2"
36"	34.58"	34.98"	34.95"	35.75"	34.2"
48"	46.58"	46.98"	46.95"	47.75"	46.2"
60"	58.58"	58.98"	58.95"	59.75"	58.2"
72"	70.58"	70.98"	70.95"	71.75"	70.2"
84"	82.58"	82.98"	82.95"	83.75"	82.2"
96"	94.58"	94.98"	94.95"	95.75"	94.2"

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $\pm 5\%$  tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	




# Q-CAP BOXA™ RGB

## 24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8

## COMPATIBLE MOUNTING ACCESSORIES

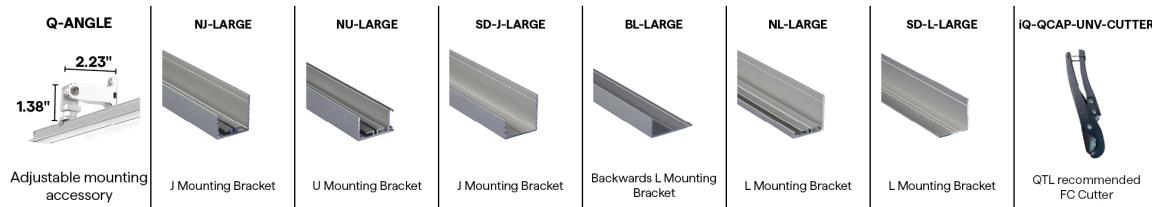

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write DMX addresses and adjust voltage