




Q-CAP NEXUS STATIC WHITE

24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Both helical bend and up/down bend
- 4" bend radius
- Interior and exterior rated (not including FC)
- 60% smaller than QTL's WURM fixture
- standard Q-CAP flexible fixtures are not field cuttable

1 PRODUCT	2 MOUNTING	3 RATED	4 CCT	5 WATTAGE	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 END CAPS	11 LENGTH
						S1	BW	N/A	WH	48"

Sample Part Number: **NEXUS-SW-WSC-DRY-30-4.0-ENC/TL-P1-BW-BW-N/A-48"-E**

1 PRODUCT NEXUS-SW NEXUS-SW-USA Select USA option for BA, BAA and BABA projects. See last page for compatible power supplies.	2 MOUNTING WSC BN-UD-SST-16' BN-UD-SST-32' BN-UD-WH-16' BN-UD-WH-32' White Snug Clip 16' BENDIT Up/Down Stainless Steel Channel 32' BENDIT Up/Down Stainless Steel Channel 16' BENDIT Up/Down White Channel 32' BENDIT Up/Down White Channel White snug clip only for cove use, not intended for hanging fixtures upside down.	3 RATED DRY IP20 WET IP67	4 CCT 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K
5 WATTAGE 1.0 1.0W-SO 2.0 2.0W-HO 4.0 4.0W-VHO SO: Standard Output HO: High Output VHO: Very High Output	6 LENS ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent For representation of LED visibility, see Diode Visibility section on following pages	7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed	
8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48")	9 CONNECTOR/WIRE OUT N/A Closed End (No feed)	10 END CAPS WH White	11 LENGTH 48" Optimal Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 1" increments.


5 year warranty | Up/Down & Helical Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP NEXUS STATIC WHITE


24VDC Flexible Fixtures

1 PRODUCT - DIMENSIONS




Profile
(Standard)


BEND RADIUS



FLEXIBILITY

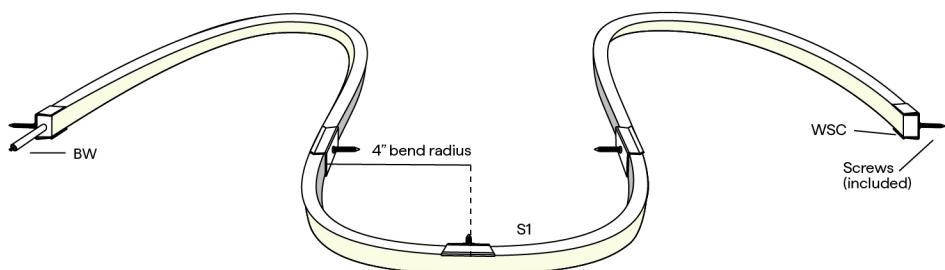


2 MOUNTING



To order separately use WSC-02

Each clip comes with a #4x5/8" flat screw



BENDIT Channel
Vertical Stainless Steel
Flexible Channel

Continuous mounting solution for
flexible fixtures, 16' or 32' field
cuttable lengths

To order separately use either
MICRO5-BN-UD-S-SST-16',
MICRO5-BN-UD-S-SST-32',
MICRO5-BN-UD-S-WH-16', or
MICRO5-BN-UD-S-WH-32'

64 #4-40 1/2" screws provided per
16'



Q-CAP NEXUS STATIC WHITE

24VDC Flexible Fixtures

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with NEXUS-SW-WSC-DRY

CCT	1.0W/FT				2.0W/FT				4.0W/FT			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL		ENC/CL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	48	94	37	93	129	93	98	94	285	93	251	93
2700K	50	96	38	96	137	97	99	96	295	97	253	96
3000K	53	96	39	98	141	96	101	98	304	96	252	98
3500K	55	97	41	98	149	97	104	98	306	97	271	98
4000K	59	98	44	98	159	98	112	98	313	97	293	98

TEMPERATURE RATINGS


	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	125°F	-4°F	100°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F

BUG RATING

WATTAGE	B	U	G
1.0 (ALL CCTs), 2.0 (ALL CCTs), 4.0 (ALL CCTs)	B0	U1	G0


7 WIRE INPUT/OUTPUT

SINGLE (Input only)



End Feed

PASS THROUGH (Input/Output)




End Feed




Q-CAP NEXUS STATIC WHITE

24VDC Flexible Fixtures


CONFIGURATION OPTIONS




Single End Feed




Connection by others
Non-Continuous End Feed



Connection by others
Non-Continuous Corner Feed




Continuous End to End Feed



Field Cuttable - Continuous End to End Feed

FIELD CUTTABLE MARKING

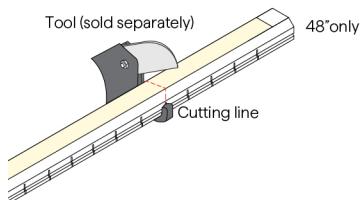

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




Q-CAP NEXUS STATIC WHITE

24VDC Flexible Fixtures

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps


BW



Bare Wire 24"
Stranded 22 AWG

10 END CAPS (NO FEED)

WH
(only used in
A. Non-Field Cuttable
Q-CAP)




White endcaps
.0" added at end
.225" dim spot

END CAPS (WITH FEED)

End Feed


S1, P1




White endcaps
.0" added at end
.225" dim spot

11 LENGTH - WIRING DETAIL

Available in 1" increments 12"-191"



12 EXACT/OPTIMAL FIXTURE LENGTH

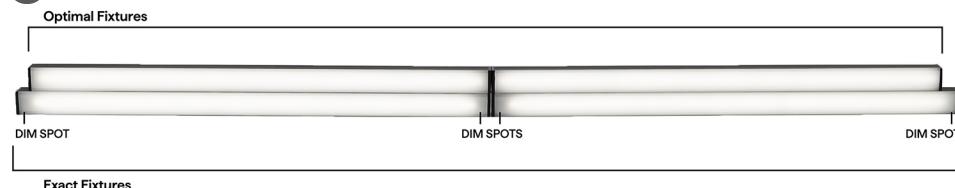

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



Q-CAP NEXUS STATIC WHITE

24VDC Flexible Fixtures

SW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1	P1
	IN	OUT
12"	11.63"	11.75"
13"	12.63"	12.75"
14"	13.63"	13.75"
15"	14.63"	14.75"
16"	15.63"	15.75"
17"	16.63"	16.75"
18"	17.63"	17.75"
19"	18.63"	18.75"
20"	19.63"	19.75"
21"	20.63"	20.75"
22"	21.63"	21.75"
23"	22.63"	22.75"
24"	23.63"	23.75"
36"	35.63"	35.75"
48"	47.63"	47.75"
60"	59.63"	59.75"
72"	71.63"	71.75"
84"	83.63"	83.75"
96"	95.63"	95.75"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED




Q-CAP NEXUS STATIC WHITE


24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

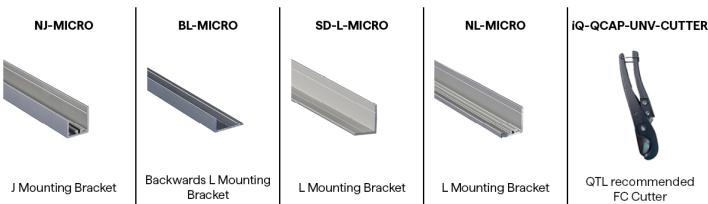

COMPATIBLE WIRING ACCESSORIES

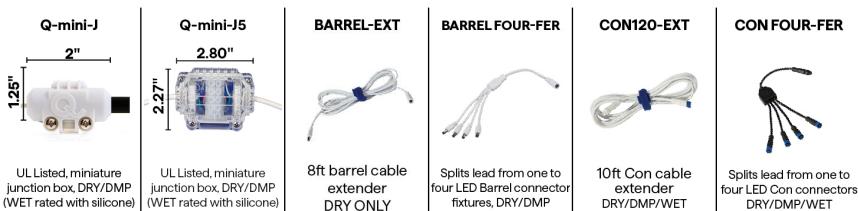



Q-CAP NEXUS STATIC WHITE

24VDC Flexible Fixtures

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage