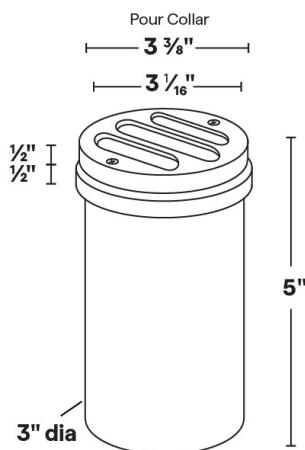


**IN-3**12V MR16 35W Halogen/8W LED In Ground
LightIN-3 Shown in Bronze Texture Powder Coat Finish
(BZT)

Dimensions: 3" dia. x 5"

- 6061 Marine Grade Aluminum. Aluminum components are anodized, then a polyester powder coat finish is applied.
- Machined louvered top with three 1/2" slots.
- Tempered glass lens.
- 6 feet of 16/2 low voltage cable supplied.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.

① PRODUCT	② MATERIAL	③ FINISH
IN-3	A	

Sample Part Number: **IN-3-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
IN-3	A Aluminum	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



IN-3

12V MR16 35W Halogen/8W LED In Ground Light

1 PRODUCT - DIMENSIONS




2 MATERIAL



Aluminum

3 FINISH

Eight Standard TGIC Free powder coat finishes available

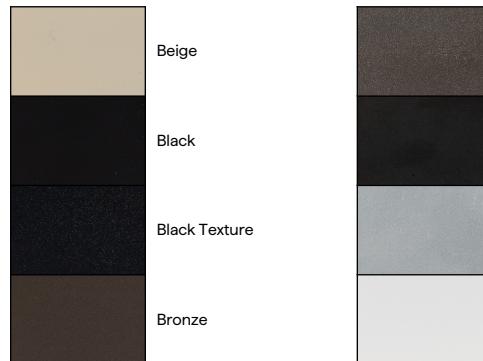

ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter To order separately use AY-2-MR16-BL	Light Blue Glass Filter To order separately use AY-2-MR16-LB	Pink Glass Filter To order separately use AY-2-MR16-PK	Amber Glass Filter To order separately use AY-2-MR16-AM	Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	Red Glass Filter To order separately use AY-2-MR16-RD	Green Glass Filter To order separately use AY-2-MR16-GR	Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA



IN-3

12V MR16 35W Halogen/8W LED In Ground Light

ACCESSORIES - LENS

Holds up to three accessories

SP	LI	SO	LV	WI	FR
Spread Lens To order separately use AY-1-MR16-1	Linear Lens To order separately use AY-1-MR16-2	Softening Lens To order separately use AY-1-MR16-3	Louver Lens To order separately use AY-1-MR16-4	Wire Holder To order separately use AY-1-MR16-5	Frosted Lens To order separately use AY-1-MR16-6

LAMPS

MR16 Halogen or LED; GU5.3 Bi-Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16	MR16
EMERY ALLEN 1.0W, 3.0W, 5.0W, 7.0W	EMERY ALLEN 3W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS