




# Test - Aluminum-1

## 12V MR16 Accent Light

10 YEAR  
WARRANTY  
ALUMINUM

MADE IN AMERICA  
FROM DOMESTIC &  
FOREIGN PARTS

UL  
1838 LISTED

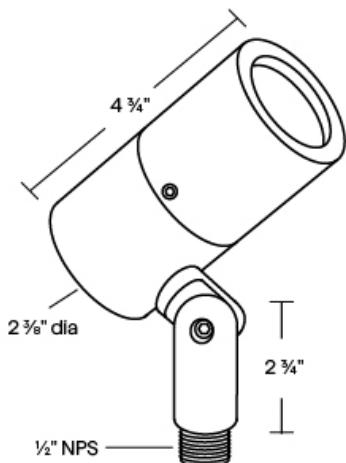

AL-1 Shown in Bronze Powder Coat Finish  
(BZ)Knuckle: Tapered & Positive Locking

Weight: 1.6 lbsDimensions: 2 3/8" dia. x 4 3/4" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2ft. 18/2 LV wire leads.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 50 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Clear tempered glass lens, glued in.
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for flood or accent lighting applications.

① PRODUCT	② MATERIAL	③ FINISH
AL-1	A	

Sample Part Number: **AL-1-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
AL-1	A 6061 - T6 Aluminum	<p>AC Aged Copper        BG Beige        BK Black        BKT Black Texture        BZ Bronze        BZT Bronze Texture        CA Clear Anodized        SL Silver        WH White</p>


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




# Test - Aluminum-1

12V MR16 Accent Light

## 1 PRODUCT - DIMENSIONS

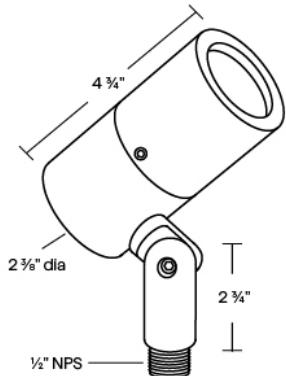

## 2 MATERIAL



6061 - T6 Aluminum

## 3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available




## ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.



Blue Glass Filter




To order separately  
use AY-2-MR16-LB




To order separately  
use AY-2-MR16-PK




To order separately  
use AY-2-MR16-AM




To order separately  
use AY-2-MR16-MV



To order separately  
use AY-2-MR16-RD



To order separately  
use AY-2-MR16-GR



To order separately  
use AY-2-MR16-DA



## Test - Aluminum-1

12V MR16 Accent Light

### ACCESSORIES - LENS

Holds up to three accessories



### ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



### LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain  
Maximum wattage: 50 Watt, 8 Watt LED



### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS