




Test - Both -1

12V MR16 Accent Light

10 YEAR
WARRANTY
ALUMINUM

MADE IN AMERICA
FROM DOMESTIC &
FOREIGN PARTS

UL
1838 LISTED

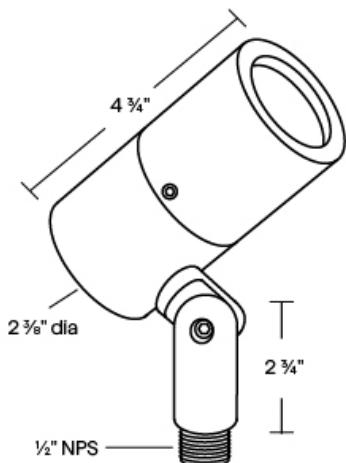

AL-1 Shown in Bronze Powder Coat Finish
(BZ) Knuckle: Tapered & Positive Locking

Weight: 1.6 lbs Dimensions: 2 3/8" dia. x 4 3/4" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2ft. 18/2 LV wire leads.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 50 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Clear tempered glass lens, glued in.
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for flood or accent lighting applications.

1 PRODUCT	2 MATERIAL	3 FINISH
AL-1		

Sample Part Number: **AL-1-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
AL-1	A 6061 - T6 Aluminum	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture CA Clear Anodized SL Silver WH White
	B C36000 Brass	DB Dark Bronze NT Natural


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



Test - Both -1

12V MR16 Accent Light

1 PRODUCT - DIMENSIONS

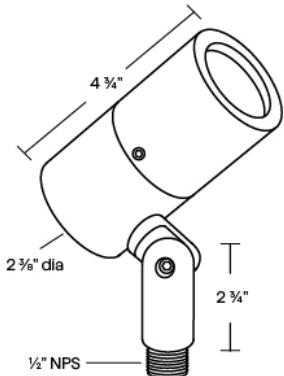

2 MATERIAL

6061 - T6 Aluminum
C36000 Brass

3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL 	LB 	PK 	AM 	MV 	RD 	GR 	DA
Blue Glass Filter To order separately use AY-2-MR16-BL	Light Blue Glass Filter To order separately use AY-2-MR16-LB	Pink Glass Filter To order separately use AY-2-MR16-PK	Amber Glass Filter To order separately use AY-2-MR16-AM	Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	Red Glass Filter To order separately use AY-2-MR16-RD	Green Glass Filter To order separately use AY-2-MR16-GR	Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA



Test - Both -1

12V MR16 Accent Light

ACCESSORIES - LENS

Holds up to three accessories



ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 50 Watt, 8 Watt LED



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS