




Test - Brass-1
12V MR16 Accent Light

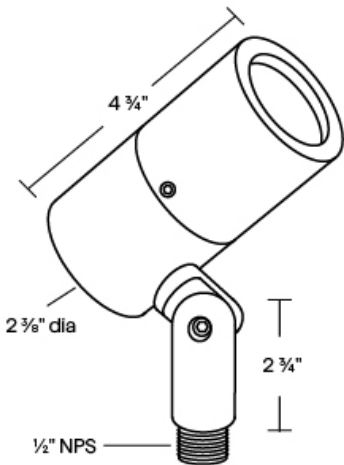

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2ft. 18/2 LV wire leads.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 50 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Clear tempered glass lens, glued in.
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for flood or accent lighting applications.

AL-1 Shown in Bronze Powder Coat Finish (BZ)Knuckle: Tapered & Positive Locking
Weight: 1.6 lbsDimensions: 2 3/8" dia. x 4 3/4" overall

1	2	3
PRODUCT	MATERIAL	FINISH
AL-1	B	

Sample Part Number: AL-1-A-BK

1	2	3
PRODUCT	MATERIAL	FINISH
AL-1	B C36000 Brass	DB Dark Bronze NT Natural


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



Test - Brass-1

12V MR16 Accent Light

1 PRODUCT - DIMENSIONS

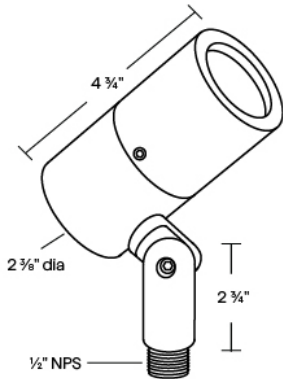

2 MATERIAL











3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
							
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR16-BL	To order separately use AY-2-MR16-LB	To order separately use AY-2-MR16-PK	To order separately use AY-2-MR16-AM	To order separately use AY-2-MR16-MV	To order separately use AY-2-MR16-RD	To order separately use AY-2-MR-16GR	To order separately use AY-2-MR16-DA









Test - Brass-1

12V MR16 Accent Light

ACCESSORIES - LENS

Holds up to three accessories

<p>SP</p>  <p>Spread Lens</p> <p>To order separately use AY-1-MR16-1</p>	<p>LI</p>  <p>Linear Lens</p> <p>To order separately use AY-1-MR16-2</p>	<p>SO</p>  <p>Softening Lens</p> <p>To order separately use AY-1-MR16-3</p>	<p>LV</p>  <p>Louver Lens</p> <p>To order separately use AY-1-MR16-4</p>	<p>WI</p>  <p>Wire Holder</p> <p>To order separately use AY-1-MR16-5</p>	<p>FR</p>  <p>Frosted Lens</p> <p>To order separately use AY-1-MR16-6</p>
---	---	--	---	---	--





ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

<p>MT-1</p>  <p>Ground Stake</p>	<p>MT-2</p>  <p>Adjustable Ground Stake</p>	<p>MT-6</p>  <p>Stainless Steel Ground Spike</p>	<p>MT-7</p>  <p>Stainless Steel Ground Spike</p>	<p>MT-8</p>  <p>Stainless Steel Ground Spike</p>
---	--	---	---	---

LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 50 Watt, 8 Watt LED

<p>MR16</p>  <p>SORAA</p>	<p>MR16</p>  <p>ELI</p>	<p>MR16</p>  <p>BRILLIANCE</p>	<p>MR16</p>  <p>EMERY ALLEN</p>
--	--	---	--

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS