




FA-7

12V MR16 35W Halogen/8W LED
Flood/Accent



FA-7 Shown in Bronze Texture Powder Coat Finish (BZT)
Knuckle: Tapered & Positive Locking

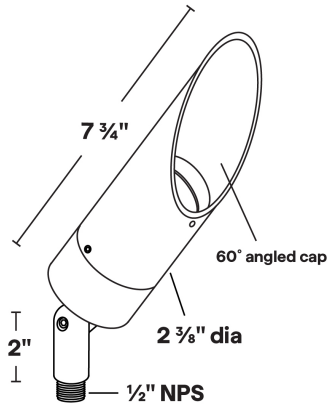

Dimensions: 2 3/8" dia. x 7 3/4"

- 60° angled lens cap; holds up to three accessories.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2' of 18/2 LV wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for adjustable flood or accent lighting applications. Suitable for uplighting or downlighting. Can be utilized for ground mounted, tree mounted, or surface mounted installations.

| ① | ② | ③ |
|---------|----------|--------|
| PRODUCT | MATERIAL | FINISH |
| FA-7 | A | |

Sample Part Number: **FA-7-A-BK**

| ① | ② | ③ |
|---------|------------|---|
| PRODUCT | MATERIAL | FINISH |
| FA-7 | A Aluminum | <div><div>BG</div>Beige</div> <div><div>BB</div>Black Bronze</div> <div><div>BK</div>Black</div> <div><div>BKT</div>Black Texture</div> <div><div>BZ</div>Bronze</div> <div><div>BZT</div>Bronze Texture</div> <div><div>SL</div>Silver</div> <div><div>WH</div>White</div> |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



FA-7

12V MR16 35W Halogen/8W LED Flood/Accent

1 PRODUCT - DIMENSIONS



2 MATERIAL



Aluminum

3 FINISH

Eight Standard TGIC Free powder coat finishes available



ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

| BL | LB | PK | AM | MV | RD | GR | DA |
|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | | | | |
| Blue Glass Filter | Light Blue Glass Filter | Pink Glass Filter | Amber Glass Filter | Mercury Vapor Glass Filter | Red Glass Filter | Green Glass Filter | Dichroic Amber Glass Filter |
| To order separately use AY-2-MR16-BL | To order separately use AY-2-MR16-LB | To order separately use AY-2-MR16-PK | To order separately use AY-2-MR16-AM | To order separately use AY-2-MR16-MV | To order separately use AY-2-MR16-RD | To order separately use AY-2-MR16-GR | To order separately use AY-2-MR16-DA |



FA-7

12V MR16 35W Halogen/8W LED Flood/Accent

ACCESSORIES - LENS

Holds up to three accessories

| | | | | | |
|---|---|--|---|---|--|
| SP  Spread Lens To order separately use AY-1-MR16-1 | LI  Linear Lens To order separately use AY-1-MR16-2 | SO  Softening Lens To order separately use AY-1-MR16-3 | LV  Louver Lens To order separately use AY-1-MR16-4 | WI  Wire Holder To order separately use AY-1-MR16-5 | FR  Frosted Lens To order separately use AY-1-MR16-6 |
|---|---|--|---|---|--|

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately

| | | | | |
|--|---|--|--|--|
| MT-1  Ground Stake | MT-2  Adjustable Ground Stake | MT-6  Stainless Steel Ground Spike | MT-7  Stainless Steel Ground Spike | MT-8  Stainless Steel Ground Spike |
|--|---|--|--|--|

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

| | |
|---|---|
| MR16  EMERY ALLEN 1.0W, 3.0W, 5.0W, 7.0W | MR16  EMERY ALLEN 3W AMBER |
|---|---|

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIMMING PROTOCOL | OUTDOOR |
|---------------------|--|
| | LANDSCAPE LIGHTING |
| Phase | Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS |