





# MICRO 5 POP-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed



- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Asymmetric fixture with an 80° focused beam 20° off-nadir
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation is available in clear or translucent
- Suitable for indoor and outdoor locations
- Ideal for recessed installations that call for low-profile light in small areas
- Red, Green, and Blue LED allows for color changing applications

1	2	3	4	5	6	7	8	9	10	11	12	13	14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
POP-03-RGB	4.0	RGB	ENC	TL									

Sample Part Number: **POP-03-RGB-4.0-RGB-ENC-TL-S1A-BW-CLS-WH-CL2-MG-ST-48"-E**

<b>1</b> <b>PRODUCT</b> <b>POP-03-RGB</b> See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> <b>4.0</b> 4.0W/ft	<b>3</b> <b>CCT</b> <b>RGB</b>	<b>4</b> <b>RATED</b> <b>ENC</b> IP67	<b>5</b> <b>LENS</b> <b>TL</b> Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.
<b>6</b> <b>WIRE INPUT/OUTPUT</b> <b>S1A</b> Single 1 (Input only) - End Feed <b>S1B</b> Single 1 (Input only) - End Feed <b>S2A</b> Single 2 (Input only) - Bottom Feed <b>S2B</b> Single 2 (Input only) - Bottom Feed For continuous mounting, consider bottom feed.	<b>7</b> <b>CONNECTOR/WIRE IN</b> <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>8</b> <b>CONNECTOR/WIRE OUT</b> <b>CLS</b> Closed End (No feed)		
<b>P1A</b> Pass Through 1 (Input/output) - End Feed <b>P1B</b> Pass Through 1 (Input/output) - End Feed <b>P2A</b> Pass Through 2 (Input/output) - Bottom Feed <b>P2B</b> Pass Through 2 (Input/output) - Bottom Feed For continuous mounting, consider bottom feed.	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		
<b>9</b> <b>WIRE COLOR</b> <b>WH</b> White <b>BK</b> Black	<b>10</b> <b>WIRE TYPE</b> <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated CL2P only available with bare wire leads (BW)	<b>11</b> <b>MOUNTING</b> <b>MG</b> Magnet <b>832</b> 832 Silicone <b>PL</b> Plastic Clip	<b>12</b> <b>FINISH</b> <b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>WH</b> White <b>CU</b> Custom Custom finishes have longer lead times. Non-RAL 9003 whites custom.	<b>13</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".
		<b>14</b> <b>EXACT/OPTIMAL</b> <b>E</b> Exact specified length <b>O</b> Optimal illumination		


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




# MICRO 5 POP-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile



Profile with magnet clip



Profile with magnet clip and magnet mount accessory



Profile with plastic mounting clip

## 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with POP-03-RGB-4.0-RGB-ENC

	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT
TL	16	627	46	524	13	469	70

## 5 DIODE VISIBILITY



ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

## TEMPERATURE RATINGS


	4.0 W/FT	
	Min	Max
Ambient Operating Temp - Recessed	-4°F	100°F

## 6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)




End Feed



Bottom Feed




End Feed




Bottom Feed


ASYMMETRIC ONLY PASS THROUGH (Input/Output)




End Feed



End Feed



Bottom Feed




Bottom Feed



# MICRO 5 POP-ENCAPSULATED (03) RGB


24VDC Linear Fixtures - Surface & Recessed

## CONFIGURATION OPTIONS

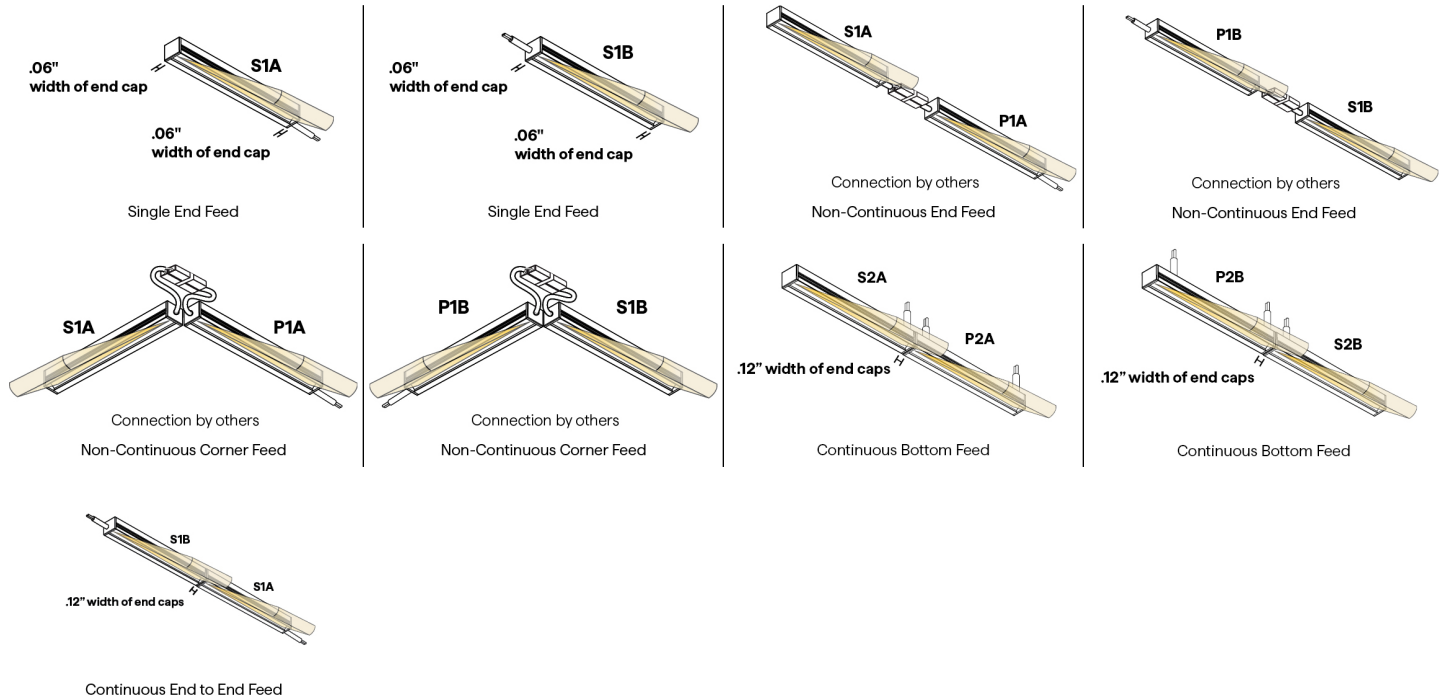

## 7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

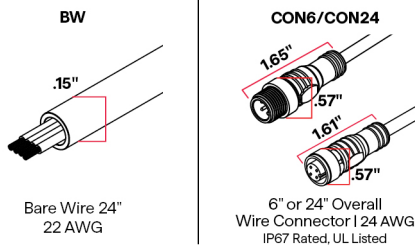

## 9 WIRE COLOR






# MICRO 5 POP-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

## 11 MOUNTING

MG	PL	832	MMA-05
Magnet Clip	Plastic Clip	832 Silicone	Magnet Mount Accessory for MG-05
One MG provided per foot To order separately use MG-05	2 clips provided for 4' or less; 4 clips provided for greater than 4'  To order separately use PLC-16  Each clip comes with a #6x1/4" and #6x1/2" Flat Head SS	Sold separately	Sold separately, to order use MMA-05  Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot  Required when mounting to a non-magnetic surface

## 12 FINISH




Custom finishes require a longer lead time, consult factory

## 15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

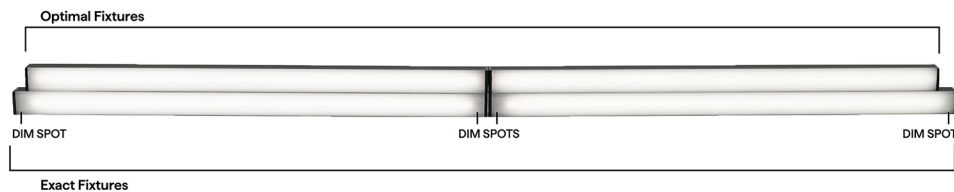



# MICRO 5 POP-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

## RGB ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH


Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	S1	S2	P1	P2
				
12"	10.50"		10.75"	
13"	12.50"		12.75"	
14"	12.50"		12.75"	
15"	14.50"		14.75"	
16"	14.50"		14.75"	
17"	16.50"		16.75"	
18"	16.50"		16.75"	
19"	18.50"		18.75"	
20"	18.50"		18.75"	
21"	20.50"		20.75"	
22"	20.50"		20.75"	
23"	22.50"		22.75"	
24"	22.50"		22.75"	
36"	34.50"		34.75"	
48"	46.50"		46.75"	
60"	58.50"		58.75"	
72"	70.50"		70.75"	
84"	82.50"		82.75"	
96"	94.50"		94.75"	

14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

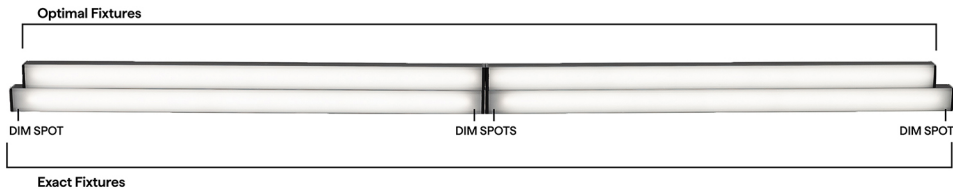

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	




# MICRO 5 POP-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature  
junction box, DRY/DMP  
(WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage