




UL-28

120VAC PAR20 35W Halogen/11W LED Up Light



UL-28 Shown in Bronze Texture Powder Coat Finish (BZT)

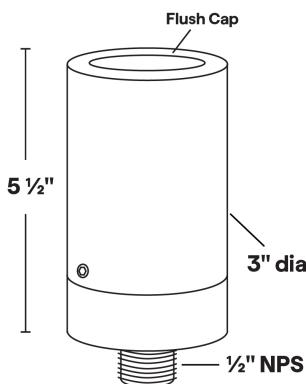

Dimensions: 3" dia. x 5 1/2"

- Flush lens cap; holds up to two accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/11W LED
- Input Voltage: 120VAC
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed uplighting applications. Can be utilized for ground mounted or surface mounted installations.

1 PRODUCT	2 MATERIAL	3 FINISH
UL-28	A	

Sample Part Number: **UL-28-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
UL-28	A Aluminum	<p>BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White</p>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



UL-28

120VAC PAR20 35W Halogen/11W LED Up Light

1 PRODUCT - DIMENSIONS




2 MATERIAL



Aluminum

3 FINISH

Eight Standard TGIC Free powder coat finishes available

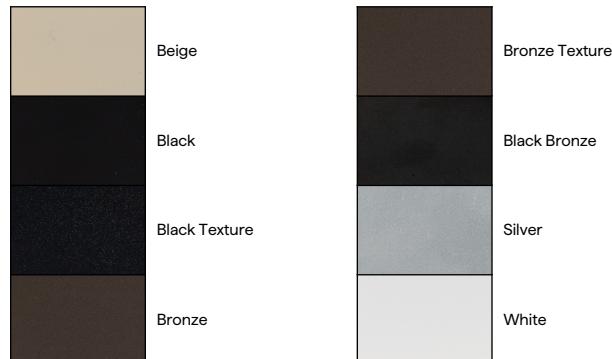

ACCESSORIES - LENS

Holds up to two accessories



Spread Lens



To order separately
use AY-1-PAR20-2




To order separately
use AY-1-PAR20-3



To order separately
use AY-1-PAR20-4



To order separately
use AY-1-PAR20-5



To order separately
use AY-1-PAR20-6



UL-28

120VAC PAR20 35W Halogen/11W LED Up Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately



LAMPS

PAR20 Halogen or LED; Medium base ceramic
Maximum wattage: 35W Halogen/11W LED

