




UL-29

120VAC PAR20 35W Halogen/11W LED Up Light

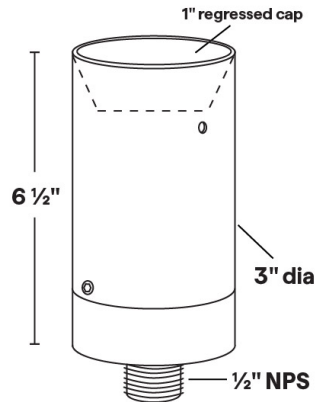

- 1" regressed lens cap; holds up to two accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10' of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/11W LED
- Input Voltage: 120VAC
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed uplighting applications. Can be utilized for ground mounted or surface mounted installations.

UL-29 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 3" dia. x 6 1/2"

1	2	3
PRODUCT	MATERIAL	FINISH
UL-29	A	

Sample Part Number: UL-29-A-BK

1	2	3
PRODUCT	MATERIAL	FINISH
UL-29	A Aluminum	<div><div>BG</div>Beige</div> <div><div>BB</div>Black Bronze</div> <div><div>BK</div>Black</div> <div><div>BKT</div>Black Texture</div> <div><div>BZ</div>Bronze</div> <div><div>BZT</div>Bronze Texture</div> <div><div>SL</div>Silver</div> <div><div>WH</div>White</div>

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




UL-29

120VAC PAR20 35W Halogen/11W LED Up Light

1

PRODUCT - DIMENSIONS



2

MATERIAL




Aluminum

3

FINISH

Eight Standard TGIC Free powder coat finishes available

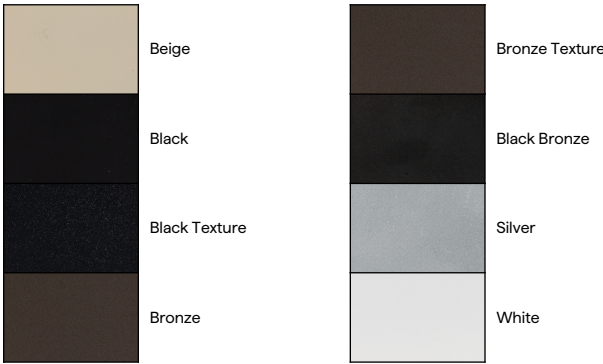

ACCESSORIES - LENS

Holds up to two accessories

SP	LI	SO	LV	WI	FR
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-PAR20-1	To order separately use AY-1-PAR20-2	To order separately use AY-1-PAR20-3	To order separately use AY-1-PAR20-4	To order separately use AY-1-PAR20-5	To order separately use AY-1-PAR20-6







UL-29

120VAC PAR20 35W Halogen/11W LED Up Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately

<p>MT-44</p>  <p>4/0 Machined Junction Box/Cover</p>	<p>MT-25</p>  <p>Round 4/0 Junction Box Cover</p>	<p>MT-26</p>  <p>Square 4/0 Junction Box Cover</p>	<p>MT-27</p>  <p>Round 3/0 Junction Box Cover</p>
-------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------

LAMPS

PAR20 Halogen or LED; Medium base ceramic
Maximum wattage: 35W Halogen/11W LED

<p>PAR20</p>  <p>SORAA VIVID 11.0W</p>	<p>PAR20</p>  <p>SORAA BRILLIANT 8.5W, 11.0W</p>
-----------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------