

MICRO 5 POP MUD-IN-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed





- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Asymmetric fixture with an 80° focused beam 20° off-nadir
- Once installed, its wings are covered with tape and compound to create a seamless look
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

ORDERING PROCESS

(A) Specify LED Fixture

(B) Specify MUD-IN Housing

A. LED FIXTURE

A1 PRODUCT	A2 WATTS/FT	A3 CCT	A4 RATED	A5 LENS	A6 WIRE INPUT/ OUTPUT	A7 CONNECTOR/ WIRE IN	A8 CONNECTOR/ WIRE OUT	A9 WIRE COLOR	A10 WIRE TYPE	A11 MOUNTING	A12 FINISH	A13 LENGTH (IN)	A14 EXACT/ OPTIMAL
	2.0		ENC	TL									

Sample Part Number: **POP-MD-03-DW-2.0-24/30-ENC-TL-S1A-BW-CLS-WH-CL2-SP-ST-48"-E**

A1 PRODUCT

POP-MD-03-DW
POP-MD-03-DW-USA

Select USA option for BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

A2 WATTS/FT

2.0	2.0W/ft

A3 CCT

22/30	2200K/3000K
22/35	2200K/3500K
24/30	2400K/3000K
24/40	2400K/4000K
27/40	2700K/4000K

A4 RATED

ENC	IP67

A5 LENS

TL	Translucent

For representation of LED visibility, see Diode Visibility section on following pages.For beam angles, see Photometric Performance section on following pages

A6 WIRE INPUT/OUTPUT

S1A	Single 1 (Input only) - End Feed
S1B	Single 1 (Input only) - End Feed
S2A	Single 2 (Input only) - Bottom Feed
S2B	Single 2 (Input only) - Bottom Feed

For continuous mounting, consider bottom feed.

P1A	Pass Through 1 (Input/output) - End Feed
P1B	Pass Through 1 (Input/output) - End Feed
P2A	Pass Through 2 (Input/output) - Bottom Feed
P2B	Pass Through 2 (Input/output) - Bottom Feed

For continuous mounting, consider bottom feed.

A7 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW	Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A8 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)

BW	Bare Wire (Standard 24")

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9 WIRE COLOR

WH	White
BK	Black

A10 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)

A11 MOUNTING

SC	Screw
SP	Spring Clip

For either mounting option POP-MD-MNT-KIT is required for mounting POP into the Mud-In Channel

A12 FINISH

ST	Satin
BK	Black
BZ	Bronze
WH	White
CU	Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

A13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

A14 EXACT/OPTIMAL

E	Exact specified length
O	Optimal illumination

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

MICRO 5 POP MUD-IN-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

B. MUD-IN HOUSING

B1 PRODUCT	B2 LENGTH
POP-MD	

Sample Part Number: **POP-MD-FCN**

B1 PRODUCT

POP-MD

B2 LENGTH

FCN	Field Cuttable
CTL	Cut to Length


Full length 98.43" housings will be sent for field cuttable specifications. Quantity will be determined by dividing the POP fixture measurements by 98.43 and rounding up.
Cut to length housing specifications will be the length of the POP fixture specified, plus .125" for endcaps.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP MUD-IN-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


A1 PRODUCT - DIMENSIONS




Profile



Profile with mud-in accessory




Profile with mud-in accessory and spring clip



Profile with mud-in accessory and spring clip


END CAPS

Flat end caps



Feed

To order separately, use POP-EC-MDIN-A-ST



Feed

To order separately, use POP-EC-MDIN-B-ST

A2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with POP-03-DW-2.0-**-ENC

	3000K	
	LM/FT	CRI
TL	60	95

A5 DIODE VISIBILITY

ENC/TL - Translucent encapsulation

TEMPERATURE RATINGS

	DW 2.0 W/FT		DW 4.0 W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max
Ambient Operating Temp - Recessed	-4°F	120°F	-4°F	100°F


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP MUD-IN-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


A6 WIRE INPUT/OUTPUT

ASYMMETRIC ONLY SINGLE (Input only)

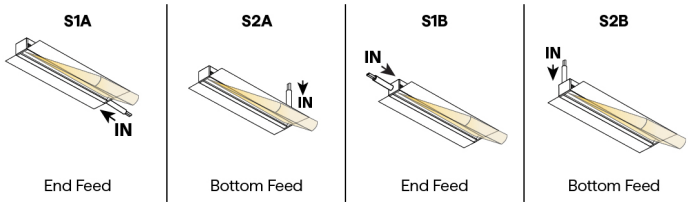


End Feed | Bottom Feed | End Feed | Bottom Feed

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

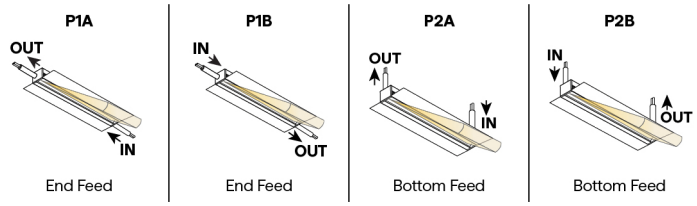


End Feed | End Feed | Bottom Feed | Bottom Feed


CONFIGURATION OPTIONS



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Connection by others


Non-Continuous Corner Feed



Continuous Bottom Feed




Continuous Bottom Feed



Continuous End to End Feed

A7 / A8 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



Bare Wire 24"
22 AWG

A9 WIRE COLOR

White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26

MICRO 5 POP MUD-IN-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

A11 MOUNTING

POP-MD-MNT-KIT




Plastic Clip Kit

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use POP-MD-MNT-KIT

Each clip comes with a #4 x 3/16 Flat Head SS" and two #6 x 1/8" long set screws

SP



Spring Clip

Only to be used with mud-in accessory

4 clips provided for each full length of MUD-IN

To order separately use SP-02


832



832 Silicone

Sold separately

SC



Screw

6 #6x1.75" flat head screws are provided for each full length of MUD-IN

A12 FINISH



Satin

Black


Bronze

White

Custom finishes require a longer lead time, consult factory

A14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

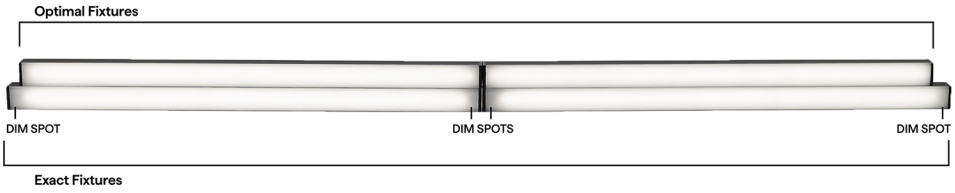


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP MUD-IN-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS





24VDC Linear Fixtures - Recessed

DW ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
				
12"	10.50"		10.75"	
13"	12.50"		12.75"	
14"	12.50"		12.75"	
15"	14.50"		14.75"	
16"	14.50"		14.75"	
17"	16.50"		16.75"	
18"	16.50"		16.75"	
19"	18.50"		18.75"	
20"	18.50"		18.75"	
21"	20.50"		20.75"	
22"	20.50"		20.75"	
23"	22.50"		22.75"	
24"	22.50"		22.75"	
36"	34.50"		34.75"	
48"	46.50"		46.75"	
60"	58.50"		58.75"	
72"	70.50"		70.75"	
84"	82.50"		82.75"	
96"	94.50"		94.75"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-DW Warm Dim Applications	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS QOM-eLED+DALI-DT8 QOM-eLED+DALI-DT8-PS QOM-eLED+WD QZ-DMX QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP MUD-IN-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-DW Warm Dim Applications	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved