




## UL-3

### 12V UL-3 Up Light

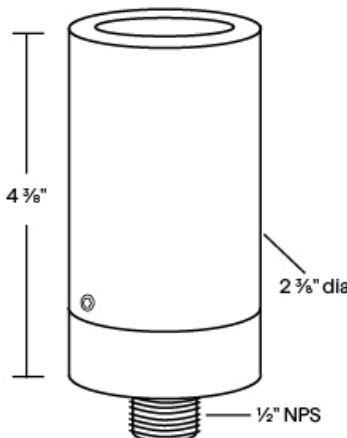

UL-3 Shown in Bronze Powder Coat Finish (BZ)

Weight: .10 lbs  
Dimensions: 2 3/8" dia. x 4 3/8" long

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for up lighting or down lighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

1 PRODUCT	2 MATERIAL	3 FINISH
UL-3	A	

Sample Part Number: **UL-3-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
UL-3	A 6061 - T6 Aluminum	<b>AC</b> Aged Copper <b>BG</b> Beige <b>BK</b> Black <b>BKT</b> Black Texture <b>BZ</b> Bronze <b>BZT</b> Bronze Texture <b>CA</b> Clear Anodized <b>SL</b> Silver <b>WH</b> White

10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

10 YEAR  
WARRANTY  
ALUMINUM

MADE IN AMERICA  
FROM DOMESTIC &  
FOREIGN PARTS


UL  
1838 LISTED



## UL-3

### 12V UL-3 Up Light

#### 1 PRODUCT - DIMENSIONS

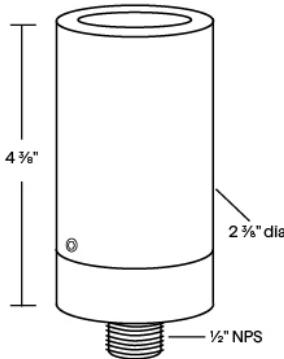

#### 2 MATERIAL



6061 - T6 Aluminum

#### 3 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



#### ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR16-BL	To order separately use AY-2-MR16-LB	To order separately use AY-2-MR16-PK	To order separately use AY-2-MR16-AM	To order separately use AY-2-MR16-MV	To order separately use AY-2-MR16-RD	To order separately use AY-2-MR16-GR	To order separately use AY-2-MR16-DA




## UL-3

### 12V UL-3 Up Light

#### ACCESSORIES - LENS

Holds up to three accessories

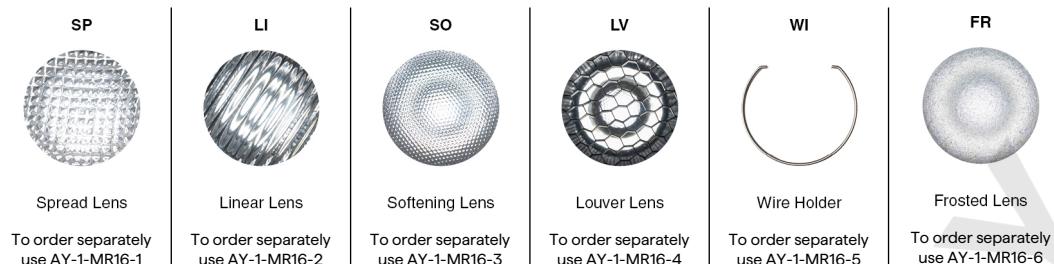

#### ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



#### LAMPS

MR16 Halogen or LED; GY-6.35 Bi-Pin Porcelain  
Maximum wattage: 35 Watt, 8 Watt LED



#### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS