

MICRO 5 POP FLANGE-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed





- MICRO 5 Series linear LED flanged fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Asymmetric fixture with a 75° focused beam 20° off-nadir
- Features high-quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation is available in translucent
- Suitable for indoor and outdoor locations
- Ideal for recessed installations that call for low-profile light in small areas
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS	6 WIRE INPUT/ OUTPUT	7 CONNECTOR/ WIRE IN	8 CONNECTOR/ WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/ OPTIMAL
	2.0		ENC	TL									

Sample Part Number: **POPF-03-DW-2.0-24/30-ENC-TL-S1A-BW-CLS-WH-CL2-MG-ST-48"-E**

1 PRODUCT

POPF-03-DW
POPF-03-DW-USA

Select USA option for BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

2 WATTS/FT

2.0	2.0W/ft

3 CCT

22/30	2200K/3000K
22/35	2200K/3500K
24/30	2400K/3000K
24/40	2400K/4000K
27/40	2700K/4000K

4 RATED

ENC	IP67

5 LENS

TL	Translucent

For representation of LED visibility, see Diode Visibility section on following pages.For beam angles, see Photometric Performance section on following pages

6 WIRE INPUT/OUTPUT

S1A	Single 1 (Input only) - End Feed
S1B	Single 1 (Input only) - End Feed
S2A	Single 2 (Input only) - Bottom Feed
S2B	Single 2 (Input only) - Bottom Feed

For continuous mounting, consider bottom feed.

P1A	Pass Through 1 (Input/output) - End Feed
P1B	Pass Through 1 (Input/output) - End Feed
P2A	Pass Through 2 (Input/output) - Bottom Feed
P2B	Pass Through 2 (Input/output) - Bottom Feed

For continuous mounting, consider bottom feed.

7 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 24")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW	Bare Wire (Standard 24")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

8 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)

BW	Bare Wire (Standard 24")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 WIRE COLOR

WH	White
BK	Black

10 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated

CL2P only available with bare wire leads (BW)

11 MOUNTING

MG	Magnet
832	832 Silicone
SP	Spring Clip
PL	Plastic Clip

12 FINISH

ST	Satin
BK	Black
BZ	Bronze
WH	White
CU	Custom

Custom finishes have longer lead times. Non-RAL 9003 whites custom.

13 LENGTH (IN)

Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".

14 EXACT/OPTIMAL

E	Exact specified length
O	Optimal illumination

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP FLANGE-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


1 PRODUCT - DIMENSIONS




Profile with magnet clip



Profile with magnet clip and magnet mount accessory



Profile with plastic clip



Profile with spring clip

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with POPF-03-DW-2.0-**-ENC

	3000K	
	LM/FT	CRI
TL	58	95

5 DIODE VISIBILITY


ENC/TL - Translucent encapsulation

TEMPERATURE RATINGS


	DW 2.0 W/FT		DW 4.0 W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max
Ambient Operating Temp - Recessed	-4°F	120°F	-4°F	100°F

6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)




End Feed



Bottom Feed




End Feed




Bottom Feed


ASYMMETRIC ONLY PASS THROUGH (Input/Output)




End Feed



End Feed



Bottom Feed




Bottom Feed

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP FLANGE-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


CONFIGURATION OPTIONS



Single End Feed




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Connection by others


Non-Continuous Corner Feed



Non-Continuous Bottom Feed




Non-Continuous Bottom Feed




Non-Continuous End to End Feed

7/8 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out




Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

9 WIRE COLOR



White

Black


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP FLANGE-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

11 MOUNTING

MG




Magnet Clip

One MG provided per foot

To order separately use MG-05

PL




Plastic Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use PLC-16

Each clip comes with a #6x1/4" and #6x1/2" Flat Head SS

SP



Spring Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SP-02


832



832 Silicone

Sold separately

MMA-05



Magnet Mount Accessory for MG-05

Sold separately, to order use MMA-05

Each bracket comes with 2 #6 x 5/8" Flat Head SS per foot

Required when mounting to a non-magnetic surface

12 FINISH



Satin

Black

Bronze

White


Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

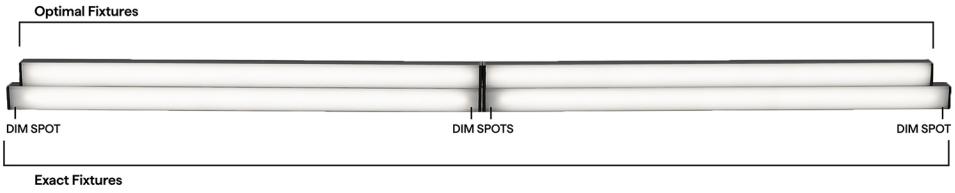


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

MICRO 5 POP FLANGE-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS





24VDC Linear Fixtures - Recessed

DW ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed
12"	10.50"		10.75"	
13"	12.50"		12.75"	
14"	12.50"		12.75"	
15"	14.50"		14.75"	
16"	14.50"		14.75"	
17"	16.50"		16.75"	
18"	16.50"		16.75"	
19"	18.50"		18.75"	
20"	18.50"		18.75"	
21"	20.50"		20.75"	
22"	20.50"		20.75"	
23"	22.50"		22.75"	
24"	22.50"		22.75"	
36"	34.50"		34.75"	
48"	46.50"		46.75"	
60"	58.50"		58.75"	
72"	70.50"		70.75"	
84"	82.50"		82.75"	
96"	94.50"		94.75"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-DW Warm Dim Applications	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS QOM-eLED+DALI-DT8 QOM-eLED+DALI-DT8-PS QOM-eLED+WD QZ-DMX QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


MICRO 5 POP FLANGE-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-DW Warm Dim Applications	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26