





# OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed



- Choose from 9 lens options: 40°, 60°, 70°, 90°, 110°, 155°, 180°, Asymmetric, & Forward Throw
- Delivers smooth and consistent light to highlight architectural features and surfaces
- Ideal for surface-mounted or recessed installations
- Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
- When using DALI and DMX power supplies, LED wattage must be doubled



1	2	3	4	5	6	7	8	9	10	11	12	13	14
PRODUCT	WATTS/ FT	CCT	RATED	LENS	WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **OP2DW-2.5HE-20/30-DRY-155D-P1-CON6-CON6-WH-CL2-CC-WH-48"-E**

<b>1</b> <b>PRODUCT</b> <b>OP2DW</b> <b>OP2DW-USA</b>  Select USA option for BAA and BABA projects.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE <b>4.0HE</b> 4.0W/ft HE  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>3</b> <b>CCT</b>  <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K  <b>18/30</b> 1800K/3000K <b>18/35</b> 1800K/3500K <b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>24/40</b> 2400K/4000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K	<b>4</b> <b>RATED</b>  <b>DRY</b> IP20  <b>DMP</b> IP54	<b>5</b> <b>LENS</b>  <b>40D</b> Optical 40° <b>60D</b> Optical 60° <b>70D</b> Optical 70° <b>90D</b> Optical 90° <b>110D</b> Optical 110° <b>155D</b> Optical 155° <b>180D</b> Optical 180°  <b>ASYM</b> Asymmetric <b>FT</b> Forward Throw  40D, 60D, 70D, 90D, 110D, 155D, 180D, and ASYM are offered in 44.9" lengths. For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	<b>6</b> <b>WIRE INPUT/OUTPUT</b>  <b>S1</b> Single 1 (Input only) - End Feed <b>S2</b> Single 2 (Input only) - Bottom Feed  <b>P1</b> Pass Through 1 (Input/output) - End Feed <b>P2</b> Pass Through 2 (Input/output) - Bottom Feed  <b>S1A</b> Single 1 (Input only) - End Feed <b>S1B</b> Single 1 (Input only) - End Feed <b>S2A</b> Single 2 (Input only) - Bottom Feed <b>S2B</b> Single 2 (Input only) - Bottom Feed  <b>P1A</b> Pass Through 1 (Input/output) - End Feed <b>P1B</b> Pass Through 1 (Input/output) - End Feed <b>P2A</b> Pass Through 2 (Input/output) - Bottom Feed <b>P2B</b> Pass Through 2 (Input/output) - Bottom Feed	<b>7</b> <b>CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>8</b> <b>CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>CLS</b> Closed End (No feed)  <b>BW</b> Bare Wire (Standard 36") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>9</b> <b>WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black	<b>10</b> <b>WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)	<b>11</b> <b>MOUNTING</b>  <b>CC</b> Concealed Clip <b>MG</b> Magnet	<b>12</b> <b>FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>WH</b> White <b>CU</b> Custom  Custom finishes have longer lead times. Non-RAL 9003 whites custom.	<b>13</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	<b>14</b> <b>EXACT/OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

For continuous mounting, consider bottom feed.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




# OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnet clip




Profile with magnet mount clip and magnet mount accessory




Profile with 40D lens




Profile with 60D lens




Profile with 70D lens




Profile with 90D lens




Profile with 110D lens




Profile with 155D lens



Profile with 180D lens



Profile with asymmetric lens



Profile with forward throw lens

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with OP2DW-2.5HE-\*\*-DRY-STD


	3000K	
	LM/FT	CRI
40D	262	98
60D	246	98
70D	251	98
90D	249	98
110D	240	98
155D	243	98
180D	245	98
ASYM	245	98
FT	213	98



# OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 5 DIODE VISIBILITY

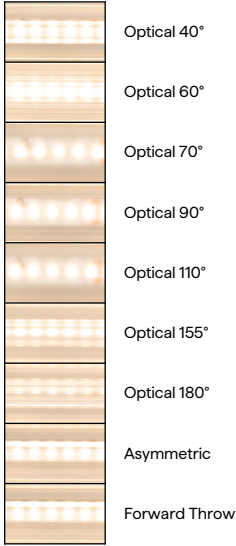


## TEMPERATURE RATINGS

		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	115°F

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

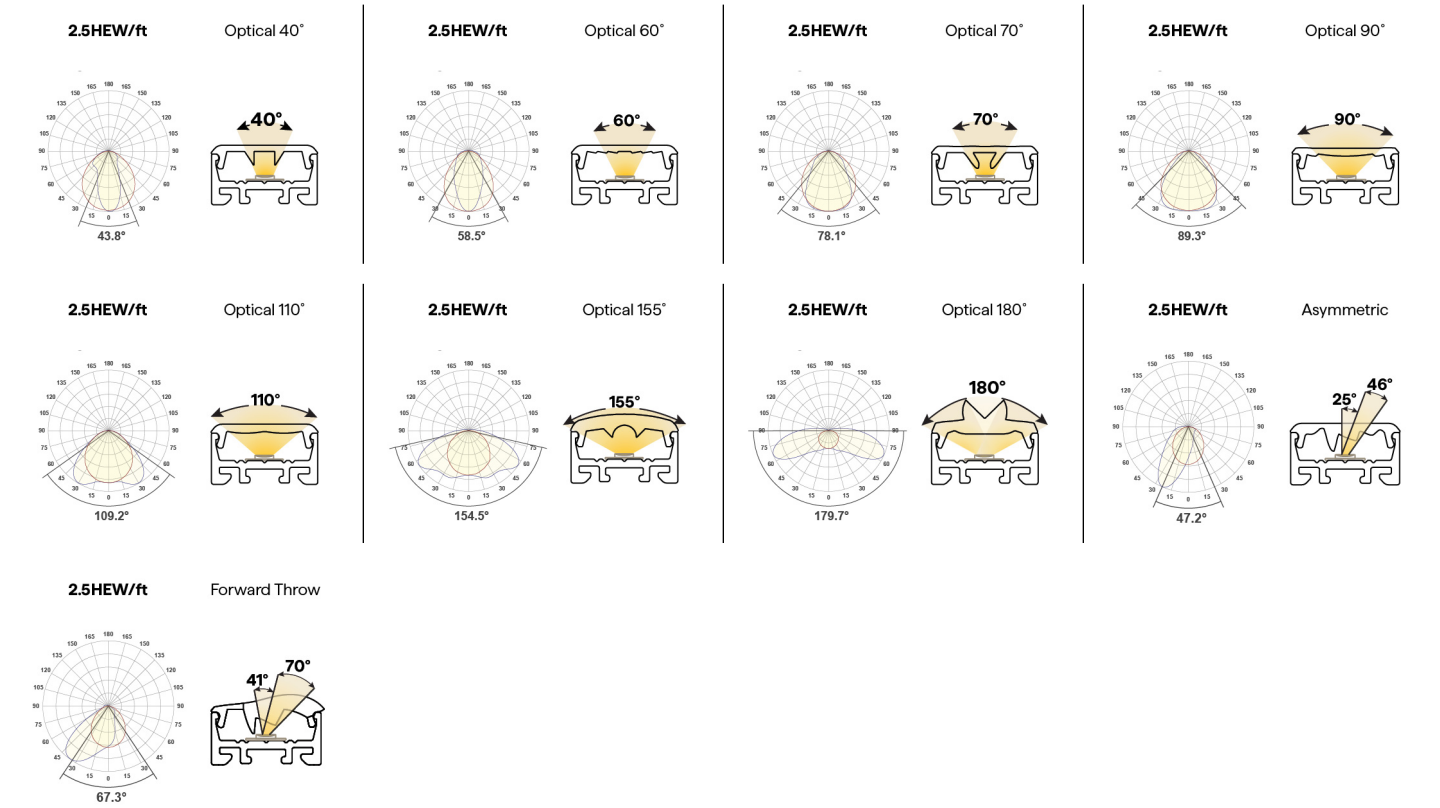




# OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 6 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




ASYMMETRIC ONLY SINGLE (Input only)

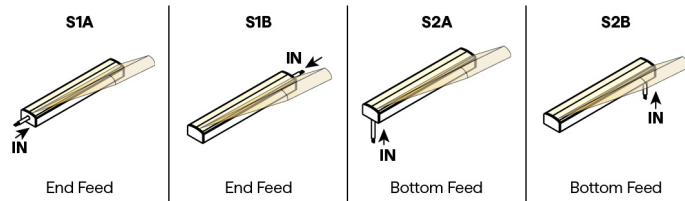

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

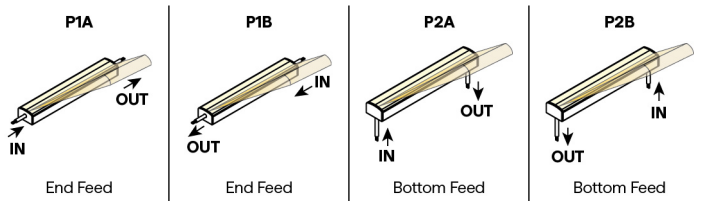

## CONFIGURATION OPTIONS

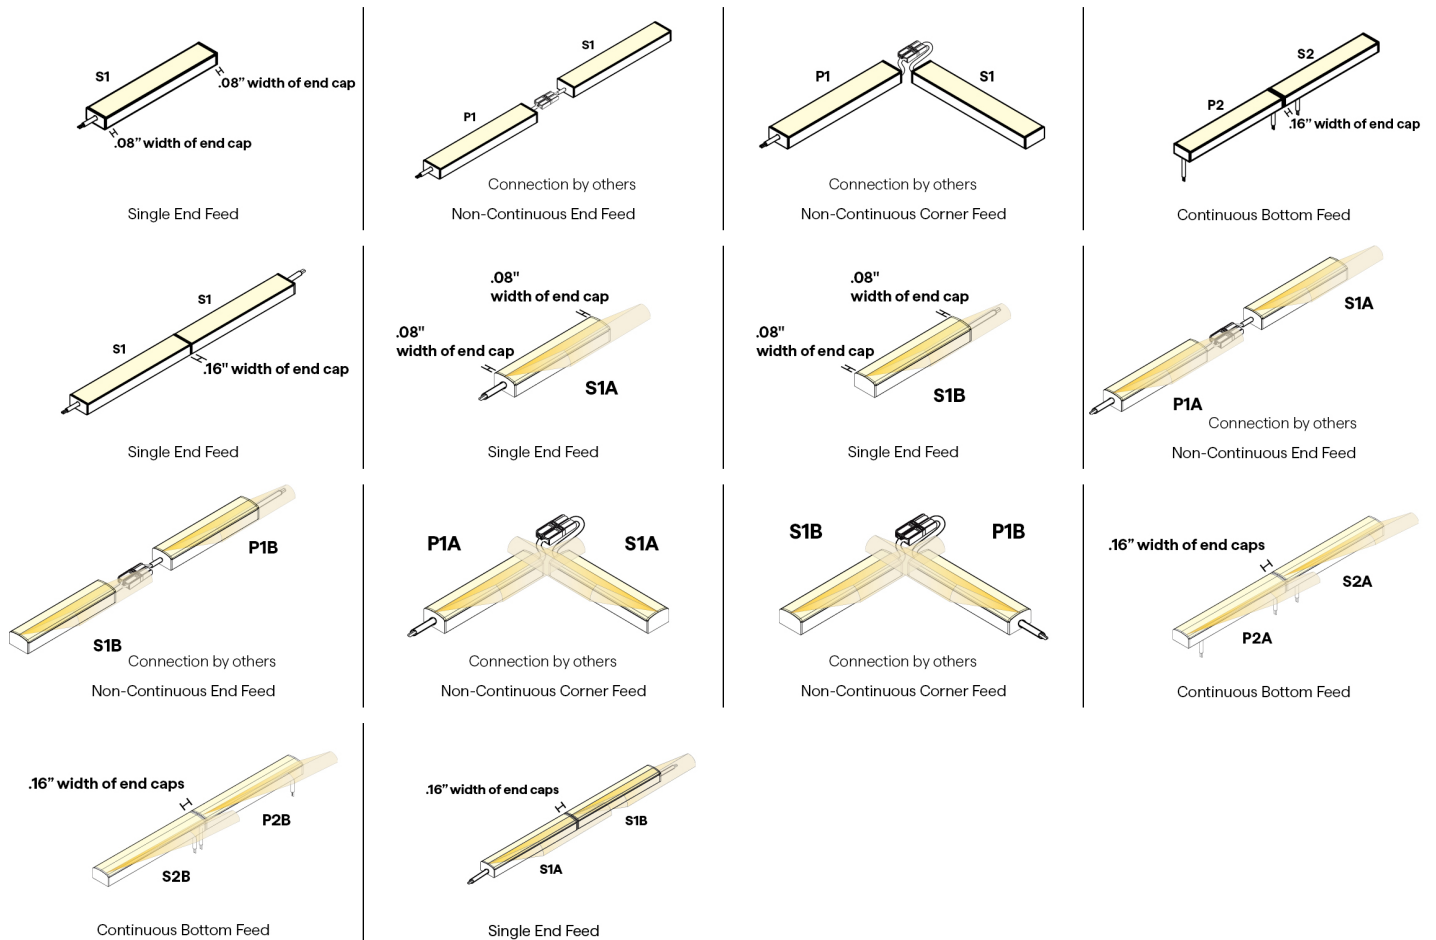




# OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 7 / 8 CONNECTOR/WIRE - IN/OUT

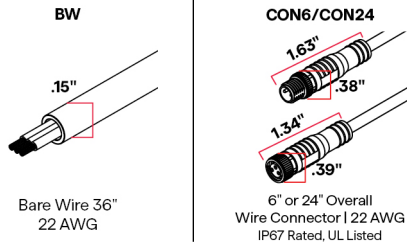

## 9 WIRE COLOR



## 11 MOUNTING

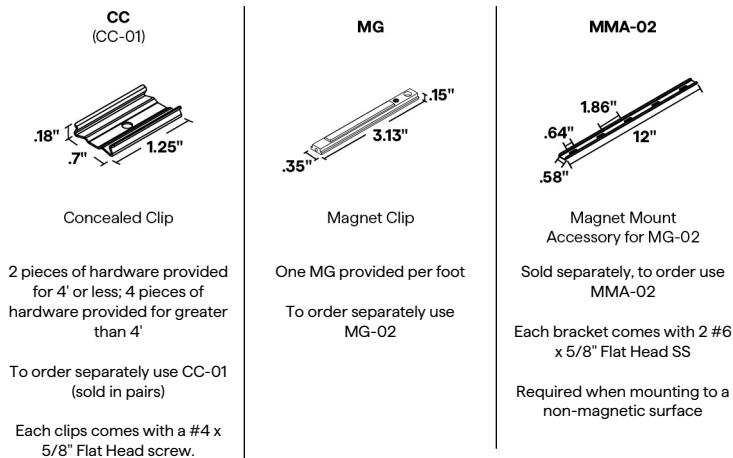


## 12 FINISH



Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

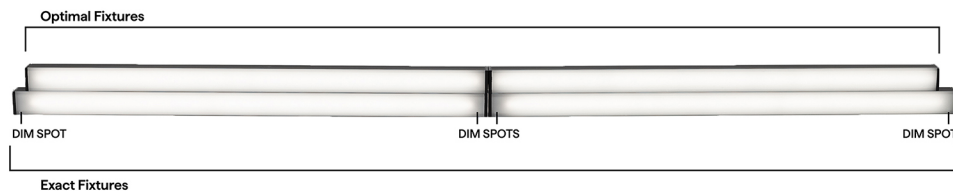




# OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed





### DW-HE DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S1A/B & S2 & S2A/B		P1 & P1A/B & P2 & P2A/B	
	 S1 End Feed	 S2 Bottom Feed	 P1 End Feed	 P2 Bottom Feed
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle



# OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

### COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M

Adjustable mounting bracket - Medium

HINGE - HMB-L

Adjustable mounting bracket - Large

HINGE - HMB-XL

Adjustable mounting bracket - XLarge

Q-PIVOT

Small mounting accessory

Q-ANGLE

Adjustable mounting accessory

QUOVA-STANDARD

QUOVA Knife Edge

NJ-LARGE

J Mounting Bracket

NU-LARGE

U Mounting Bracket

SD-J-LARGE

J Mounting Bracket

BL-LARGE

Backwards L Mounting Bracket

NL-LARGE

L Mounting Bracket

SD-L-LARGE

L Mounting Bracket

MMA-02

Magnet Mount Accessory of MG-02

### COMPATIBLE WIRING ACCESSORIES

Q-mini-J5

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)



## OPTI-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

---

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage