




# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Seven different mounting options
- Available in a seamless configuration for a continuous line of light
- Utilize clear endcaps for continuous runs
- Pair with ZALA's side bend to achieve compound curves
- When using DALI and DMX power supplies, LED wattage must be doubled
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures
- IK10 impact rated

## ORDERING PROCESS

**A** Specify Non-Field Cuttable Q-CAP

**B** (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

## A. NON-FIELD CUTTABLE Q-CAP

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	END CAPS	LENGTH (IN)	EXACT/OPTIMAL

Sample Part Number: **BOXA-DW-PPS-2-DRY-24/30-1.5HE-ENC-TL-P1-BW-BW-N/A-48"-E**

A1

PRODUCT

BOXA-DW

BOXA-DW-USA

Select USA option for BA, BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.

A2

MOUNTING

RLC

MC

SGC

PPS-2

PPS-96

PPS-LP-2

PPS-LP-96

WSC

BN-UD-SST-16'

BN-UD-SST-32'

BN-UD-WH-16'

BN-UD-WH-32'

Rigid Lock Channel

Magnetic Clip

Side Graze Channel

PVC Clip

PVC Channel

PVC Low Profile Clip

PVC Low Profile Channel

White Snug Clip

16' BENDIT Up/Down Stainless Steel Channel

32' BENDIT Up/Down Stainless Steel Channel

16' BENDIT Up/Down White Stainless Channel

32' BENDIT Up/Down White Stainless Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

PPS mounting clip recommended for seamless applications

A3

RATED

DRY

WET

IP20

IP67

A4

CCT

24/30

27/40

2400K/3000K

2700K/4000K

A5

WATTAGE

1.5HE

2.5HE

1.5WHE-SO

2.5WHE-HO

SO: Standard Output

HO: High Output

A6

LENS

ENC/CL

ENC/TL

Encapsulated in Clear

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

A7

WIRE INPUT/OUTPUT

S1

S2

S3

S4

S5

Single 1 (Input only) - End Feed

Single 2 (Input only) - Bottom Feed

Single 3 (Input only) - Left Side Feed

Single 4 (Input only) - Right Side Feed

Single 5 (Input only) - Seamless Feed

P1

P2

P3

P4

P5

Pass Through 1 (Input/Output) - End Feed

Pass Through 2 (Input/Output) - Bottom Feed

Pass Through 3 (Input/Output) - Left Side Feed

Pass Through 4 (Input/Output) - Right Side Feed

Pass Through 5 (Input/Output) - Seamless Feed

A8

CONNECTOR/WIRE IN

BW

CON6

CON24

Bare Wire (Standard 24")

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW

CON6

CON24

Bare Wire (Standard 24")

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

BW

CON6

CON24

Bare Wire (Standard 24")

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A10

END CAPS

CL

WH

Clear

White

N/A

Not Applicable

A11

LENGTH (IN)

Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.

A12

EXACT/OPTIMAL

O

E

Optimal Illumination

Exact Specified Length

Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

5 year warranty | Warranty only valid with QTL power supplies | Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Ambient or mounting surface must not be lower than -4°F or higher than: 1.5HE - 125°F; 2.5HE - 115°F | Patent # D872,931 S, D847,395 S, 10,619,828 B2 | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut







# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures


## 1 PRODUCT - DIMENSIONS



Profile  
(Standard)




Profile  
(Seamless bare wire)



Profile  
(CON6-24 barrel)


## BEND RADIUS

### Up/Down Bend



6" bending radius

## FLEXIBILITY

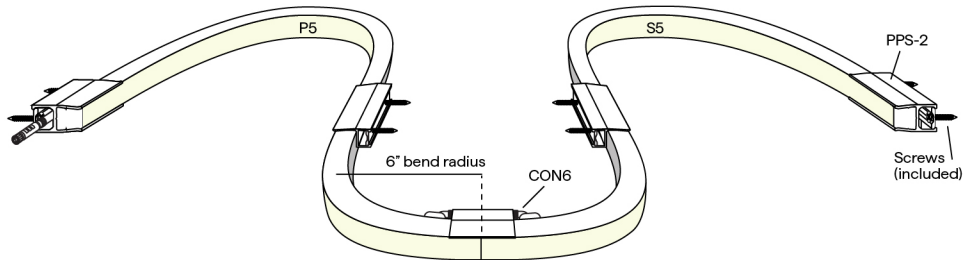

## 2 MOUNTING

### WSC



White Snug Clip  
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

### RLC



Rigid Lock Channel

To order separately use RLC

Each clip comes with a #6x5/8" flat screw

### MC



Magnetic Clip  
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw

### SGC




Side Graze Clip

To order separately use SGC

Each clip comes with a #6x5/8" flat screw

### PPS-2



PVC Mounting Clip

To order separately use BOXA-PPS2



# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS

## 24VDC Flexible Fixtures

### MOUNTING CONTINUED

**PPS-96**

96" straight linear run

To order separately use BOXA-PPS-96

Each clip comes with a #8" flat screw

**PPS-LP-2**

Low profile PVC Mounting Clip

To order separately use BOXA-PPS-LP-2

**PPS-LP-96**

Low profile PVC channel 96" straight linear run

To order separately use BOXA-PPS-LP-96

Each clip comes with a #8" flat screw

**BN-UD**

BENDIT Channel  
Vertical Stainless Steel Flexible Channel

Continuous mounting solution for flexible fixtures, 16' or 32' field cuttable lengths

To order separately use either STND-QCAP-BN-UD-SST-16', STND-QCAP-BN-UD-SST-32', STND-QCAP-BN-UD-WH-16', or STND-QCAP-BN-UD-WH-32'

64 #4-40 1/2" screws provided per 16'

### 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with BOXA-DW-WSC-DRY

CCT	1.5HE W/FT				2.5HE W/FT			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	129	92	103	93	193	91	154	92
2700K	120	96	81	97	190	97	132	97
3000K	127	97	98	95	195	97	154	96
4000K	140	97	114	97	217	97	170	97

### 6 DIODE VISIBILITY

ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

### TEMPERATURE RATINGS

	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	140°F	-4°F	125°F	-4°F	125°F	-4°F	100°F
Storage Temp	-4°F	120°F	**	**	-4°F	120°F	**	**
Installation Temp	50°F	100°F	**	**	50°F	100°F	**	**

### BUG RATING

WATTAGE	B	U	G
1.5HE (ALL CCTs), 2.5HE (ALL CCTs)	B0	U1	G0




# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS


24VDC Flexible Fixtures

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

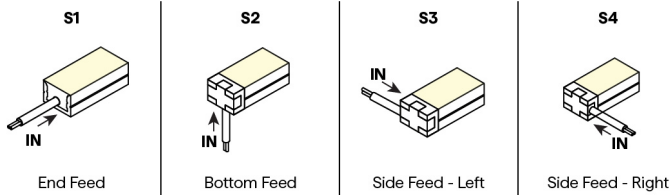


PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

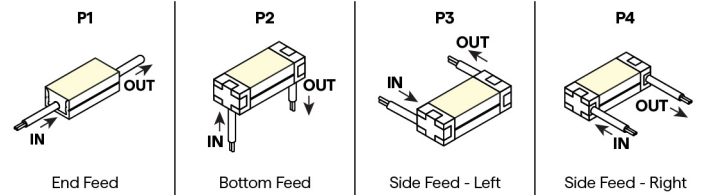


SEAMLESS SINGLE (Input only)




SEAMLESS PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP



## CONFIGURATION OPTIONS

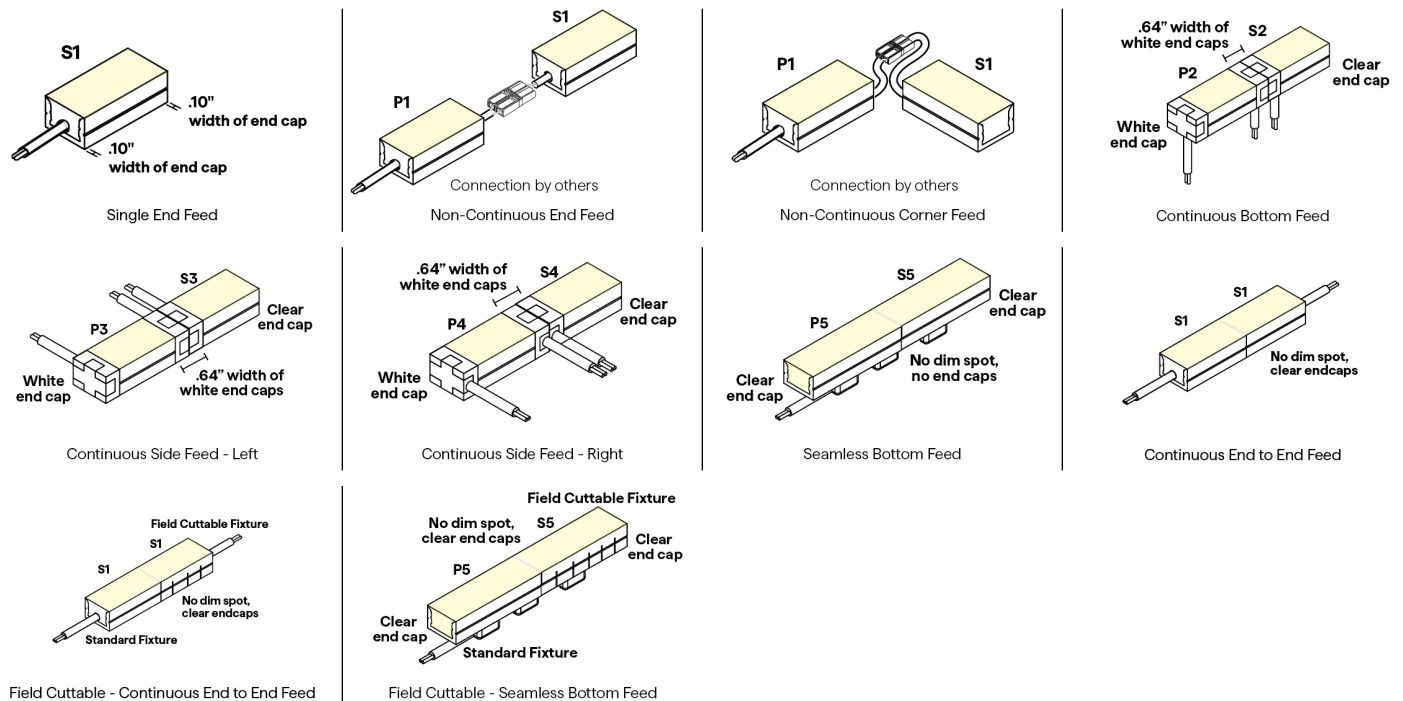

## FIELD CUTTABLE MARKING

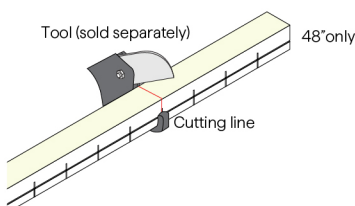

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures

## SEAMLESS


Shown with bare wire, connectors vary




Omnidirectional wireways  
S5, P5

## 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



## 10 END CAPS (NO FEED)



## END CAPS (WITH FEED)



## 11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"




## 12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

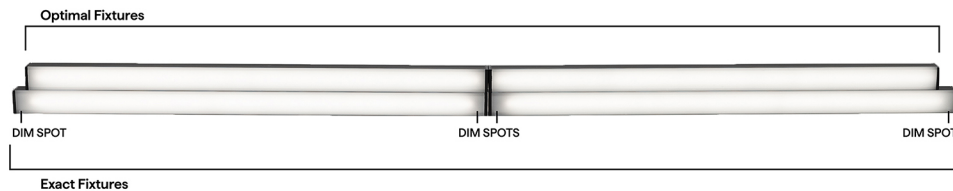



# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures











## DW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture with S1 wireway
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1		S2 & S3 & S4		P1	P2 & P3 & P4			S5 & P5	
	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 Seamless Feed	 Seamless Feed
12"	10.58"		10.85"		10.95"		11.5"		10.2"	
13"	12.58"		12.85"		12.95"		11.5"		12.2"	
14"	12.58"		12.85"		12.95"		13.5"		12.2"	
15"	14.58"		14.85"		14.95"		13.5"		14.2"	
16"	14.58"		14.85"		14.95"		15.5"		14.2"	
17"	16.58"		16.85"		16.95"		15.5"		16.2"	
18"	16.58"		16.85"		16.95"		17.5"		16.2"	
19"	18.58"		18.85"		18.95"		17.5"		18.2"	
20"	18.58"		18.85"		18.95"		19.5"		18.2"	
21"	20.58"		20.85"		20.95"		19.5"		20.2"	
22"	20.58"		20.85"		20.95"		21.5"		20.2"	
23"	22.58"		22.85"		22.95"		21.5"		22.2"	
24"	22.58"		22.85"		22.95"		23.5"		22.2"	
36"	34.58"		34.85"		34.95"		35.5"		34.2"	
48"	46.58"		46.85"		46.95"		47.5"		46.2"	
60"	58.58"		58.85"		58.95"		59.5"		58.2"	
72"	70.58"		70.85"		70.95"		71.5"		70.2"	
84"	82.58"		82.85"		82.95"		83.5"		82.2"	
96"	94.58"		94.85"		94.95"		95.5"		94.2"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	



# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

**Q-ANGLE**

Adjustable mounting accessory

**NJ-LARGE**

J Mounting Bracket

**NU-LARGE**

U Mounting Bracket

**SD-J-LARGE**

J Mounting Bracket

**BL-LARGE**

Backwards L Mounting Bracket

**NL-LARGE**

L Mounting Bracket

**SD-L-LARGE**

L Mounting Bracket

**IQ-QCAP-UNV-CUTTER**

QTL recommended FC Cutter

## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J5**

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**

Wi-Fi or Bluetooth Connectivity





# Q-CAP BOXA™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures

---

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage