





# Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

## B. FIELD CUTTABLE Q-CAP

B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT / OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	END CAPS	LENGTH (IN)	EXACT / OPTIMAL
LUME-01-FC-DW		DRY			ENC/TL	S1		N/A	TL	48"	N/A

Sample Part Number: LUME-01-DW-HE-MC-DRY-24/30-1.5HE-ENC/TL-P1-BW-BW-N/A-48"-E

B1

PRODUCT

LUME-01-FC-DW

LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.

B2

MOUNTING

MC

PPS-LP-CL-2

PPS-LP-CL-96

WSC

Magnetic Clip

Clear PVC Clip

Clear PVC Channel

White Snug Clip

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

B3

RATED

DRY IP20

B4

CCT

24/30

27/40

2400K/3000K

2700K/4000K

B5

WATTAGE

1.5HE

1.5WHE-SO

2.5HE

2.5WHE-HO

SO: Standard Output

HO: High Output

B6

LENS

ENC/TL

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

B7

WIRE INPUT/OUTPUT

S1

Single 1 (Input only) - End Feed

B8

CONNECTOR/WIRE IN

BW

CON6

CON24

Bare Wire (Standard 24")

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

B9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

B10

END CAPS

TL

Translucent

B11

LENGTH (IN)

48"

Nominal

Starting Run length is 48.475" for S1

Each cut point subtracts from the Starting Run Length

1.5HE & 2.5HE have a 2" cut point

S1 can be cut down to as little as 2.475"

B12

EXACT/OPTIMAL

N/A


Single ▶



# Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures


## 1 PRODUCT - DIMENSIONS



Profile  
(Standard)


### BEND RADIUS

Up/Down Bend




6" bending radius

### FLEXIBILITY

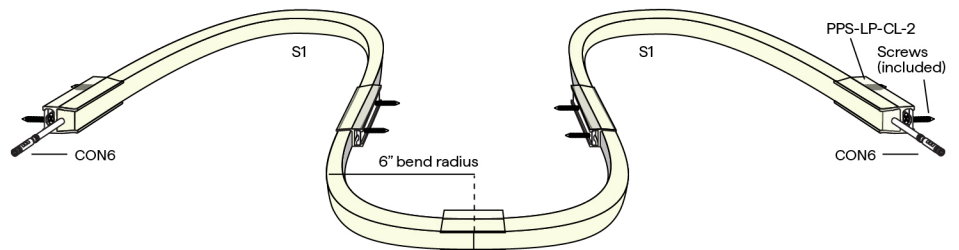

## 2 MOUNTING

WSC




White Snug Clip  
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

MC




Magnetic Clip  
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


PPS-LP-CL-2



Low profile PC Mounting  
Clip - Clear finish

To order separately use LUME-PPS-LP-CL-2

PPS-LP-CL-96



Low profile PC channel  
96" straight linear run  
Clear finish

To order separately use LUME-PPS-LP-CL-96

Each clip comes with a #8" flat screw

## 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with LUME-01-DW-WSC-DRY

CCT	15HE W/FT		25HE W/FT	
	ENC/TL		ENC/TL	
	LM	CRI	LM	CRI
2400K	90	93	121	92
2700K	64	97	133	97
3000K	**	**	**	**
4000K	**	**	**	**

## 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation



# Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

## 24VDC Flexible Fixtures

### TEMPERATURE RATINGS


	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	140°F	-4°F	125°F	-4°F	125°F	-4°F	100°F
Storage Temp	-4°F	140°F	**	**	-4°F	140°F	**	**
Installation Temp	50°F	100°F	**	**	50°F	100°F	**	**

### BUG RATING


WATTAGE	B	U	G
1.5HE (ALL CCTs), 2.5HE (ALL CCTs)	B0	U1	G0

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP



### CONFIGURATION OPTIONS

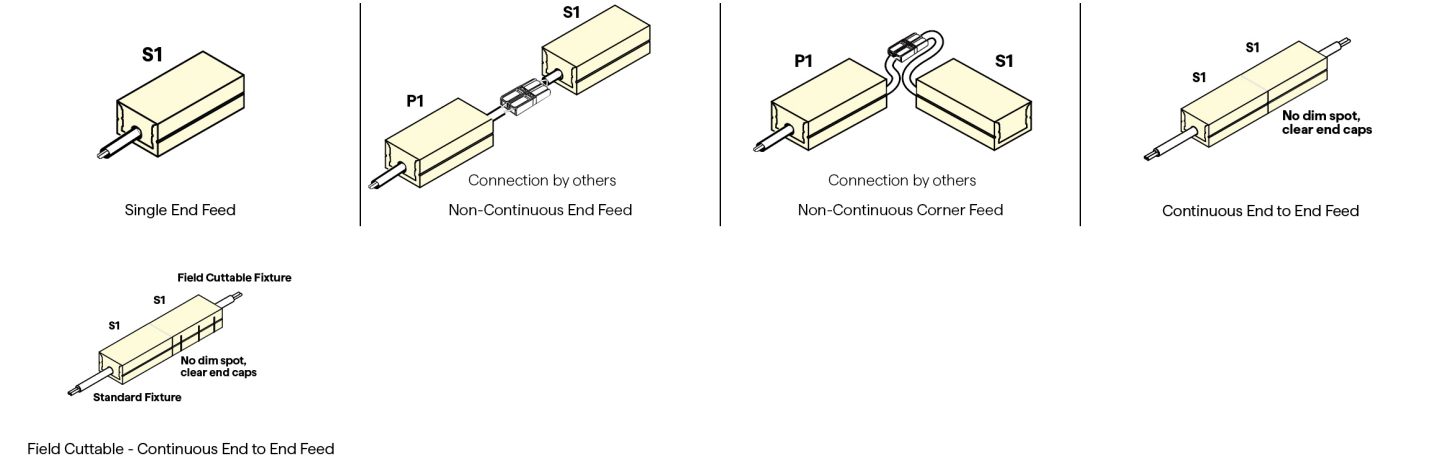





# Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

## FIELD CUTTABLE MARKING

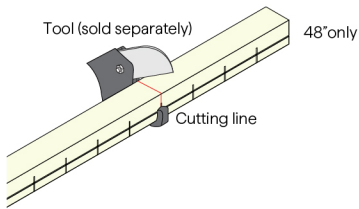


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.


## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



## 10 END CAPS (NO FEED)

TL



Translucent endcaps  
.0" added at end  
.00" dim spot

## 11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"




## 12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

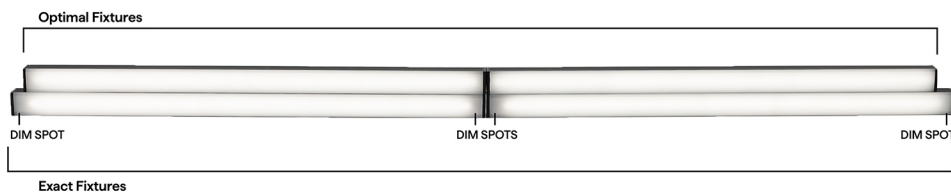



# Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures



## DW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
		
12"	10.58"	10.95"
13"	12.58"	12.95"
14"	12.58"	12.95"
15"	14.58"	14.95"
16"	14.58"	14.95"
17"	16.58"	16.95"
18"	16.58"	16.95"
19"	18.58"	18.95"
20"	18.58"	18.95"
21"	20.58"	20.95"
22"	20.58"	20.95"
23"	22.58"	22.95"
24"	22.58"	22.95"
36"	34.58"	34.95"
48"	46.58"	46.95"
60"	58.58"	58.95"
72"	70.58"	70.95"
84"	82.58"	82.95"
96"	94.58"	94.95"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	




# Q-CAP LUME-01 FOR WARM DIM APPLICATIONS


24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
<b>DALI-2: DT6</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
<b>DALI-2: DT8</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES



## COMPATIBLE WIRING ACCESSORIES



## COMPATIBLE CONTROL ACCESSORIES





# Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage