
VOYA STAFF LIGHT 2.5" COB AMBER

24VDC COB Staff Flood/Accent LED

FPO



- Specification-grade, flood/accent lighting with best-in-class lumen output, color quality, dimming performance, and optical control
- Available in ultra-durable powder-coated 6061 aluminum, polished brass, or polished 316L stainless steel
- Amber light meets Florida Wildlife Commission (FWC) standards for coastal lighting to prevent sea turtle hatchling disorientation
- Flexible tree, surface, wall and ground mounting options support diverse installations
- Field-adjustable output set on site via DIP switch
- Wet listed for exterior applications

1 PRODUCT	2 KNUCKLE	3 CRI	4 CCT	5 SNOOT	6 COB	7 BEAM ANGLE	8 MATERIAL	9 FINISH	10 WATTAGE	11 OUTPUT SETTING	12 STEM LENGTH	13 WEEP HOLE	14 ACCESSORY 1	15 ACCESSORY 2	16 ACCESSORY 3
VOYA-SL-2.5-COB-24VDC-A	ST	N/A	A												

Sample Part Number: **VOYA-SL-2.5-COB-24VDC-A-ST-N/A-A-HR-COB-40-B-P-06-350MA-12-N/A-LS-LV-N/A**

1 PRODUCT

VOYA-SL-2.5-COB-24VDC-A

2 KNUCKLE

ST Standard

3 CRI

N/A

4 CCT

A Amber (>605nm peak)

5 SNOOT

FL Flush
HR 0.5" Regress
1R 1" Regress
30D 30 Degree
45D 45 Degree
60D 60 Degree

GZR Grazer

6 COB

COB All Other

COB All Other

7 BEAM ANGLE

GZR Grazer

8 MATERIAL

A 6061 Aluminum Anodized and Powder Coated

B Brass H59

SS Stainless Steel 316L

9 FINISH

BG Beige
BB Black Bronze
BK Black
BKT Black Texture
BZ Bronze
BZT Bronze Texture
SL Silver
WH White
CU Custom

Lead times differ. BZT parts are readily available. All other standard finishes are painted upon order. Custom finishes: consult factory

P Polished

Brass and Stainless Steel have longer lead times: consult factory

10 WATTAGE

06 6.4 Watts

Refer to delivered lumen output on following pages

6W option includes on board dip switch for field adjustable output with 8 settings

03 3.1 Watts

Refer to delivered lumen output on following pages

11 OUTPUT SETTING

600MA 100% Output
350MA 58% Output
225MA 38% Output
150MA 25% Output
100MA 17% Output
70MA 12% Output
40MA 7% Output
10MA 2% Output

Selection above is factory set. Current settings follow logarithmic reduction in output for linear perception, can be adjusted in the field

N/A Not available for these wattages

12 STEM LENGTH

1 1" Stem Length
2 2" Stem Length
3 3" Stem Length
6 6" Stem Length
9 9" Stem Length
12 12" Stem Length
18 18" Stem Length
24 24" Stem Length
30 30" Stem Length
36 36" Stem Length
42 42" Stem Length
48 48" Stem Length

6"-36" are standard. Other lengths will have longer lead times

13 WEEP HOLE

WPH Weep Hole
N/A No Weep Hole

Not using a weep hole while aiming up will void warranty. FL and GZR snoots do not have weep holes. If FL or GZR is chosen, select N/A

14 ACCESSORY 1

SP Spread Lens
LS Linear Spread Lens
WW Wall Wash Lens
LV Honeycomb Louver
N/A No Accessory

Retaining Ring included with each accessory. Accessories not compatible with GZR options.

15 ACCESSORY 2

SP Spread Lens
LS Linear Spread Lens
WW Wall Wash Lens
LV Honeycomb Louver
N/A No Accessory

Retaining Ring included with each accessory. Accessories not compatible with GZR options.

16 ACCESSORY 3

SP Spread Lens
LS Linear Spread Lens
WW Wall Wash Lens
LV Honeycomb Louver
N/A No Accessory

Retaining Ring included with each accessory. Accessories not compatible with GZR options.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

VOYA STAFF LIGHT 2.5" COB AMBER

24VDC COB Staff Flood/Accent LED


1 PRODUCT - DIMENSIONS




Flush Snoot (FL)



0.5" Regress Snoot (HR)




1" Regress Snoot (1R)




30 Degree Snoot (30D)




45 Degree Snoot (45D)



60 Degree Snoot (60D)



Grazer Snoot (GZR)
*Only to be used with GZR optics



6"-36" are standard. Other lengths will have longer lead times

6 DELIVERED LUMENS


Tested with VOYA-2.5-COB-24VDC-A-ST-95-30-FL at 6W
Grazer COB and Beam Angle are tested with Grazer Snoot

COB - BEAM ANGLE	LUMENS	LM/W	PEAK INTENSITY (CD)	PEAK WAVELENGTH (nm)
COB - 20°	208	32	1302	613
COB - 26°	221	34	996	613
COB - 40°	218	34	473	613
COB - 55°	201	31	258	613
COB - GZR	203	31	634	613


PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.


20°



26°



40°



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

VOYA STAFF LIGHT 2.5" COB AMBER

24VDC COB Staff Flood/Accent LED

9 FINISH

ALUMINUM POWDER COAT FINISHES

Lead times differ. BZT parts are readily available. All other standard finishes are painted upon order.
Custom finishes: consult factory



BRASS AND STAINLESS STEEL POLISHED FINISHES

Brass and Stainless Steel have longer lead times: consult factory



11 DIP SWITCH SETTINGS

VOYA-2.5-24VDC-COB-A

Output								
Rated Current(A)	10	40	70	100	150	225	350	600
DIP Code	⊥⊥⊥	⊤⊥⊥	⊥⊤⊥	⊥⊥⊤	⊤⊤⊥	⊤⊥⊤	⊥⊤⊤	⊤⊤⊤
Rated Power(W)	1.1	1.4	1.7	1.9	2.4	3.1	4.3	6.4

⊤ On ⊥ Off.

14 / 15 / 16 ACCESSORIES

Holds up to three accessories. Retaining Ring included with each accessory. Accessories not compatible GZR option.

SP



Spread Lens

To order separately use ACC-2.5-SP

LS



Linear Spread Lens

To order separately use ACC-2.5-LS

WW



Wall Wash Lens

To order separately use ACC-2.5-WW

LV




Honeycomb Louver

To order separately use ACC-2.5-LV



Retaining Ring

To order separately use ACC-2.5-RR



SNOOT INSTALL KIT

To order separately use VOYA-SNOOT-INSTALL-KIT

COMPATIBLE GLARE CONTROL ACCESSORIES

VOYA-2.5-45D-GLARE-SHIELD-YY-XX



Adjustable 45° Glare Shield. See Spec Sheet for material (YY) and finish (XX) options

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

VOYA STAFF LIGHT 2.5" COB AMBER

24VDC COB Staff Flood/Accent LED

COMPATIBLE POWER SUPPLIES

Specify 0-10V or DALI for smoothest dimming performance. For phase dimming, ELV is recommended. See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.


DIMMING PROTOCOL	INDOOR	OUTDOOR
	VOYA 24VDC	VOYA 24VDC
Non-Dim	QT-CAB-eLED-ND QTM-DC+CAP QTM-eLED-ND QZ-ND	Q-HEX-mini Q-SET-QZ-ND Q-SET-eLED-ND Q-SET-mLED QOM-DC+CAP QOM-eLED-ND QZ-ND
Phase	QT-CAB-QZ-PH/0-10V QZ-BOWTIE+DIMMER QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V	Q-SET-QZ-PH/0-10V QZ-PRO-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QZ-PRO-PH/0-10V QZ-STICK-PH/0-10V	Q-SET-QZ-PH/0-10V QZ-PRO-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN	
DMX	QT-CAB-eLED+DMX	QOM-eLED+DMX QOM-eLED+DMX-PS
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN	QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT6-PS

VOYA EM/SM 2.5" MOUNT COMPATIBILITY

Landscape Lighting

SURFACE/WALL


See Surface/Wall installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.





Q-WB

Wood Beam Mount



Q-MT-11*


With Water Protection



Q-MT-17*



Q-MT-18




Q-MT-19

With Water Protection



Q-MT-21




Q-MT-22




Q-MT-37*

SURFACE/WALL J-BOX PLATES

See Surface/Wall J-Box Plate installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.






Q-MT-24

Compatible with 1 GANG RECTANGLE WEATHER PROOF J-BOX or 4/0 WEATHER PROOF J-BOX by others



Q-MT-25



Q-MT-26

Compatible with 1 GANG RECESS J-BOX or 4/0 RECESSED J-BOX by others



Q-MT-27

Compatible with 3/0 RECESSED J-BOX by others




Q-MT-42*

Compatible with 1 GANG RECTANGLE WEATHER PROOF J-BOX or 4/0 WEATHER PROOF J-BOX by others

TREE MOUNT

See Tree Mount installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.





Q-MT-10



Q-MT-12*




Q-MT-14*

With Tree Strap




Q-MT-39*



Q-MT-50 (No Driver)

With Water Protection and Tree Strap





Q-MT-51*

With Water Protection


DIRECT BURIAL

See Direct Burial installation for dimensions and included hardware. Refer to the mount cut sheets for complete order codes regarding mount's options.





Q-MT-6*




Q-MT-7*

With Water Protection




Q-MT-45*



Q-TRIX-R20* (No Driver)

With Water Protection




Q-TRIX-R50* (With Driver)


With Water Protection

MOUNT ACCESSORIES


See Accessories installation for dimensions and included hardware.



NPS ADAPTER




AY-3 Riser Pole



AY-7

No Water Protection



(RA) ROTATIONAL ADAPTER

With Water Protection

***Compatible with AY-3 Riser Pole**

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting

Specification subject to change. Rev-11-02-26

VOYA EM/SM 2.5" 24VDC COB AMBER

Power Supply Sizing & Wiring


DISTRUBUTED & BRANCH CIRCUITS

VOYA 2.5" COB Amber can be wired as either a distributed load - multiple fixtures tapped along a run, in branches, or in loop/ring circuits – or as a single load at the end of a run. When wiring as a distributed load, refer to VOYA-2.5-24VDC Low Voltage Wiring Guide to size wires within recommended voltage drop limits when these wiring configurations are used. When wiring as a single load at the end of a run, refer to QTL Voltage Drop Calculator.


Input voltage at the fixture should be 22.8V–24V DC for both dimmed and non-dimmed applications.

DIMMING

VOYA 2.5" COB Amber dims by 24VDC PWM output from a compatible QTL power supply as listed in the Compatible Power Supply table on the spec sheet. The curves below show measured output as a 0-10V dimmer is reduced at the input of the remote compatible power supply at four factory driver current settings. VOYA 2.5 24VDC COB fixtures dim down to 0.1%. Specify 0-10V or DALI for smoothest dimming performance. For phase dimming, ELV is recommended

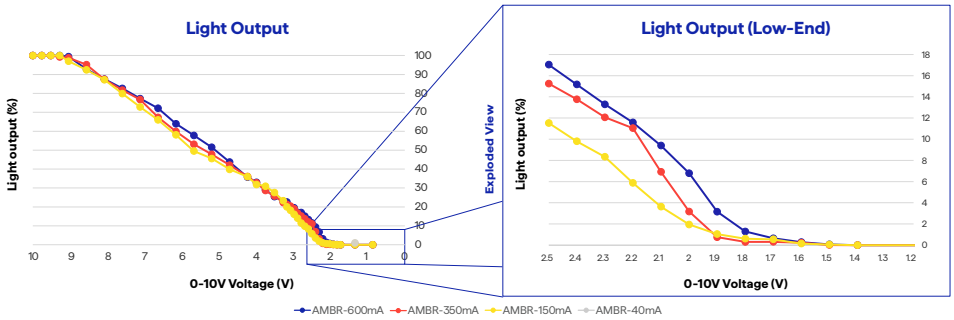

Compatible Dimming Control: Use a compatible QTL power supply. Dimming control feeds into the remote compatible power supply only. Only 2-wire 24V DC power feeds into fixture.

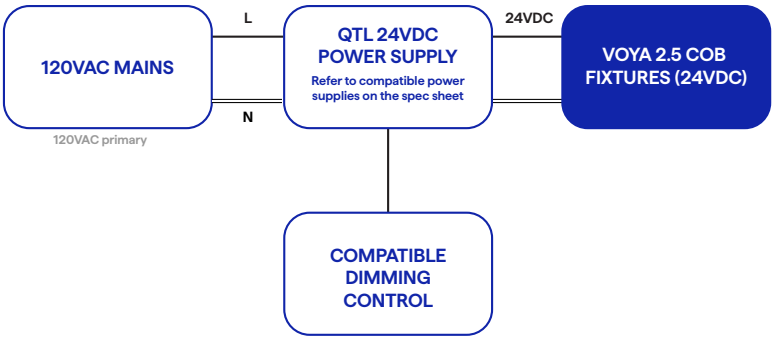

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | QTL.lighting