




## IN-10

12V MR16 35W Halogen/8W LED In Ground Well Light



IN-10 Shown in Bronze Texture Powder Coat Finish (BZT)



Dimensions: 6 5/8" dia. x 11 1/4" tall

- 6061 Marine Grade Aluminum. Eight standard TGIC Free powder coat finishes
- 15 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- Tempered glass lens.
- 6' of 16/2 low voltage cable supplied.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.

① PRODUCT	② MATERIAL	③ Fixture Regress	④ FINISH
IN-10	A		

Sample Part Number: IN-10-A-1-NT

1 PRODUCT	2 MATERIAL	3 Fixture Regress	4 FINISH
IN-10	A Aluminum	<p>1 13/4" Regress</p> <p>2 3" Regress (standard)</p>	<p><b>BG</b> Beige</p> <p><b>BB</b> Black Bronze</p> <p><b>BK</b> Black</p> <p><b>BKT</b> Black Texture</p> <p><b>BZ</b> Bronze</p> <p><b>BZT</b> Bronze Texture</p> <p><b>SL</b> Silver</p> <p><b>WH</b> White</p>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## IN-10

12V MR16 35W Halogen/8W LED In Ground Well Light

### 1 PRODUCT - DIMENSIONS




### 2 MATERIAL



Aluminum

### 4 FINISH

Eight Standard TGIC Free powder coat finishes

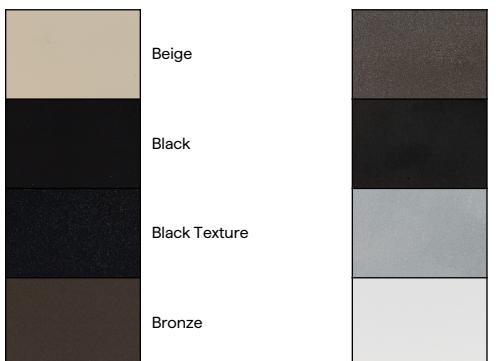

### ACCESSORIES - COLOR FILTERS

Holds up to three accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL Blue Glass Filter To order separately use AY-2-MR16-BL	LB Light Blue Glass Filter To order separately use AY-2-MR16-LB	PK Pink Glass Filter To order separately use AY-2-MR16-PK	AM Amber Glass Filter To order separately use AY-2-MR16-AM	MV Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	RD Red Glass Filter To order separately use AY-2-MR16-RD	GR Green Glass Filter To order separately use AY-2-MR16-GR	DA Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA



## IN-10

12V MR16 35W Halogen/8W LED In Ground Well Light

### ACCESSORIES - LENS

Holds up to three accessories

SP	LI	SO	LV	WI	FR
Spread Lens To order separately use AY-1-MR16-1	Linear Lens To order separately use AY-1-MR16-2	Softening Lens To order separately use AY-1-MR16-3	Louver Lens To order separately use AY-1-MR16-4	Wire Holder To order separately use AY-1-MR16-5	Frosted Lens To order separately use AY-1-MR16-6

### LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain  
Maximum wattage: 35W Halogen/8W LED

MR16	MR16
EMERY ALLEN 1.0W, 3.0W, 5.0W, 7.0W	EMERY ALLEN 3W AMBER

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS