




IN-4

12V MR16 35W Halogen/8W LED In Ground Well Light

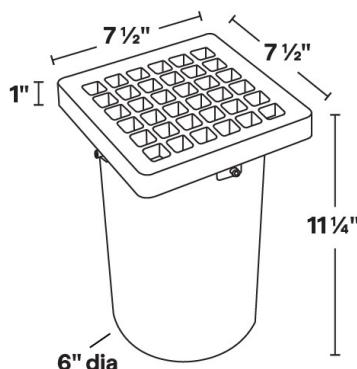

- Bronze frame and grate.
- 10 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- ABS housing: 6"dia. x 10 1/2" OAL.
- Tempered glass lens.
- 6' of 16/2 low voltage cable supplied.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 bi pin porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.

IN-4 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 7 1/2 " square x 11 1/4" high

① PRODUCT	② MATERIAL	③ Fixture Regress	④ FINISH
IN-4	B		

Sample Part Number: IN-4-B-1-NT

1 PRODUCT	2 MATERIAL	3 Fixture Regress	4 FINISH
IN-4	B Bronze	<p>1 13/4" Regress</p> <p>2 3" Regress (standard)</p>	<p>BG Beige</p> <p>BB Black Bronze</p> <p>BK Black</p> <p>BKT Black Texture</p> <p>BZ Bronze</p> <p>BZT Bronze Texture</p> <p>SL Silver</p> <p>WH White</p> <p>DB Dark Bronze</p> <p>NT Natural</p> <p>DB finish has longer lead time</p>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



IN-4

12V MR16 35W Halogen/8W LED In Ground Well Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



Bronze


4 FINISH

Eight Standard TGIC Free powder coat finishes and two bronze finishes



ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

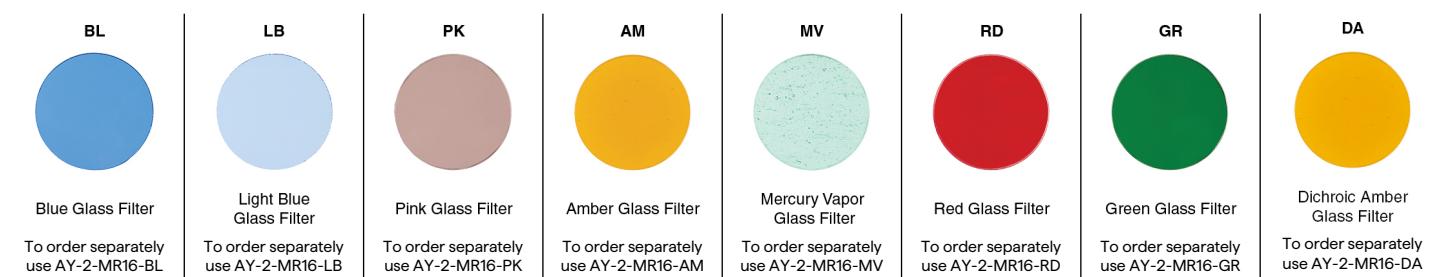




IN-4

12V MR16 35W Halogen/8W LED In Ground Well Light

ACCESSORIES - LENS

Holds up to three accessories

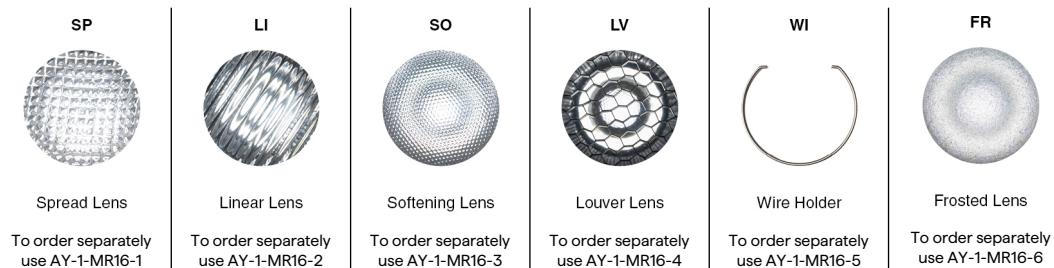

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W halogen/8W LED



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS