




PL-31

12V 20W T4 Marker Light

10 YEAR
WARRANTY
ALUMINUM

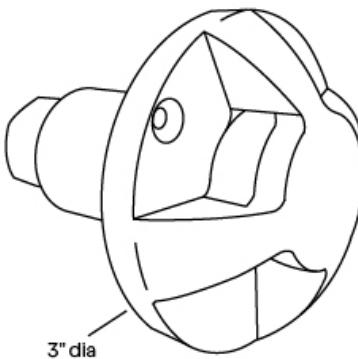

PL-31 Shown in Bronze Powder Coat Finish (BZ)

Weight: 1.5 lbs.

Overall Dimensions: 3" dia. x 3" overall

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Remote transformer required.
- Three opening options, 1, 2 or 4.
- GY 6.35 bi pin porcelain socket.
- Core drill design for masonry (1 1/2" hole required).
- IP 67 rated.
- Tempered frosted glass lens.
- 6 feet of 16/2 low voltage cable supplied.
- Maximum Wattage: 20 watt, 3 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade direct burial landscape lighting, wet-location luminaire for marker lighting applications.

1 PRODUCT	2 MATERIAL	3 OPENINGS	4 FINISH
PL-31	A		

Sample Part Number: **PL-31-A-1-BK**

1 PRODUCT	2 MATERIAL	3 OPENINGS	4 FINISH
PL-31	A 6061 - T6 Aluminum	1 Single 2 2 at 180 Degrees 4 4 at 90 Degrees	BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture CA Clear Anodized SL Silver WH White



10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



PL-31

12V 20W T4 Marker Light

1 PRODUCT - DIMENSIONS




2 MATERIAL



6061 - T6 Aluminum

4 FINISH

Seven standard TGIC powder coat finishes and clear anodized finish available



LAMPS



**PL-31**

12V 20W T4 Marker Light

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

PRELIMINARY
SUBJECT TO CHANGE