




ST-14

12V MR16 20W Halogen/8W LED Core Drill
Step Light



ST-14 Shown in Bronze Texture Powder Coat Finish
(BZT)



Dimensions: 5" dia. faceplate; 4 1/2" length

- 6061 Marine Grade Aluminum, available in eight standard TGIC Free powder coat finishes
- Tempered crystalline spread lens.
- 6' of 16/2 low voltage cable supplied.
- Maximum Wattage: 20W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

1 PRODUCT	2 MATERIAL	3 STYLES	4 FINISH
ST-14	A		

Sample Part Number: **ST-14-A-1-BK**

1 PRODUCT	2 MATERIAL	3 STYLES	4 FINISH
ST-14	A Aluminum	1 1/2 Eyelid Style 2 3/4 Eyelid Style	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White



5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



ST-14

12V MR16 20W Halogen/8W LED Core Drill Step Light

1 PRODUCT - DIMENSIONS

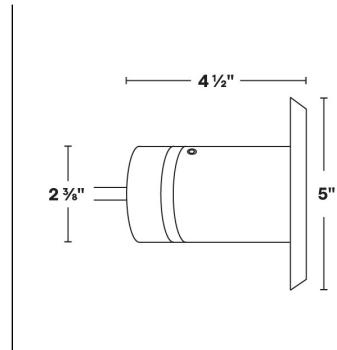


2 MATERIAL



Aluminum

4 FINISH

Eight Standard TGIC Free powder coat finishes

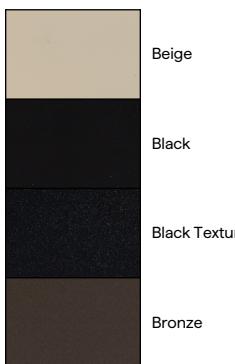

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 20W Halogen/8W LED





ST-14

12V MR16 20W Halogen/8W LED Core Drill Step Light

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS