




TEST - BOTH (4a-Block)

12V MR16 35W, 8W LED In Ground Well Light

25 YEAR
WARRANTY
BRASS

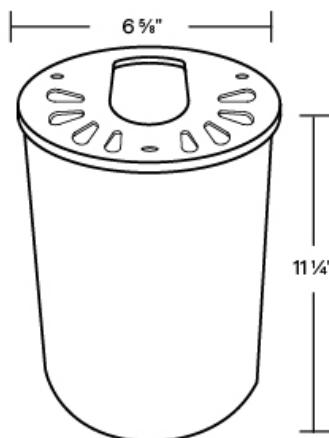

IN-10 Shown in NaturalBrbronze Finish (NT)

Weight: 11.4 lbs. Overall Dimensions: 6 5/8" diameter
x 11 1/4" tall

- Cast aluminum. Seven standard TGIC powder coat finishes and two bronze finishes.
- Remote transformer required.
- GY 6.35 bi pin porcelain socket.
- IP 68 rated.
- 15 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- Tempered glass lens.
- Suitable for drive-over installations.
- 6 feet of 16/2 low voltage cable supplied.
- Maximum Wattage: 35 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 67
- Specification-grade well light, wet-location luminaire for uplighting applications.

① PRODUCT	② MATERIAL	③ Fixture Regress	④ FINISH
IN-10			

Sample Part Number: IN-10-A-1-NT

1 PRODUCT	2 MATERIAL	3 Fixture Regress	4 FINISH
IN-10	<p>A Machined Aluminum</p> <p>B C36000 Brass</p>	<p>1 1 3/4" Regress</p> <p>2 3" Regress (standard)</p> <p>1 1 3/4" Regress</p> <p>2 3" Regress (standard)</p>	<p>AC Aged Copper</p> <p>BG Beige</p> <p>BK Black</p> <p>BKT Black Texture</p> <p>BZ Bronze</p> <p>BZT Bronze Texture</p> <p>SL Silver</p> <p>WH White</p> <p>DB Dark Bronze</p> <p>NT Natural</p>


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




TEST - BOTH (4a-Block)

12V MR16 35W, 8W LED In Ground Well Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



Machined Aluminum
C36000 Brass

4 FINISH

Seven standard TGIC powder coat finishes





TEST - BOTH (4a-Block)

12V MR16 35W, 8W LED In Ground Well Light

ACCESSORIES - COLOR FILTERS

Holds up to three accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter To order separately use AY-2-MR-16-BL	Light Blue Glass Filter To order separately use AY-2-MR-16-LB	Pink Glass Filter To order separately use AY-2-MR-16-PK	Amber Glass Filter To order separately use AY-2-MR-16-AM	Mercury Vapor Glass Filter To order separately use AY-2-MR-16-MV	Red Glass Filter To order separately use AY-2-MR-16-RD	Green Glass Filter To order separately use AY-2-MR-16-GR	Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA

ACCESSORIES - LENS

Holds up to three accessories

SP	LI	SO	LV	WI	FR
Spread Lens To order separately use AY-1-MR16-1	Linear Lens To order separately use AY-1-MR16-2	Softening Lens To order separately use AY-1-MR16-3	Louver Lens To order separately use AY-1-MR16-4	Wire Holder To order separately use AY-1-MR16-5	Frosted Lens To order separately use AY-1-MR16-6

LAMPS

MR16	MR16	MR16	MR16

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS