




TEST - BRASS (4a-Block)

12V MR16 35W, 8W LED In Ground Well Light

25 YEAR
WARRANTY
BRASS

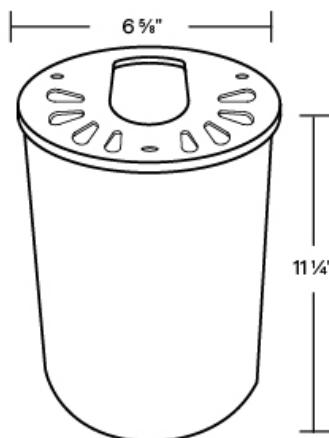

IN-10 Shown in NaturalBrass Finish (NT)

Weight: 11.4 lbs. Overall Dimensions: 6 5/8" diameter x 11 1/4" tall

- Cast aluminum. Seven standard TGIC powder coat finishes and two bronze finishes.
- Remote transformer required.
- GY 6.35 bi pin porcelain socket.
- IP 68 rated.
- 15 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- Tempered glass lens.
- Suitable for drive-over installations.
- 6 feet of 16/2 low voltage cable supplied.
- Maximum Wattage: 35 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 67
- Specification-grade well light, wet-location luminaire for uplighting applications.

① PRODUCT	② MATERIAL	③ Fixture Regress	④ FINISH
IN-10	B		

Sample Part Number: IN-10-A-1-NT

1 PRODUCT	2 MATERIAL	3 Fixture Regress	4 FINISH
IN-10	B C36000 Brass	1 1 3/4" Regress 2 3" Regress (standard)	DB NT Dark Bronze Natural


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



TEST - BRASS (4a-Block)

12V MR16 35W, 8W LED In Ground Well Light

1 PRODUCT - DIMENSIONS

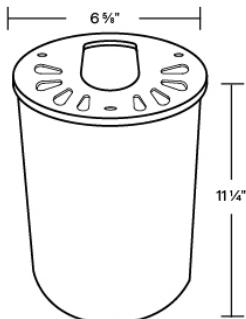

2 MATERIAL



C36000 Brass

4 FINISH

Seven standard TGIC powder coat finishes



Dark Bronze



Natural


ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.




Blue Glass Filter

To order separately
use AY-2-MR-16-BL



Light Blue Glass Filter

To order separately
use AY-2-MR-16-LB




Pink Glass Filter

To order separately
use AY-2-MR-16-PK




Amber Glass Filter

To order separately
use AY-2-MR-16-AM




Mercury Vapor Glass Filter

To order separately
use AY-2-MR-16-MV




Red Glass Filter

To order separately
use AY-2-MR-16-RD



Green Glass Filter

To order separately
use AY-2-MR-16-GR



Dichroic Amber Glass Filter

To order separately
use AY-2-MR16-DA



TEST - BRASS (4a-Block)

12V MR16 35W, 8W LED In Ground Well Light

ACCESSORIES - LENS

Holds up to three accessories

SP	LI	SO	LV	WI	FR
Spread Lens To order separately use AY-1-MR16-1	Linear Lens To order separately use AY-1-MR16-2	Softening Lens To order separately use AY-1-MR16-3	Louver Lens To order separately use AY-1-MR16-4	Wire Holder To order separately use AY-1-MR16-5	Frosted Lens To order separately use AY-1-MR16-6

LAMPS

MR16	MR16	MR16	MR16

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS