




TEST -4b-Block

12V MR16 35W, 8W LED Bollard/Wall Light

10 YEAR
WARRANTY
ALUMINUM

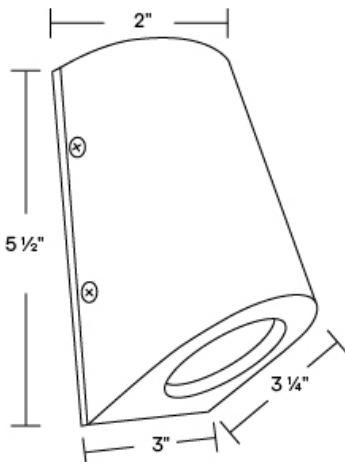

- Cast/machined aluminum materials.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Optional Bollard mounting post available in 18", 24", 36" heights
- Spread lens provide optics for wide distribution.
- Fixed aiming angle of 12° from horizontal.
- Mounting plate fits single gang junction box.
- Maximum Wattage: 35 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or area lighting applications.

PL-25 Shown in Bronze Texture Powder Coat Finish Weight: 1.5 lbs./4.5 lbsOverall Dimensions: 3" W x 3 1/4" L x 5 1/2" H (fixture)
(BZT)

1 PRODUCT	2 OPTION	3 POST HEIGHT	4 FINISH
PL-25			

Sample Part Number: **PL-25-BM-18 -BZT**

1 PRODUCT	2 OPTION	3 POST HEIGHT	4 FINISH
PL-25	0 None BM Bollard Mount	0 None 18 18" 24 24" 36 36"	BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White




10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



TEST -4b-Block


12V MR16 35W, 8W LED Bollard/Wall Light

1 PRODUCT - DIMENSIONS



4 FINISH

Standard TGIC powder coat finishes

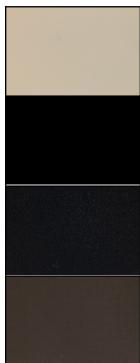

MATERIAL




Machined Aluminum

ACCESSORIES - COLOR FILTERS



Blue Glass Filter
To order separately
use AY-2-MR-16-BL




Light Blue Glass Filter
To order separately
use AY-2-MR-16-LB




Pink Glass Filter
To order separately
use AY-2-MR-16-PK




Amber Glass Filter
To order separately
use AY-2-MR-16-AM



Mercury Vapor Glass Filter
To order separately
use AY-2-MR-16-MV



Red Glass Filter
To order separately
use AY-2-MR-16-RD



Green Glass Filter
To order separately
use AY-2-MR-16-GR



Dichroic Amber Glass Filter
To order separately
use AY-2-MR16-DA



TEST -4b-Block

12V MR16 35W, 8W LED Bollard/Wall Light

LAMPS



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS