




IN-15L

12VAC/DC MR16 9W LED In Ground Well Light

UL LISTED 25 YEAR WARRANTY BRASS

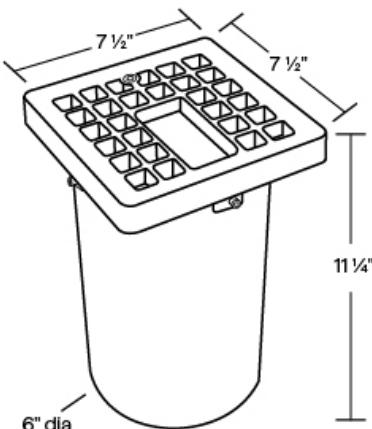

IN-15L Shown in Black Powder Coat Finish (BK)

Dimensions: 7 1/2 " square x 11 1/4" high

- Cast bronze frame and grate.
- Not compatible with electronic transformers.
- 10 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- Tempered glass lens.
- Suitable for drive-over installations.
- 6 feet of 16/2 low voltage cable supplied.
- Input Voltage: 12VAC/DC (remote magnetic transformer required)
- Socket: GY 6.35 Bi-pin Porcelain
- IP Rating: 67
- Specification-grade direct burial landscape lighting, wet-location luminaire for up lighting applications.

1 PRODUCT	2 MATERIAL	3 FINISH	4 LED LAMP
IN-15L	B		

Sample Part Number: IN-15L-B-BK-55

1 PRODUCT	2 MATERIAL	3 FINISH	4 LED LAMP
IN-15L	B Cast Bronze	DB Dark Bronze NT Natural	50 2W-12W, 15° Lens 2700K 210-960 51 2W-12W, 30° Lens 2700K 210-960 52 2W-12W, 45° Lens 2700K 210-960 60 2W-12W, 60° Lens 2700K 230-960 53 2W-12W, 15° Lens 3000K 230-1165 54 2W-12W, 30° Lens 3000K 230-1165 55 2W-12W, 45° Lens 3000K 230-1165 61 2W-12W, 60° Lens 3000K 230-1165
			CRI = 80 Adjustable LED Module


25 year warranty for Brass | 25 year warranty for Brass Warranty Length | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



IN-15L

12VAC/DC MR16 9W LED In Ground Well Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



Cast Bronze

3 FINISH

Standard TGIC powder coat finishes

FPO	Aged Copper	FPO	Bronze Texture
	Beige		Dark Bronze
	Black		Natural
	Black Texture		Silver
	Bronze		White

ACCESSORIES - COLOR FILTERS

Holds up to two accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL 	LB 	PK 	AM 	MV 	RD 	GR 	DA
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR-16-BL	To order separately use AY-2-MR-16-LB	To order separately use AY-2-MR-16-PK	To order separately use AY-2-MR-16-AM	To order separately use AY-2-MR-16-MV	To order separately use AY-2-MR-16-RD	To order separately use AY-2-MR-16-GR	To order separately use AY-2-MR-16-DA



IN-15L

12VAC/DC MR16 9W LED In Ground Well Light

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

PRELIMINARY
SUBJECT TO CHANGE



12W MULT LEVEL LED

MR16 LED MODULE



- Equivalent to MR16 20W/35W/50W Halogen (equivalent CBCP)
- 2700K or 3000K
- 12VAC/DC
- 15W startup draw
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- Field replaceable
- Pb Free

12W Mult-Level - 2W, 4W, 6W, 9W
(210 - 1165 Lumens)

LED MODULE SPECIFICATIONS

[Calculated L70 = 60000 hour]

LED MODULE	WATTAGE	CCT	LENS	2W	4W	6W	9W	12W
50	2W-12W	2700K	15	210 Lumens	340 Lumens	580 Lumens	820 Lumens	960 Lumens
51	2W-12W	2700K	30	210 Lumens	340 Lumens	580 Lumens	820 Lumens	960 Lumens
52	2W-12W	2700K	45	210 Lumens	340 Lumens	580 Lumens	820 Lumens	960 Lumens
60	2W-12W	2700K	60	210 Lumens	340 Lumens	580 Lumens	820 Lumens	960 Lumens
53	2W-12W	3000K	15	230 Lumens	385 Lumens	670 Lumens	915 Lumens	1165 Lumens
54	2W-12W	3000K	30	190 Lumens	360 Lumens	530 Lumens	800 Lumens	1165 Lumens
55	2W-12W	3000K	45	190 Lumens	360 Lumens	530 Lumens	800 Lumens	1165 Lumens
61	2W-12W	3000K	60	190 Lumens	360 Lumens	530 Lumens	800 Lumens	1165 Lumens

LED LENS

Interchangeable lens: 15°, 30°, 45°, 60°



15° Lens



45° Lens



30° Lens



60° Lens